



SGM8301/2/4

100MHz, High Voltage, Rail-to-Rail Output Amplifiers

GENERAL DESCRIPTION

The SGM8301 (single), SGM8302 (dual) and SGM8304 (quad) are unity gain stable devices that combine high speed performance and rail-to-rail outputs. These devices are targeted for applications where an input or an output is exposed to the outside world, such as video and communications.

These devices can operate from $\pm 2.25V$ to $\pm 6V$ dual power supplies or from $+4.5V$ to $+12V$ single supplies. The common mode input voltage range extends to the negative power-supply rail (ground in single-supply applications).

The SGM8301/2/4 consume only 8.5mA of quiescent supply current per amplifier while achieving a 100MHz -3dB bandwidth, 56MHz small signal bandwidth for -0.1dB gain flatness, and a 155V/ μ s slew rate.

The SGM8301 single is available in Green SOT-23-5, MSOP-8 and SOIC-8 packages. The SGM8302 dual is available in Green SOIC-8 and MSOP-8 packages. The SGM8304 quad is available in Green SOIC-14 and TSSOP-14 packages. The SGM8301/2/4 are specified over the extended $-40^{\circ}C$ to $+85^{\circ}C$ temperature range.

FEATURES

- **+4.5V to +12V Single Supplies or $\pm 2.25V$ to $\pm 6V$ Dual Power Supplies**
- **High Speed**
 - 100MHz -3dB Bandwidth**
 - 56MHz -0.1dB Gain Flatness**
 - 155V/ μ s Slew Rate**
- **Rail-to-Rail Output**
- **Low Differential Gain/Phase: 0.02%/0.02°**
- **High Output Drive: 103mA**
- **-40°C to +85°C Operating Temperature Range**
- **Small Packaging:**
 - SGM8301 Available in SOT-23-5, SOIC-8 and MSOP-8**
 - SGM8302 Available in MSOP-8 and SOIC-8**
 - SGM8304 Available in SOIC-14 and TSSOP-14**

APPLICATIONS

Video Line Driver
Video-on-Demand
Set-Top Boxes
Surveillance Video Systems
Analog-to-Digital Converter Interface
CCD Imaging Systems
Digital Cameras




PACKAGE/ORDERING INFORMATION

| MODEL | ORDER NUMBER | PACKAGE DESCRIPTION | PACKAGE OPTION | MARKING INFORMATION |
|---------|------------------|---------------------|---------------------|---------------------|
| SGM8301 | SGM8301YS8G/TR | SOIC-8 | Tape and Reel, 2500 | SGM8301YS8 |
| | SGM8301YMS8G/TR | MSOP-8 | Tape and Reel, 3000 | SGM8301YMS8 |
| | SGM8301YN5G/TR | SOT-23-5 | Tape and Reel, 3000 | SA6XX |
| SGM8302 | SGM8302YS8G/TR | SOIC-8 | Tape and Reel, 2500 | SGM8302YS8 |
| | SGM8302YMS8G/TR | MSOP-8 | Tape and Reel, 3000 | SGM8302YMS8 |
| SGM8304 | SGM8304YS14G/TR | SOIC-14 | Tape and Reel, 2500 | SGM8304YS14 |
| | SGM8304YTS14G/TR | TSSOP-14 | Tape and Reel, 3000 | SGM8304YTS14 |

NOTE: Package marking is defined as the follow:

MARKING INFORMATION

SA6 X X

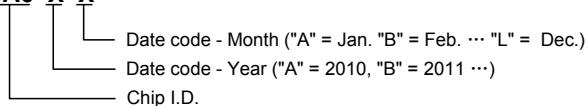

For example: SA6CA (2012, January)

ABSOLUTE MAXIMUM RATINGS

| | |
|---|--|
| Supply Voltage ($+V_S$ to $-V_S$) | -0.3V to +13.2V |
| IN_+ , IN_- , OUT_- | ($-V_S - 0.3V$) to ($+V_S + 0.3V$) |
| Differential Input Voltage | $\pm 2.5V$ |
| Operating Temperature Range | -40°C to +85°C |
| Junction Temperature..... | +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (Soldering, 10s) | +260°C |
| ESD Susceptibility | |
| HBM (SGM8301/4)..... | 3000V |
| HBM (SGM8302)..... | 2000V |
| MM..... | 250V |





NOTE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

SGMICRO reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact SGMICRO sales office to get the latest datasheet.

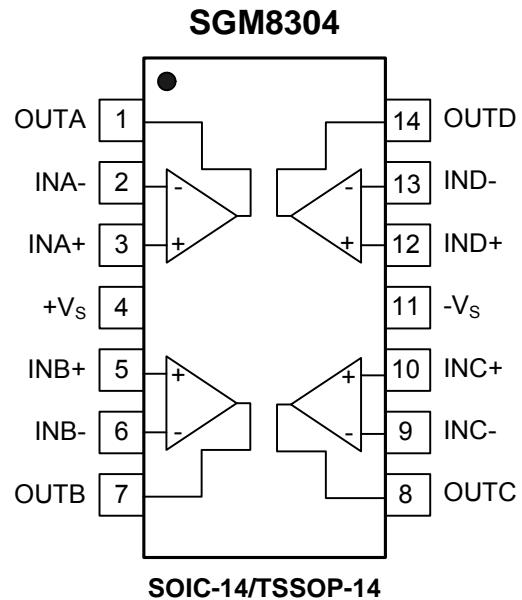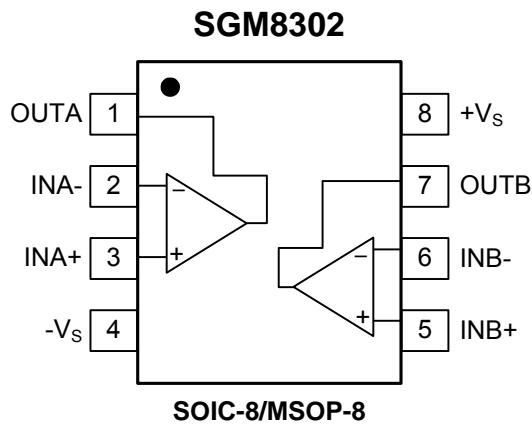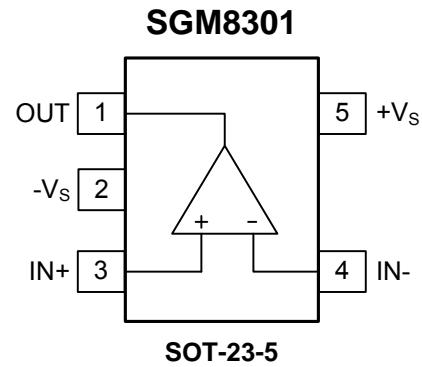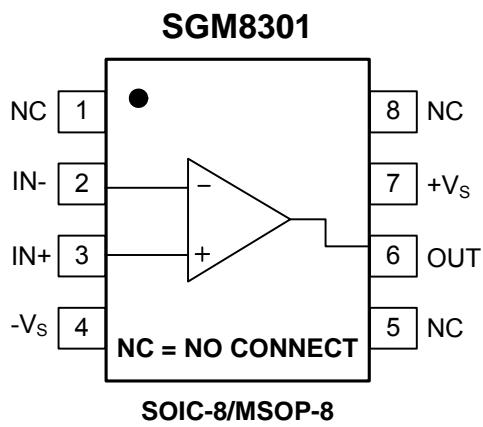PIN CONFIGURATIONS (TOP VIEW)

SGM8301/2/4

100MHz, High Voltage, Rail-to-Rail Output Amplifiers

ELECTRICAL CHARACTERISTICS: $V_S = +5V$

(At $T_A = +25^\circ C$, $V_{CM} = V_S/2$, $V_{OUT} = V_S/2$ and $R_L = 100\Omega$ to $V_S/2$, unless otherwise noted.)







| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|---|-------|-------|------|------------------|
| DC PERFORMANCE | | | | | |
| Quiescent Current/Amplifier (I_Q) | $I_{OUT} = 0mA$ | | 7.5 | 10.2 | mA |
| Input Offset Voltage (V_{OS}) | | -18 | 5 | 18 | mV |
| | $T_A = -40^\circ C$ to $+85^\circ C$ | -21.5 | | 21.5 | |
| Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$) | | | 12 | | $\mu V/^\circ C$ |
| Open-Loop Gain (A_{OL}) | $R_L = 50\Omega$, $1.3V \leq V_{OUT} \leq 3.7V$ | | 88 | | dB |
| | $R_L = 150\Omega$, $0.6V \leq V_{OUT} \leq 4.4V$ | 82 | 100 | | |
| | $R_L = 2k\Omega$, $0.4V \leq V_{OUT} \leq 4.6V$ | 85 | 105 | | |
| Power Supply Rejection Ratio (PSRR) | $V_S = 4.5V$ to $13.2V$ | 65 | 80 | | dB |
| Common Mode Rejection Ratio (CMRR) | $V_{CM} = -0.1V$ to $2.75V$ | 58 | 75 | | dB |
| High Output Voltage Swing from Rail (V_{OH}) | $R_L = 2k\Omega$ to $V_S/2$ | | 60 | 115 | mV |
| | $R_L = 150\Omega$ to $V_S/2$ | | 405 | 517 | |
| | $R_L = 75\Omega$ to $V_S/2$ | | 700 | | |
| | $R_L = 75\Omega$ to ground | | 1.515 | | V |
| Low Output Voltage Swing from Rail (V_{OL}) | $R_L = 2k\Omega$ to $V_S/2$ | | 33 | 49.5 | mV |
| | $R_L = 150\Omega$ to $V_S/2$ | | 340 | 428 | |
| | $R_L = 75\Omega$ to $V_S/2$ | | 600 | | |
| | $R_L = 75\Omega$ to ground | | 3.2 | | |
| Output Current (I_{OUT}) | $R_L = 75\Omega$ to V_S , sink | 39.5 | 50 | | mA |
| | $R_L = 75\Omega$ to ground, source | 37 | 47 | | |
| Output Short Circuit Current (I_{SC}) | $R_L = 10\Omega$ to V_S , sink | | 100 | | |
| | $R_L = 10\Omega$ to ground, source | | 75 | | |
| AC PERFORMANCE | | | | | |
| Small-Signal -3dB Bandwidth (BW_{SS}) | $G = +1$ | | 110 | | MHz |
| Large-Signal -3dB Bandwidth (BW_{LS}) | $G = +1$ | | 51 | | |
| Small-Signal Bandwidth for -0.1dB Gain Flatness ($BW_{0.1dBSS}$) | $G = +1$ | | 52 | | |
| Large-Signal Bandwidth for -0.1dB Gain Flatness ($BW_{0.1dBLS}$) | $G = +1$ | | 32 | | |
| Gain-Bandwidth Product (GBP) | $G = +100$ | | 57 | | MHz |
| Phase Margin (PM) | $G = +100$ | | 44 | | degrees |
| Channel-to-Channel Crosstalk | $V_{IN} = 200mV_{P-P}$, $f = 1kHz$ | | 106 | | dB |
| Overload Recovery Time (ORT) | $f = 1kHz$ | | 115 | | ns |
| Voltage Noise Density (e_n) | $f = 1kHz$ | | 175 | | nV/\sqrt{Hz} |
| | $f = 10kHz$ | | 65 | | |
| Slew Rate (SR) Up | $f = 1kHz$, $2V_{P-P}$ output | | 115 | | $V/\mu s$ |
| Slew Rate (SR) Down | $f = 1kHz$, $2V_{P-P}$ output | | 140 | | $V/\mu s$ |
| Settling Time to 0.1% (t_s) | $f = 1kHz$, $2V_{P-P}$ output | | 65 | | ns |
| Rise/Fall Time (t_R/t_F) | $f = 1kHz$, $V_{OUT} = 100mV_{P-P}$ | | 7.8 | | ns |
| Differential Gain Error (DG) | NTSC | | 0.09 | | % |
| Differential Phase Error (DP) | NTSC | | 0.4 | | degrees |

ELECTRICAL CHARACTERISTICS: $V_S = \pm 6V$ (At $T_A = +25^\circ C$, $V_{CM} = 0V$, $V_{OUT} = 0V$ and $R_L = 100\Omega$ to ground, unless otherwise noted.)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|--|-------|------|------|------------------|
| DC PERFORMANCE | | | | | |
| Quiescent Current/Amplifier (I_Q) | $I_{OUT} = 0mA$ | | 8.5 | 11.3 | mA |
| Input Offset Voltage (V_{OS}) | | -18 | 5 | 18 | mV |
| | $T_A = -40^\circ C$ to $+85^\circ C$ | -21.5 | | 21.5 | |
| Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$) | | | 11 | | $\mu V/^\circ C$ |
| Open-Loop Gain (A_{OL}) | $R_L = 150\Omega$, $-4.5V \leq V_{OUT} \leq 4.5V$ | 85 | 94 | | dB |
| | $R_L = 2k\Omega$, $-4.9V \leq V_{OUT} \leq 4.9V$ | 90 | 110 | | |
| Common Mode Rejection Ratio (CMRR) | $V_{CM} = -6.1V$ to $3.75V$ | 66 | 82 | | dB |
| High Output Voltage Swing from Rail (V_{OH}) | $R_L = 2k\Omega$ to ground | | 90 | 147 | mV |
| | $R_L = 150\Omega$ to ground | | 760 | 956 | |
| Low Output Voltage Swing from Rail (V_{OL}) | $R_L = 2k\Omega$ to ground | | 87 | 116 | mV |
| | $R_L = 150\Omega$ to ground | | 888 | 1080 | |
| Output Current (I_{OUT}) | $R_L = 75\Omega$ to V_S | 71 | 103 | | mA |
| | $R_L = 75\Omega$ to $-V_S$ | 53 | 90 | | |
| AC PERFORMANCE | | | | | |
| Small-Signal -3dB Bandwidth (BW _{SS}) | $G = +1$ | | 100 | | MHz |
| Large-Signal -3dB Bandwidth (BW _{Ls}) | $G = +1$ | | 44 | | |
| Small-Signal Bandwidth for -0.1dB Gain Flatness (BW _{0.1dBSS}) | $G = +1$ | | 56 | | |
| Large-Signal Bandwidth for -0.1dB Gain Flatness (BW _{0.1dBLS}) | $G = +1$ | | 30 | | |
| Gain-Bandwidth Product (GBP) | $G = +100$ | | 60 | | MHz |
| Phase Margin (PM) | $G = +100$ | | 42 | | degrees |
| Channel-to-Channel Crosstalk | $V_{IN} = 200mV_{P-P}$, $f = 1kHz$ | | 106 | | dB |
| Overload Recovery Time (ORT) | $f = 1kHz$ | | 54 | | ns |
| Voltage Noise Density (e_n) | $f = 1kHz$ | | 174 | | nV/\sqrt{Hz} |
| | $f = 10kHz$ | | 65 | | |
| Slew Rate (SR) Up | $f = 1kHz$, $2V_{P-P}$ output | | 145 | | $V/\mu s$ |
| Slew Rate (SR) Down | $f = 1kHz$, $2V_{P-P}$ output | | 155 | | $V/\mu s$ |
| Settling Time to 0.1% (t_s) | $f = 1kHz$, $2V_{P-P}$ output | | 84 | | ns |
| Rise/Fall Time (t_R/t_F) | $f = 1kHz$, $V_{OUT} = 100mV_{P-P}$ | | 7.5 | | ns |
| Differential Gain Error (DG) | NTSC | | 0.02 | | % |
| Differential Phase Error (DP) | NTSC | | 0.02 | | degrees |







TYPICAL PERFORMANCE CHARACTERISTICS




At $T_A = +25^\circ\text{C}$, $+V_S = +5\text{V}$, $-V_S = -5\text{V}$, $V_{CM} = 0\text{V}$ and $R_L = 100\Omega$ to GND, unless otherwise noted.

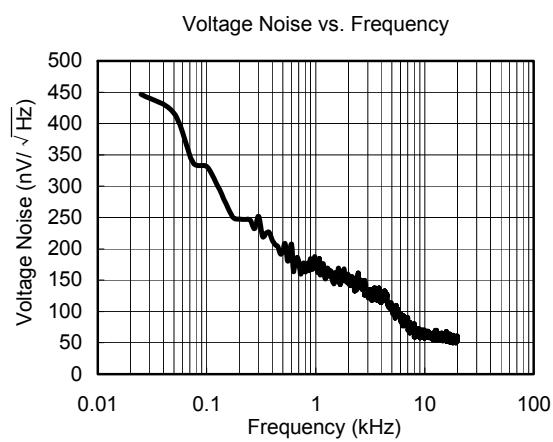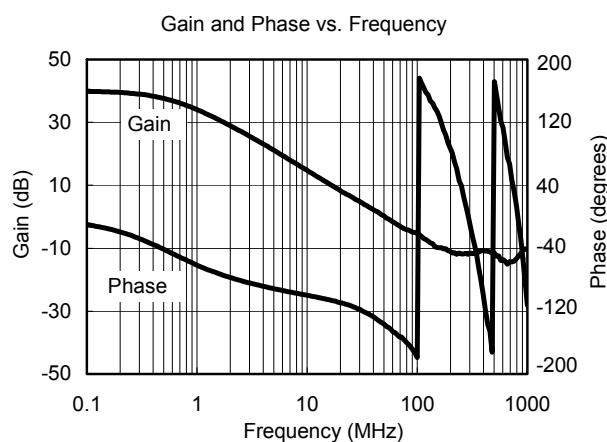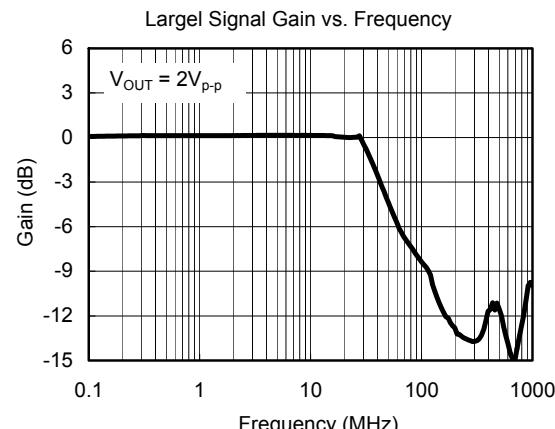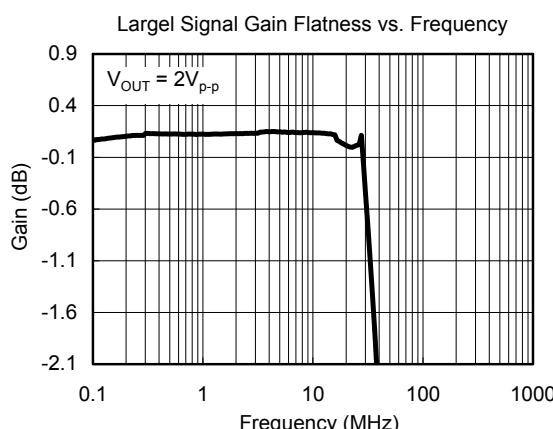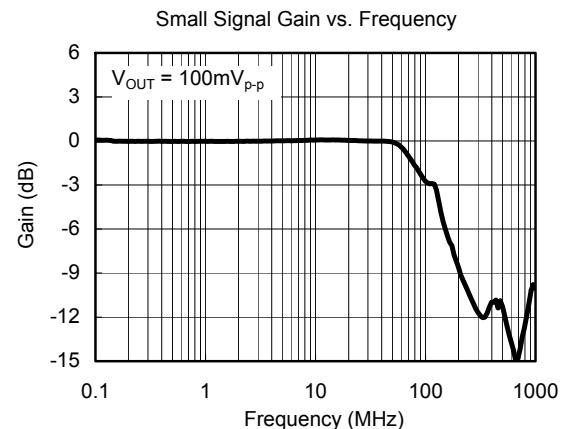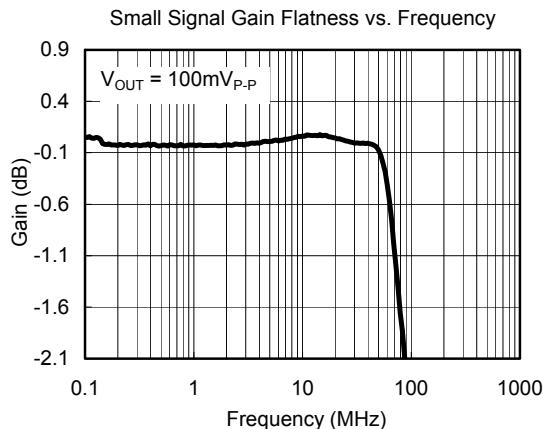

TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $+V_S = +5\text{V}$, $-V_S = -5\text{V}$, $V_{CM} = 0\text{V}$ and $R_L = 100\Omega$ to GND, unless otherwise noted.

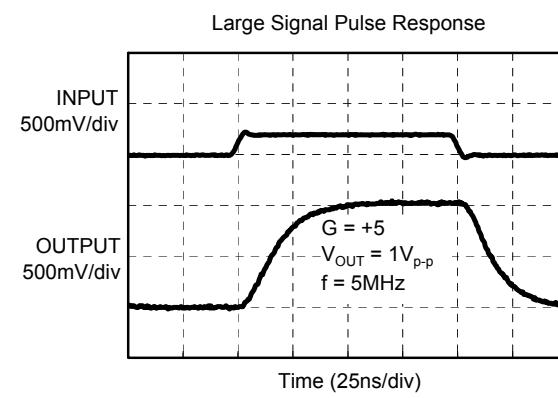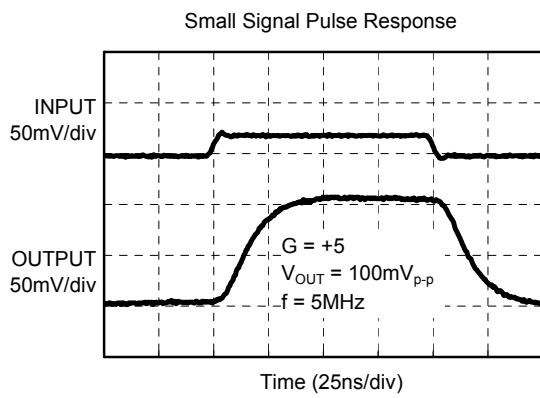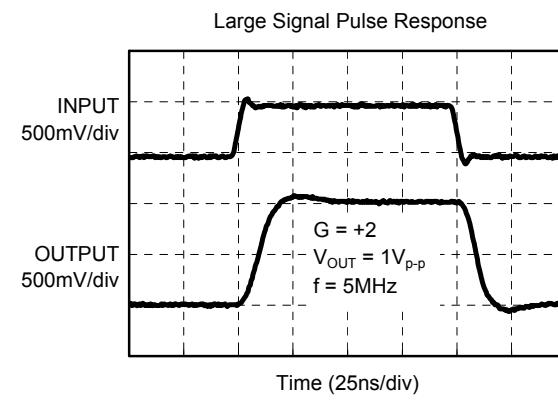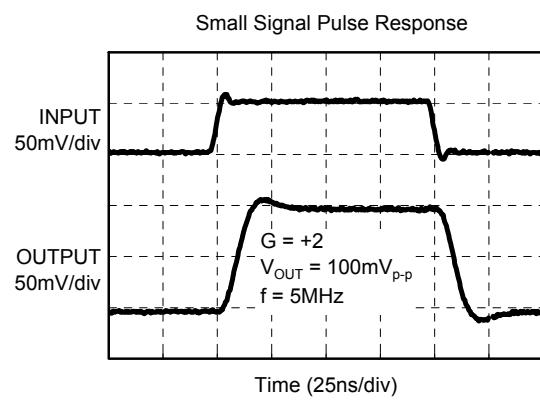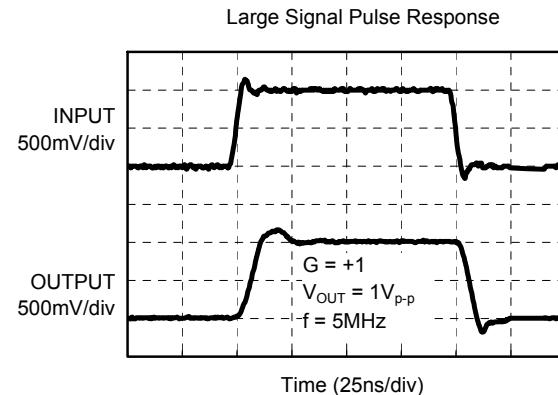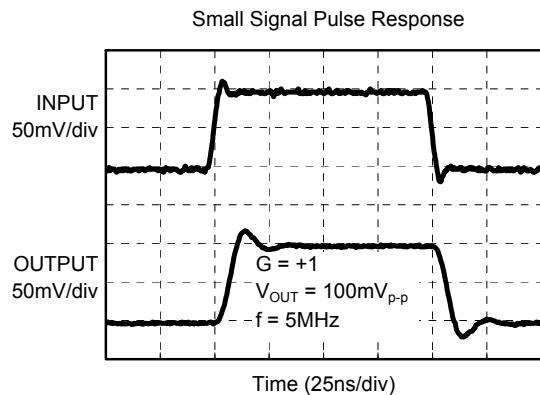

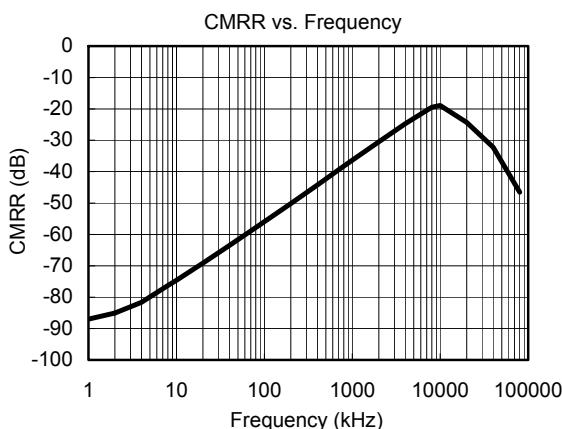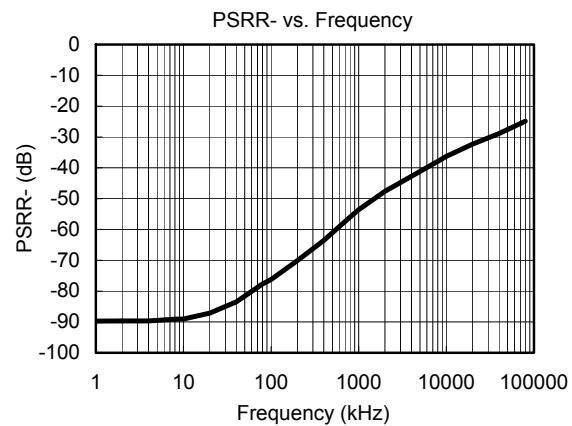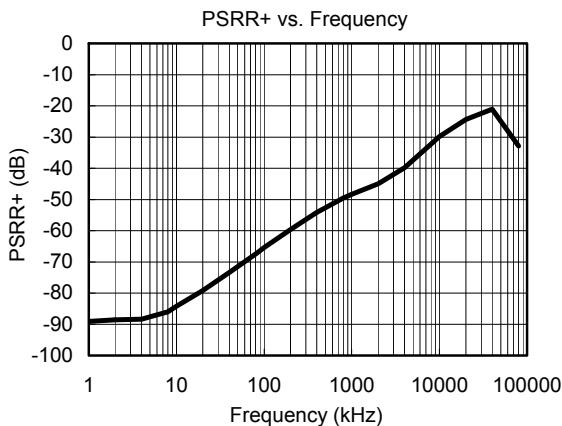TYPICAL PERFORMANCE CHARACTERISTICSAt $T_A = +25^\circ\text{C}$, $+V_S = +5\text{V}$, $-V_S = -5\text{V}$, $V_{CM} = 0\text{V}$ and $R_L = 100\Omega$ to GND, unless otherwise noted.

TYPICAL APPLICATION CIRCUIT

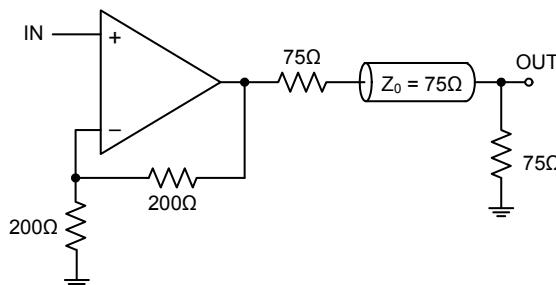


Figure 1. Video Line Driver

APPLICATION



Layout and Power Supply Bypassing

The SGM8301/2/4 operate from single +4.5V to +12V or from dual $\pm 2.25V$ to $\pm 6V$ supplies. Bypass each supply with a $0.1\mu F$ capacitor as close to the pin as possible. SGMC recommends using micro-strip and stripline techniques to obtain full bandwidth. To ensure that the PC board does not degrade the amplifier's performance, design it for a frequency greater than 1GHz. Pay careful attention to inputs and outputs to avoid large parasitic capacitance. Whether or not you use a constant impedance board, observe the following design guidelines:



- Do not use wire-wrap boards; they are too inductive.
- Do not use IC sockets; they increase parasitic capacitance and inductance.
- Use surface-mount instead of through-hole components for better, high frequency performance.
- Use a PC board with at least two layers; it should be as free from voids as possible.
- Keep signal lines as short and as straight as possible. Do not make 90° turns; round all corners.

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

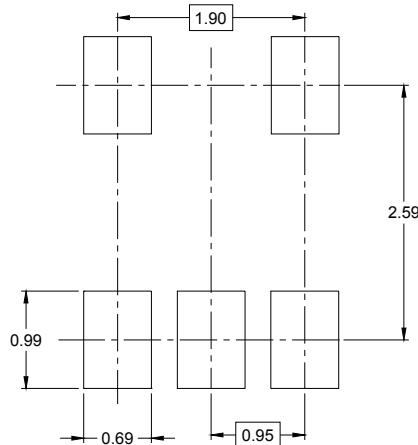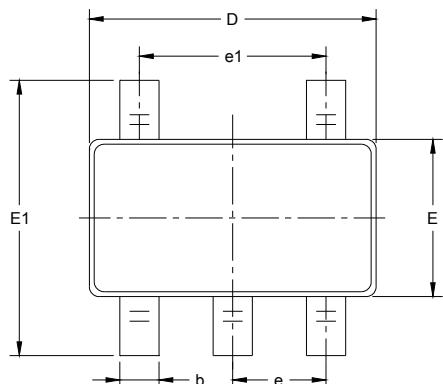



RECOMMENDED LAND PATTERN (Unit: mm)

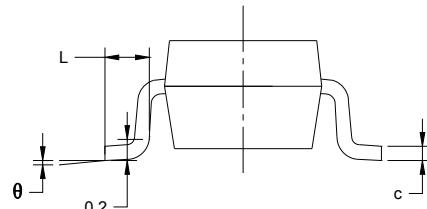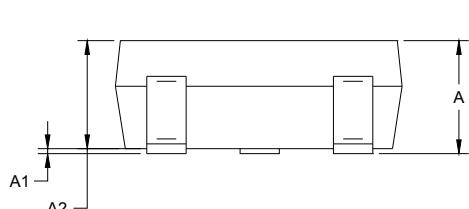



| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950 BSC | | 0.037 BSC | |
| e1 | 1.900 BSC | | 0.075 BSC | |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

PACKAGE OUTLINE DIMENSIONS

SOIC-8

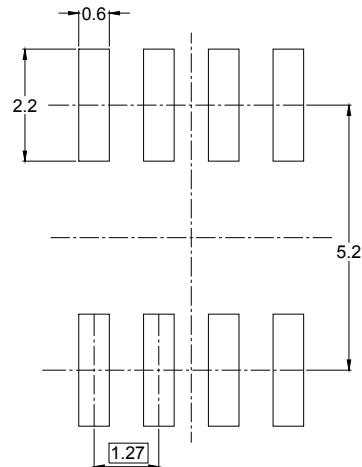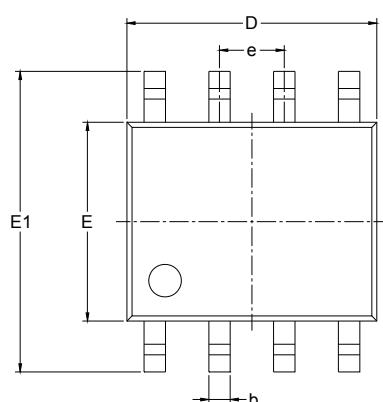



RECOMMENDED LAND PATTERN (Unit: mm)

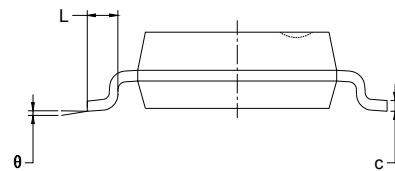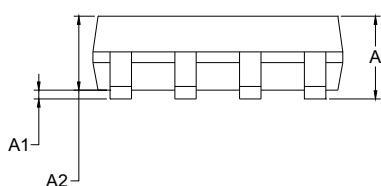



| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.350 | 1.750 | 0.053 | 0.069 |
| A1 | 0.100 | 0.250 | 0.004 | 0.010 |
| A2 | 1.350 | 1.550 | 0.053 | 0.061 |
| b | 0.330 | 0.510 | 0.013 | 0.020 |
| c | 0.170 | 0.250 | 0.006 | 0.010 |
| D | 4.700 | 5.100 | 0.185 | 0.200 |
| E | 3.800 | 4.000 | 0.150 | 0.157 |
| E1 | 5.800 | 6.200 | 0.228 | 0.244 |
| e | 1.27 BSC | | 0.050 BSC | |
| L | 0.400 | 1.270 | 0.016 | 0.050 |
| θ | 0° | 8° | 0° | 8° |

PACKAGE OUTLINE DIMENSIONS

MSOP-8

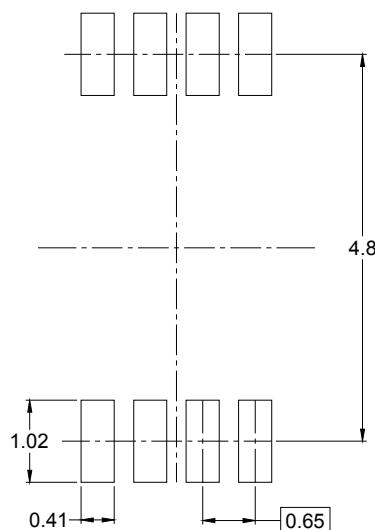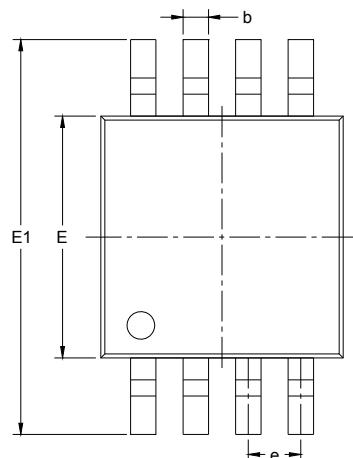



RECOMMENDED LAND PATTERN (Unit: mm)

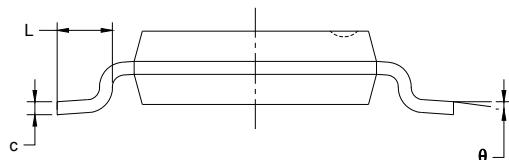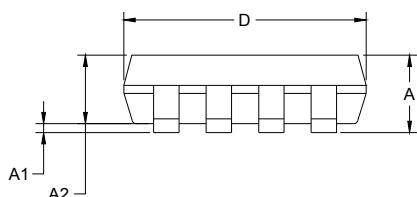



| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.820 | 1.100 | 0.032 | 0.043 |
| A1 | 0.020 | 0.150 | 0.001 | 0.006 |
| A2 | 0.750 | 0.950 | 0.030 | 0.037 |
| b | 0.250 | 0.380 | 0.010 | 0.015 |
| c | 0.090 | 0.230 | 0.004 | 0.009 |
| D | 2.900 | 3.100 | 0.114 | 0.122 |
| E | 2.900 | 3.100 | 0.114 | 0.122 |
| E1 | 4.750 | 5.050 | 0.187 | 0.199 |
| e | 0.650 BSC | | 0.026 BSC | |
| L | 0.400 | 0.800 | 0.016 | 0.031 |
| θ | 0° | 6° | 0° | 6° |

PACKAGE OUTLINE DIMENSIONS

SOIC-14

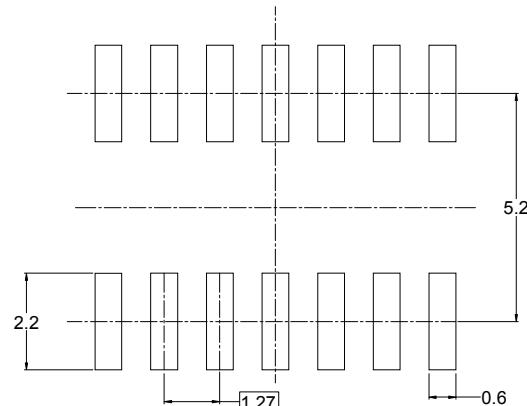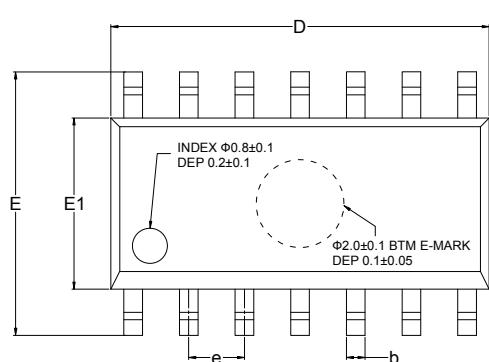


RECOMMENDED LAND PATTERN (Unit: mm)

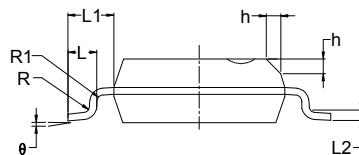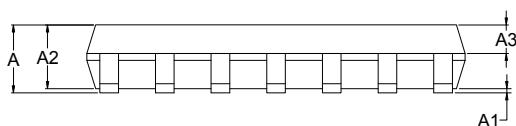

| Symbol | Dimensions In Millimeters | | | Dimensions In Inches | | |
|--------|---------------------------|-----|------|----------------------|-----|-------|
| | MIN | MOD | MAX | MIN | MOD | MAX |
| A | 1.35 | | 1.75 | 0.053 | | 0.069 |
| A1 | 0.10 | | 0.25 | 0.004 | | 0.010 |
| A2 | 1.25 | | 1.65 | 0.049 | | 0.065 |
| A3 | 0.55 | | 0.75 | 0.022 | | 0.030 |
| b | 0.36 | | 0.49 | 0.014 | | 0.019 |
| D | 8.53 | | 8.73 | 0.336 | | 0.344 |
| E | 5.80 | | 6.20 | 0.228 | | 0.244 |
| E1 | 3.80 | | 4.00 | 0.150 | | 0.157 |
| e | 1.27 BSC | | | 0.050 BSC | | |
| L | 0.45 | | 0.80 | 0.018 | | 0.032 |
| L1 | 1.04 REF | | | 0.040 REF | | |
| L2 | 0.25 BSC | | | 0.01 BSC | | |
| R | 0.07 | | | 0.003 | | |
| R1 | 0.07 | | | 0.003 | | |
| h | 0.30 | | 0.50 | 0.012 | | 0.020 |
| θ | 0° | | 8° | 0° | | 8° |

PACKAGE OUTLINE DIMENSIONS

TSSOP-14

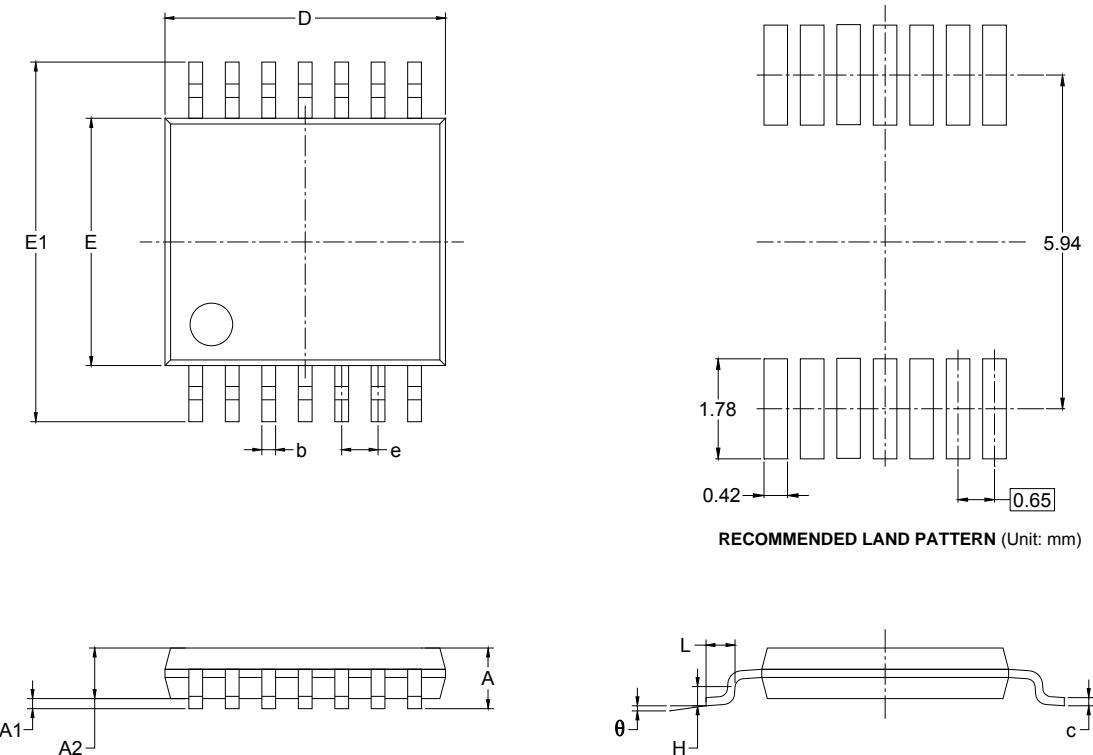


RECOMMENDED LAND PATTERN (Unit: mm)


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | | 1.100 | | 0.043 |
| A1 | 0.050 | 0.150 | 0.002 | 0.006 |
| A2 | 0.800 | 1.000 | 0.031 | 0.039 |
| b | 0.190 | 0.300 | 0.007 | 0.012 |
| c | 0.090 | 0.200 | 0.004 | 0.008 |
| D | 4.900 | 5.100 | 0.193 | 0.201 |
| E | 4.300 | 4.500 | 0.169 | 0.177 |
| E1 | 6.250 | 6.550 | 0.246 | 0.258 |
| e | 0.650 BSC | | 0.026 BSC | |
| L | 0.500 | 0.700 | 0.02 | 0.028 |
| H | 0.25 TYP | | 0.01 TYP | |
| θ | 1° | 7° | 1° | 7° |

TAPE AND REEL INFORMATION

REEL DIMENSIONS

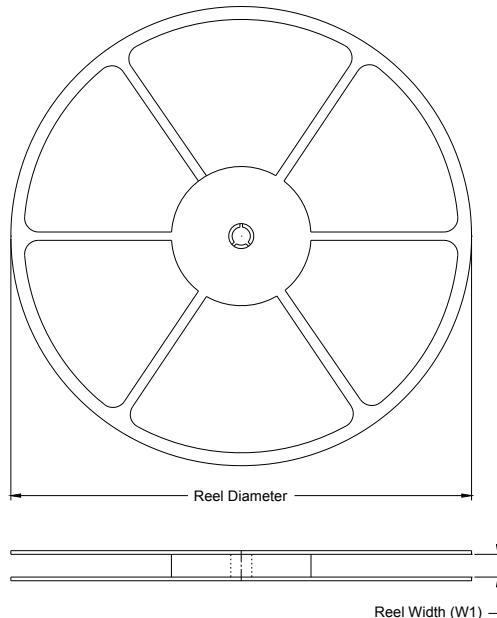


TAPE DIMENSIONS

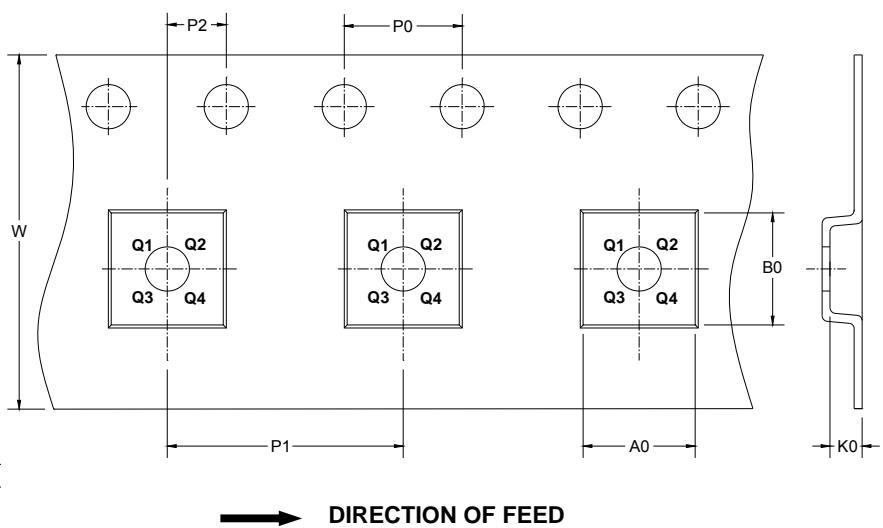

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------------|------------|------------|------------|------------|------------|------------|-----------|------------------|
| SOT-23-5 | 7" | 9.5 | 3.17 | 3.23 | 1.37 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |
| SOIC-8 | 13" | 12.4 | 6.4 | 5.4 | 2.1 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |
| MSOP-8 | 13" | 12.4 | 5.2 | 3.3 | 1.5 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |
| SOIC-14 | 13" | 16.4 | 6.6 | 9.3 | 2.1 | 4.0 | 8.0 | 2.0 | 16.0 | Q1 |
| TSSOP-14 | 13" | 12.4 | 6.95 | 5.6 | 1.2 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |

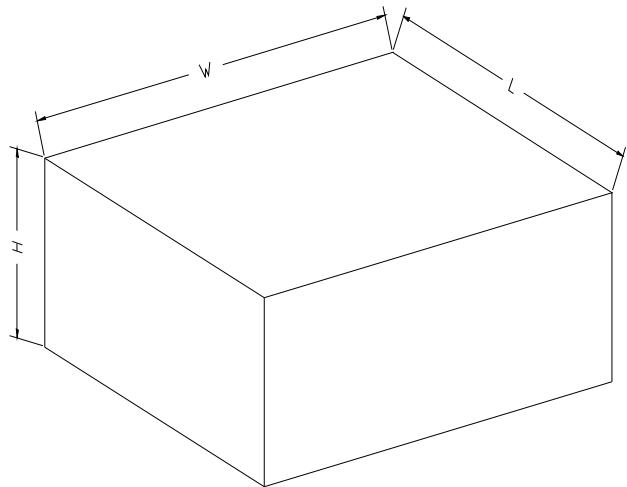CARTON BOX DIMENSIONS

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368 | 227 | 224 | 8 |
| 7" | 442 | 410 | 224 | 18 |
| 13" | 386 | 280 | 370 | 5 |