

Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number :

7447779133




Bezeichnung : **SPEICHERDROSSEL WE-PD**

description : **POWER-CHOKE WE-PD**

DATUM / DATE : 2008-01-04

A Mechanische Abmessungen / dimensions :

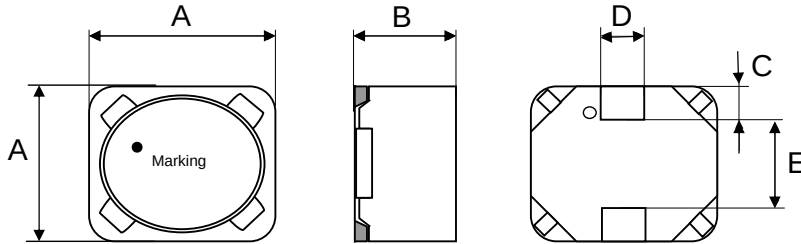

● = Start of winding


Marking = Inductance code

	Typ M	
A	7,3 ± 0,3	mm
B	4,5 max	mm
C	1,5 ± 0,2	mm
D	1,5 ± 0,3	mm
E	4,0 ± 0,3	mm

B Elektrische Eigenschaften / electrical properties :

Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	tol.
Induktivität / inductance	1 kHz / 0,25V	L	33,0	μH	±20%
DC-Widerstand / DC-resistance	@ 20°C	R _{DC typ}	0,140	Ω	typ.
DC-Widerstand / DC-resistance	@ 20°C	R _{DC max}	0,170	Ω	max.
Nennstrom / rated current	ΔT= 40 K	I _{DC}	1,13	A	max.
Sättigungsstrom / saturation current	ΔL/L < 10%	I _{sat}	1,40	A	typ.
Eigenres.-Frequenz / self-res.-frequency		SRF	12,0	MHz	typ.

C Lötpad / soldering spec. :

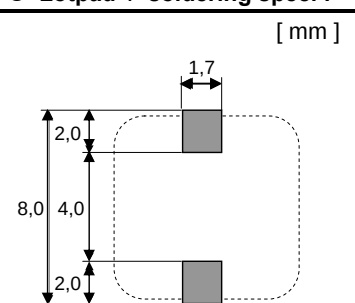

D Prüfgeräte / test equipment :

HP 4274 A für/for L und/and Q

HP 34401 A für/for I_{DC} und/and R_{DC}

E Testbedingungen / test conditions :

Luftfeuchtigkeit / humidity: 33%
Umgebungstemperatur / temperature: +20°C

F Werkstoffe & Zulassungen / material & approvals :

Basismaterial / base material: Ferrit/ferrite
Endoberfläche / finishing electrode: 100% Sn
Anbindung an Elektrode / soldering wire to plating: Sn/Ag/Cu - 96.5/3.0/0.5%
Draht / wire: 2SFBW; 155°

G Eigenschaften / general specifications :

Betriebstemp. / operating temperature: -40°C - + 125°C
Umgebungstemp. / ambient temperature: -40°C - + 85°C
It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.

Freigabe erteilt / general release:

Kunde / customer

MST	Version 10	08-01-04
MST	Version 8	04-10-11
SST	Version 7	04-07-28
SST	Version 6	04-04-21
SST	Version 5	04-04-15
MST	Version 4	03-12-10
AG	Version 3	02-11-05
AG	Version 2	02-05-14
Name	Änderung / modification	Datum / date

Datum / date

Unterschrift / signature

Würth Elektronik

Geprüft / checked

Kontrolliert / approved

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Straße 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
http://www.we-online.com


Spezifikation für Freigabe / specification for release

Kunde / customer : _____
 Artikelnummer / part number : **7447779133**
 Bezeichnung : **SPEICHERDROSSEL WE-PD**
 description : **POWER-CHOKE WE-PD**



DATUM / DATE : 2008-01-04

H Induktivitätskurve / Inductance curve :

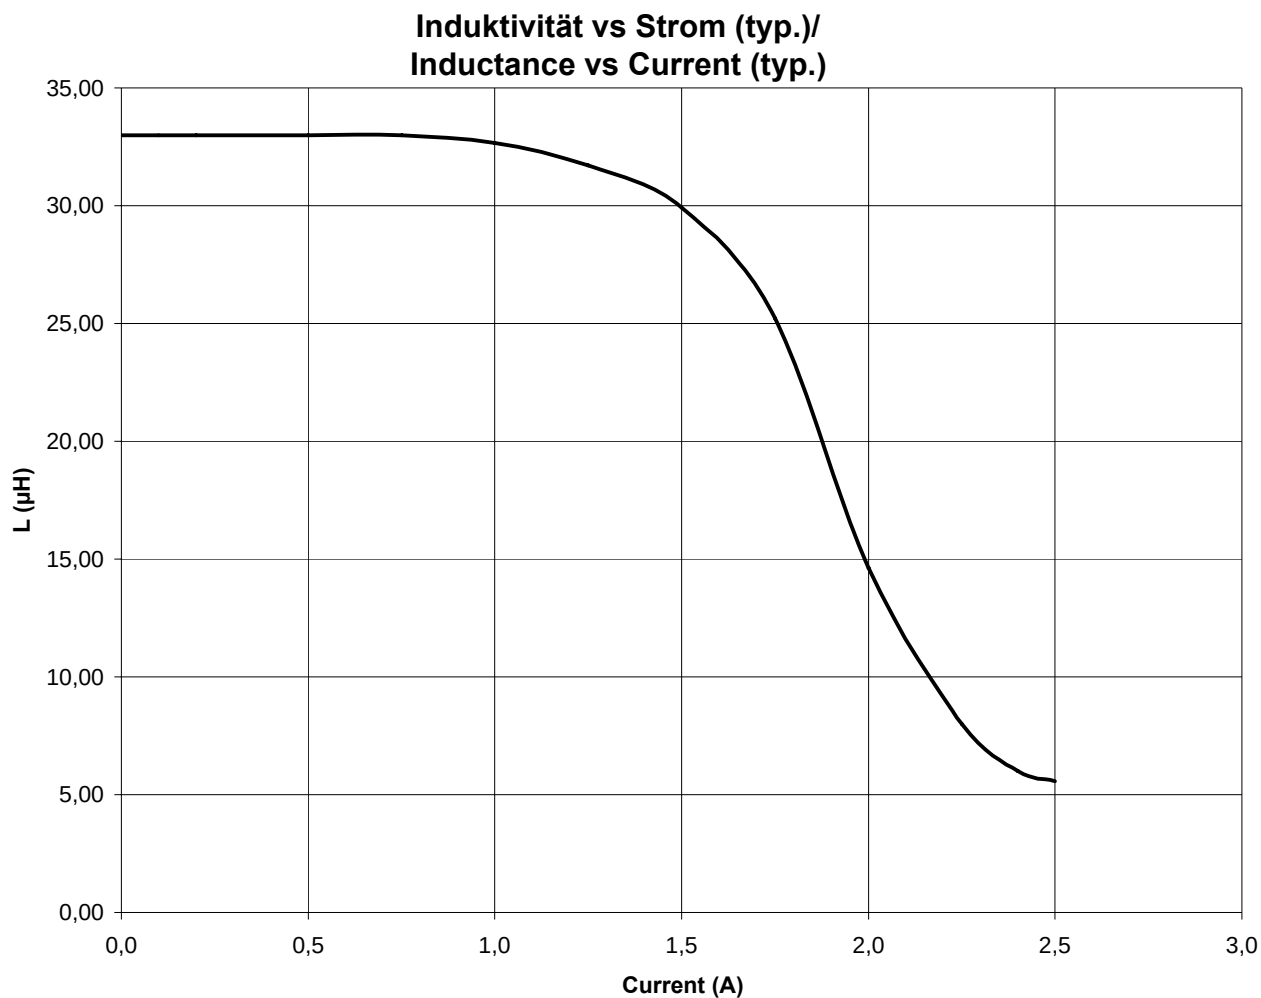

Freigabe erteilt / general release:	Kunde / customer	MST	Version 10	08-01-04
		MST	Version 8	04-10-11
		SST	Version 7	04-07-28
Datum / date	Unterschrift / signature	SST	Version 6	04-04-21
		SST	Version 5	04-04-15
		MST	Version 4	03-12-10
Geprüft / checked	Würth Elektronik	AG	Version 3	02-11-05
		AG	Version 2	02-05-14
		Name	Änderung / modification	Datum / date

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Straße 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400
<http://www.we-online.com>

Spezifikation für Freigabe / specification for release

Kunde / customer :

Artikelnummer / part number :

7447779133




Bezeichnung : **SPEICHERDROSSEL WE-PD**


description : **POWER-CHOKE WE-PD**

DATUM / DATE : 2008-01-04


I Rollenspezifikation / tape and reel specification :

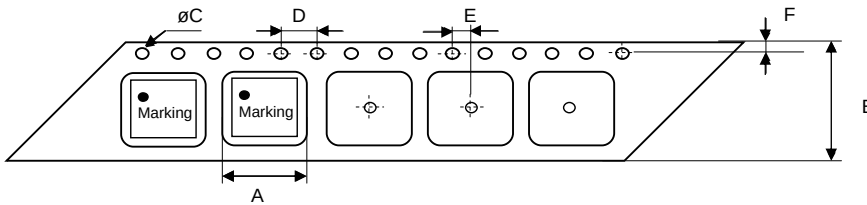

Gurtspezifikation / Tape specification:		
A	$10,0 \pm 0,1$	mm
B	$16,0 \pm 0,2$	mm
C	$1,50^{+0,1}_{-0,0}$	mm
D	$4,00 \pm 0,1$	mm
E	$2,00 \pm 0,1$	mm
F	$1,75 \pm 0,1$	mm
G	$10,0 \pm 0,1$	mm
H	$5,00 \pm 0,1$	mm

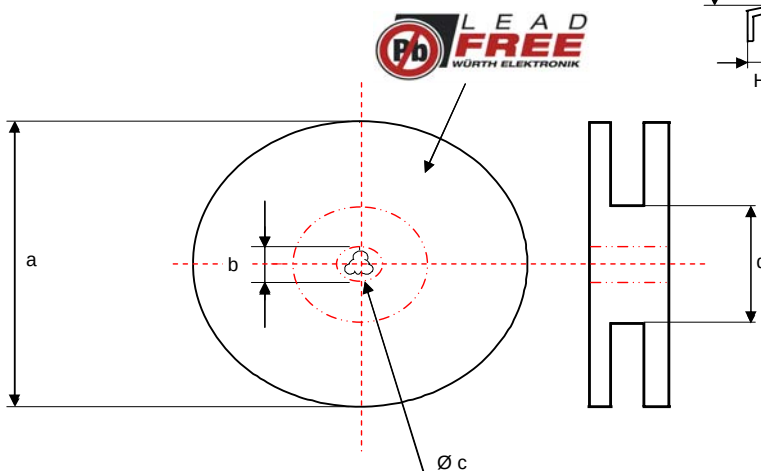

Rollenspezifikation / Reel specification:		
a	$330,0 \pm 2,0$	mm
b	$21,00 \pm 0,8$	mm
c	$13,00 \pm 0,5$	mm
d	$100,0 \pm 1,0$	mm

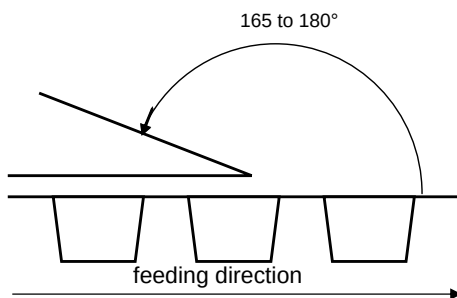

The force for tearing off cover tape is
10 to 130 grams in arrow direction

Freigabe erteilt / general release:

Kunde / customer

MST	Version 10	08-01-04
MST	Version 8	04-10-11
SST	Version 7	04-07-28
SST	Version 6	04-04-21
SST	Version 5	04-04-15
MST	Version 4	03-12-10
AG	Version 3	02-11-05
AG	Version 2	02-05-14
Name	Änderung / modification	Datum / date

Datum / date

Unterschrift / signature

Würth Elektronik

Geprüft / checked

Kontrolliert / approved

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Straße 1 · 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400

<http://www.we-online.com>