




# R1200F THRU R2000F


## HIGH VOLTAGE FAST RECOVERY RECTIFIER

Reverse Voltage - 1200 to 2000 Volts    Forward Current - 0.5/0.2 Ampere

**DO-41**

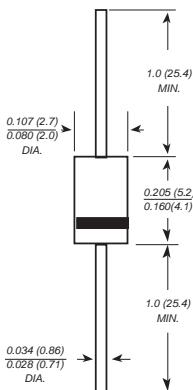

**DO-15**

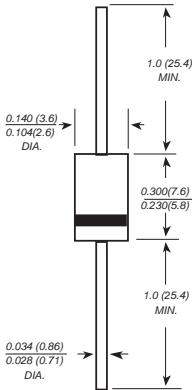

Dimensions in inches and (millimeters)

### FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-41/DO-15 molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.012 ounce, 0.33 grams(DO-41)

0.014 ounce, 0.40 grams(DO-15)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	R1200F	R1500F	R1800F	R2000F	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	1200	1500	1800	2000	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	840	1050	1260	1400	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	1200	1500	1800	2000	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig.1)	I <sub>(AV)</sub>		0.5		0.2	Amp
Peak forward surge current						
8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>		30.0			Amps
Maximum instantaneous forward voltage at 0.5/0.2 A	V <sub>F</sub>		2.5	4.0		Volts
Maximum DC reverse current    TA=25°C at rated DC blocking voltage    TA=100°C	I <sub>R</sub>		5.0	50.0		uA
Maximum reverse recovery time (NOTE 1)	t <sub>rr</sub>		500			ns
Typical junction capacitance (NOTE 2)	C <sub>J</sub>		15.0			pF
Typical thermal resistance (NOTE 3)	R <sub>qJA</sub>		50.0			°C/W
Operating junction and storage temperature range	T <sub>J,TSTG</sub>		-65 to +150			°C


**Note:** 1. Reverse recovery condition I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

# RATINGS AND CHARACTERISTIC CURVES R1200F THRU R2000F


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

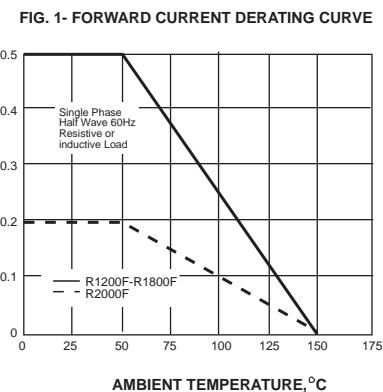


**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

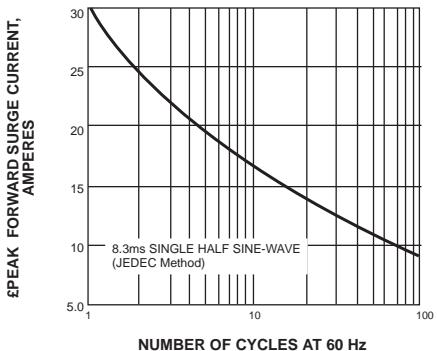


INSTANTANEOUS FORWARD  
CURRENT AMPERES

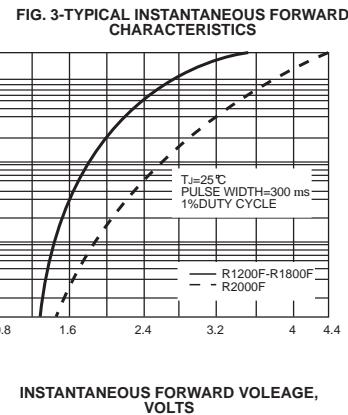

INSTANTANEOUS REVERSE CURRENT,  
MICROAMPERES

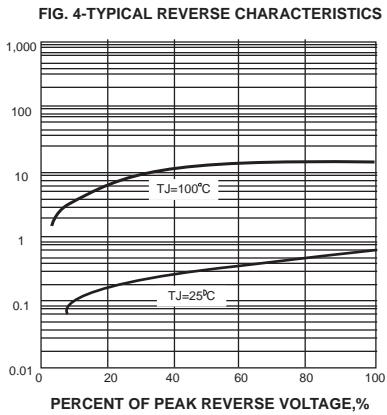

JUNCTION CAPACITANCE, pF

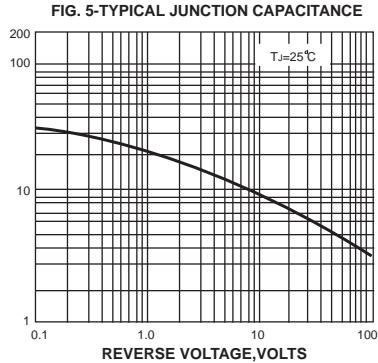

TRANSIENT THERMAL IMPEDANCE,  
°C/W

