
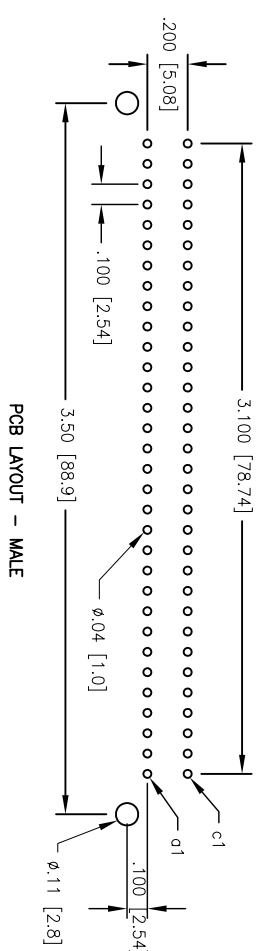


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/24/06	
A		REVISED DIMENSION	5/30/06	

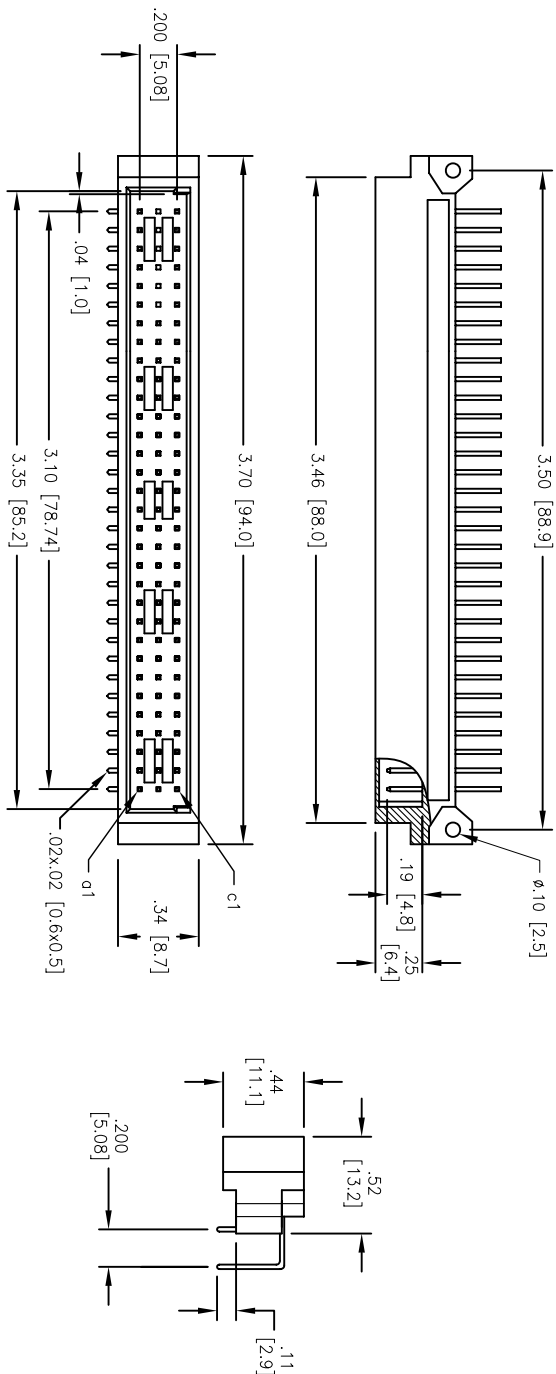

"X"	PLATING
C1	30 u" Gold
C2	15 u" Gold
C3	Gold Flash

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Beige
 Contacts: Brass
 Plating: X Gold over Nickel on contact area, Tin over Copper underplate on tails

Electrical: Operating voltage: 5000 VAC max
 Current rating: 2 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating: Operating temperature: -55°C to +125°C

Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN 41612, 96 POSITION MALE R/A, ROW
 A & C LOADED, 64 PINS, PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED			
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	5/24/06	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	DIN-64MR-L32-A1CX	A	
REF:	SCALE: NTS	SHEET 1 OF 1	