


RECOMMENDED PCB LAYOUT




SPDT CIRCUIT

CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
			DN
DN	NONE	DN	
2-3	OPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X=\pm 0.4$
 $X.XX=\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4VA @20VAC or DC
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/GOLD PLATE over
NICKEL PLATE.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C

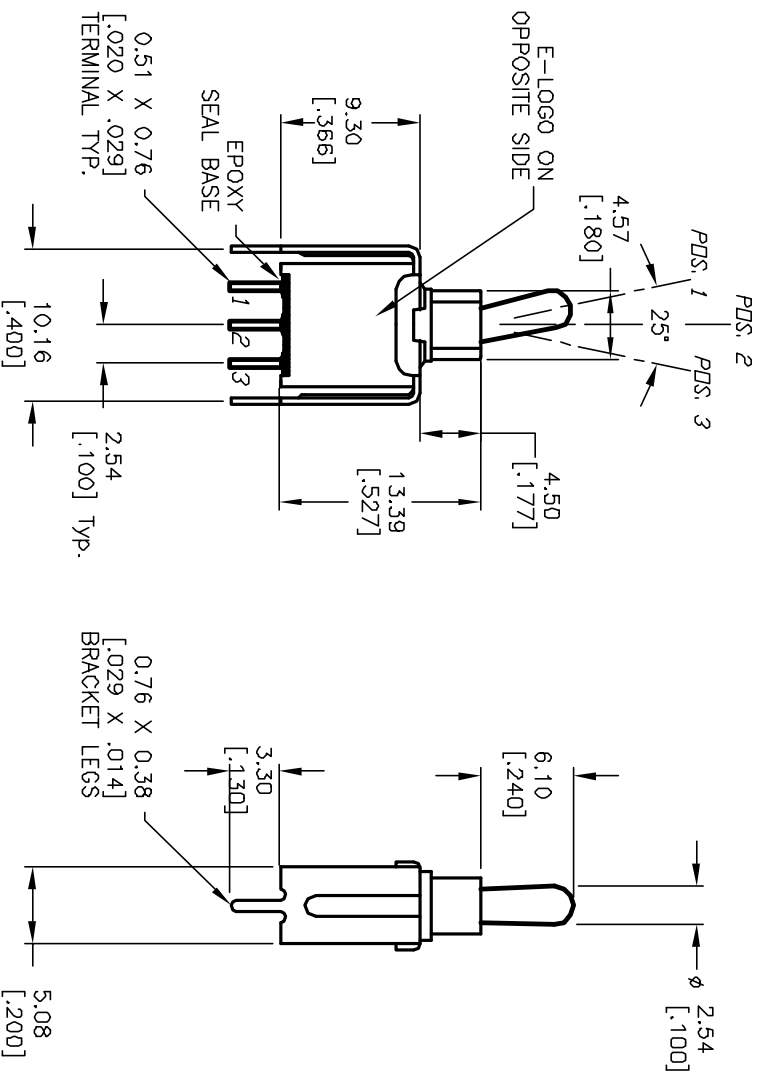

				8. DIELECTRIC STRENGTH: 1,000 V RMS @sed level.			
				9. OPERATING TEMP.: -30°C to +85°C			
A	12052	RELEASED FOR PRODUCTION	4/10/02	CB			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
E-SWITCH®							
TITLE 200A W/MSP-1 T2 A1 VS2 R E (GOLD CONTACTS)							
SCALE 2:1		DATE 4/10/02		DR CB		DWG T201207	
						REV A	