


RECOMMENDED PCB LAYOUT






CIRCUIT: SPDT  
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	<DN>
2-3	OPEN	2-1

< > = Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4VA @20 VAC or DC max.
5. FIXED TERM. & MOVING CONTACT:  
Copper ALLOY W/GOLD plate over  
Nickel plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles  
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C

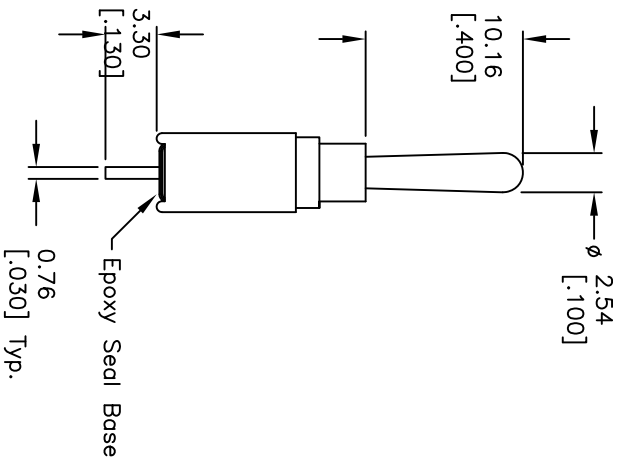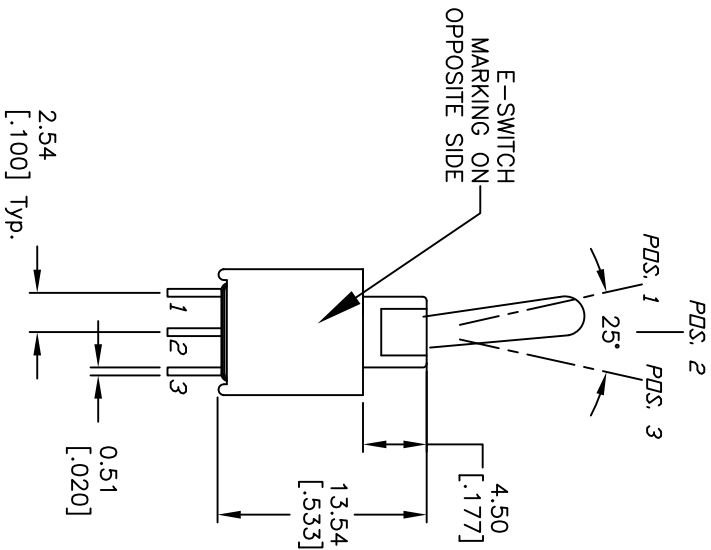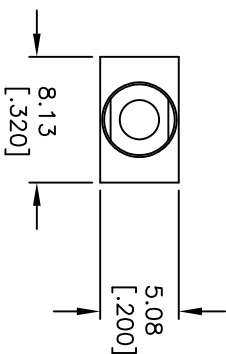

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	21002	13.54 WAS 13.39	2/4/13	EBP
B	12735	REVISED DESCRIPTION	1/15/03	CB
A	12641	RELEASED FOR PRODUCTION	1/8/03	CB

TITLE		SCALE	DATE	DR	DWG	REV
200AWMSP2T1A1M2RE		2:1	--	--	T201209	C

