


Three Terminal Low Current Negative Voltage Regulators

LM79L05A3

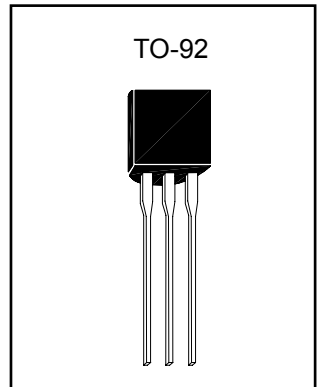

Description

The LM79L05A3 is an inexpensive, easy-to-use device suitable for numerous applications requiring up to 100mA. Like the higher powered LM7900E3 series negative regulators, this device features thermal shutdown and current limiting, making it remarkably rugged. In most applications, no external components are required for operation.


The LM79L05A3 device is useful for on-card regulation or any other application where a regulated negative voltage at a modest current level is needed. This regulator offers substantial advantage over the common resistor/zener diode approach.

- No external components required
- Internal short circuit current limiting
- Internal thermal overload protection
- Low cost
- Complementary positive regulators offered (LM78L05A3)
- Available in either $\pm 3\%$ or $\pm 5\%$ selection.

Absolute Maximum Ratings (Ta=25°C)


- Input Voltage.....-30V
- Total Power Dissipation..... Internally limited
- Operating Temperature Range..... 0 °C to +125 °C
- Maximum Junction Temperature..... +150 °C
- Storage Temperature Range..... -65 °C to +150 °C
- Lead Temperature (Soldering 10S).....260 °C

Typical Application

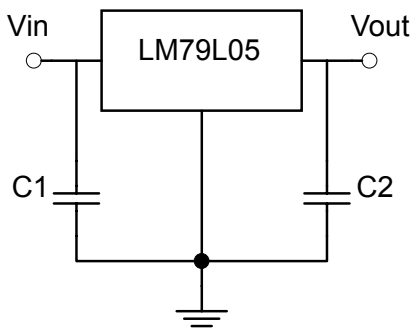

Note:
 C1 and C2 are required if regulator is located far from power supply filter and load, or oscillation may induced on the loop.

Representative Schematic Diagram

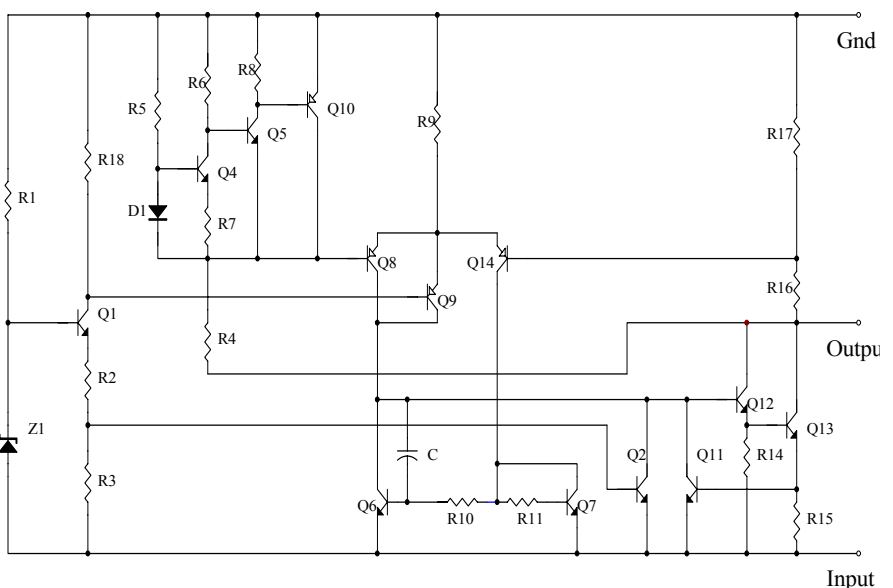



Ordering Information

Device	Output Voltage Tolerance
LM79L05A3 A-rank	±3%
LM79L05A3 B-rank	±5%

Electrical Characteristics

$V_{in}=-10V$, $I_{out}=40mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$ (unless otherwise noted)


Symbol	Parameter	Conditions	LM79L05A3 A-rank			Units
			Min	Typ	Max	
Vo	Output Voltage	$T_j=25^{\circ}C$	-4.85	-5.00	-5.15	V
		$1mA \leq I_o \leq 70mA$	-4.8	-	-5.2	
		$1mA \leq I_o \leq 40mA$ and $-7V \leq V_{in} \leq -20V$	-4.8	-	-5.2	
ΔV_o	Line Regulation	$T_j=25^{\circ}C$, $-7V \leq V_{in} \leq -20V$	-	-	150	mV
		$T_j=25^{\circ}C$, $-8V \leq V_{in} \leq -20V$	-	-	100	
ΔV_o	Load Regulation	$T_j=25^{\circ}C$, $1mA \leq I_o \leq 100mA$	-	-	60	mV
		$T_j=25^{\circ}C$, $1mA \leq I_o \leq 40mA$	-	-	30	
IQ	Quiescent Current	$T_j=25^{\circ}C$	-	-	6	mA
		$T_j=125^{\circ}C$	-	-	5.5	
ΔIQ	Quiescent Current Change	$1mA \leq I_o \leq 40mA$	-	-	0.1	mA
		$-8V \leq V_{in} \leq -20V$	-	-	1.5	
Vn	Output Noise Voltage	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100KHz$	-	40	-	μV
$\Delta V_{in} / \Delta V_{out}$	Ripple Rejection	$-8V \leq V_{in} \leq -18V$, $f=120Hz$	41	49	-	dB
VD	Dropout Voltage	$T_j=25^{\circ}C$, $I_{out}=40mA$	-	1.7	-	V

Symbol	Parameter	Conditions	LM79L05A3 B-rank			Units
			Min	Typ	Max	
Vo	Output Voltage	$T_j=25^{\circ}C$	-4.8	-5.00	-5.2	V
		$1mA \leq I_o \leq 70mA$	-4.75	-	-5.25	
		$1mA \leq I_o \leq 40mA$ and $-7V \leq V_{in} \leq -20V$	-4.75	-	-5.25	
ΔV_o	Line Regulation	$T_j=25^{\circ}C$, $-7V \leq V_{in} \leq -20V$	-	-	150	mV
		$T_j=25^{\circ}C$, $-8V \leq V_{in} \leq -20V$	-	-	100	
ΔV_o	Load Regulation	$T_j=25^{\circ}C$, $1mA \leq I_o \leq 100mA$	-	-	60	mV
		$T_j=25^{\circ}C$, $1mA \leq I_o \leq 40mA$	-	-	30	
IQ	Quiescent Current	$T_j=25^{\circ}C$	-	-	6	mA
		$T_j=125^{\circ}C$	-	-	5.5	
ΔIQ	Quiescent Current Change	$1mA \leq I_o \leq 40mA$	-	-	0.1	mA
		$-8V \leq V_{in} \leq -20V$	-	-	1.5	
Vn	Output Noise Voltage	$T_a=25^{\circ}C$, $10Hz \leq f \leq 100KHz$	-	40	-	μV
$\Delta V_{in} / \Delta V_{out}$	Ripple Rejection	$-8V \leq V_{in} \leq -18V$, $f=120Hz$	41	49	-	dB
VD	Dropout Voltage	$T_j=25^{\circ}C$, $I_{out}=40mA$	-	1.7	-	V

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

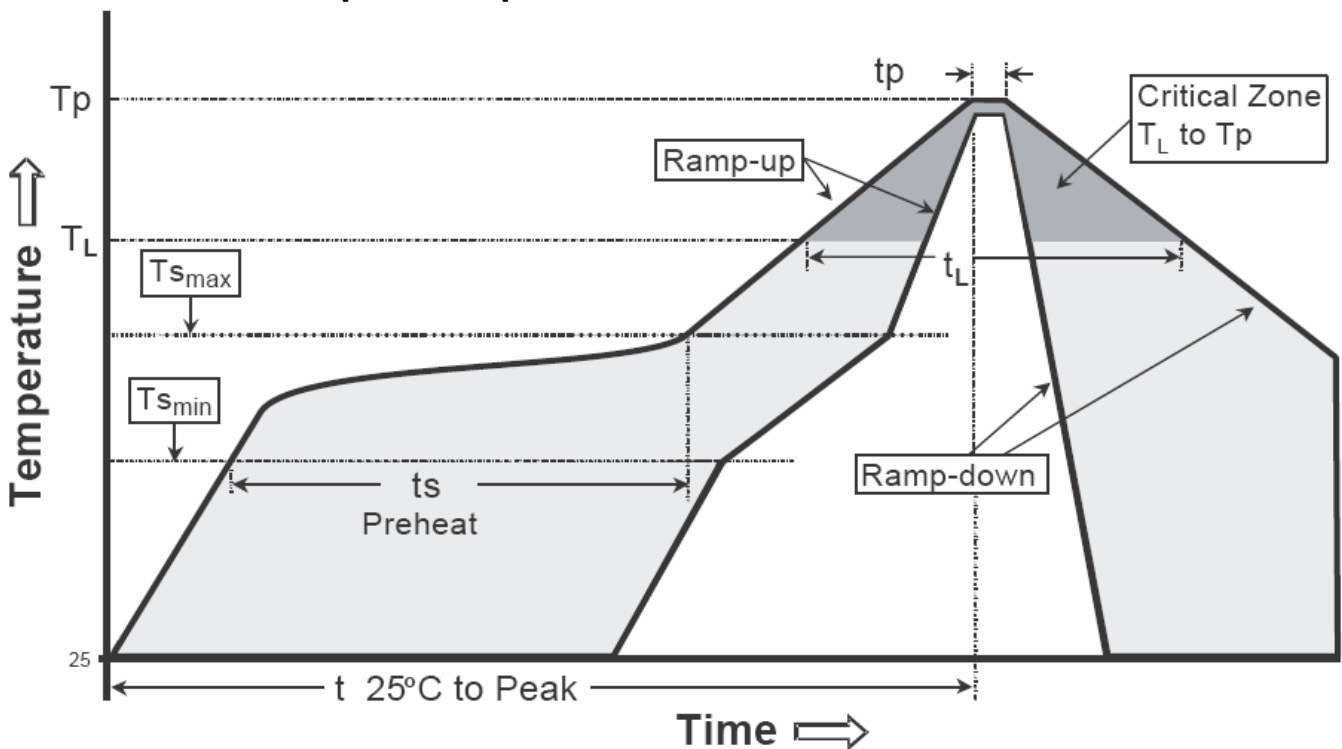

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(Ts min)	100°C	150°C
-Temperature Max(Ts max)	150°C	200°C
-Time(ts min to ts max)	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (TL)	183°C	217°C
- Time (tL)	60-150 seconds	60-150 seconds
Peak Temperature(TP)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

TO-92 Dimension

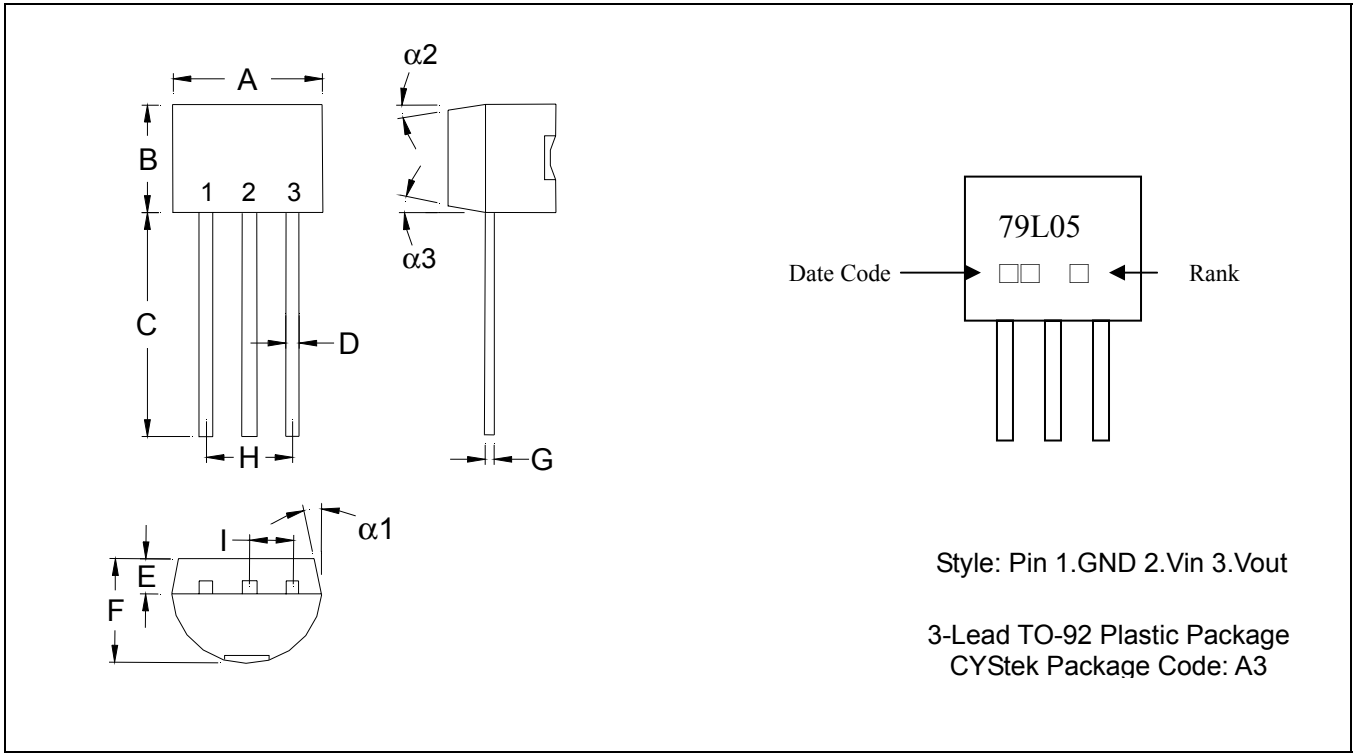

*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1704	0.1902	4.33	4.83	G	0.0142	0.0220	0.36	0.56
B	0.1704	0.1902	4.33	4.83	H	-	*0.1000	-	*2.54
C	0.5000	-	12.70	-	I	-	*0.0500	-	*1.27
D	0.0142	0.0220	0.36	0.56	$\alpha 1$	-	*5°	-	*5°
E	-	*0.0500	-	*1.27	$\alpha 2$	-	*2°	-	*2°
F	0.1323	0.1480	3.36	3.76	$\alpha 3$	-	*2°	-	*2°

Notes: 1.Controlling dimension: millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.