


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/23/09	

APPROVED: _____
 DATE: _____ TITLE: _____

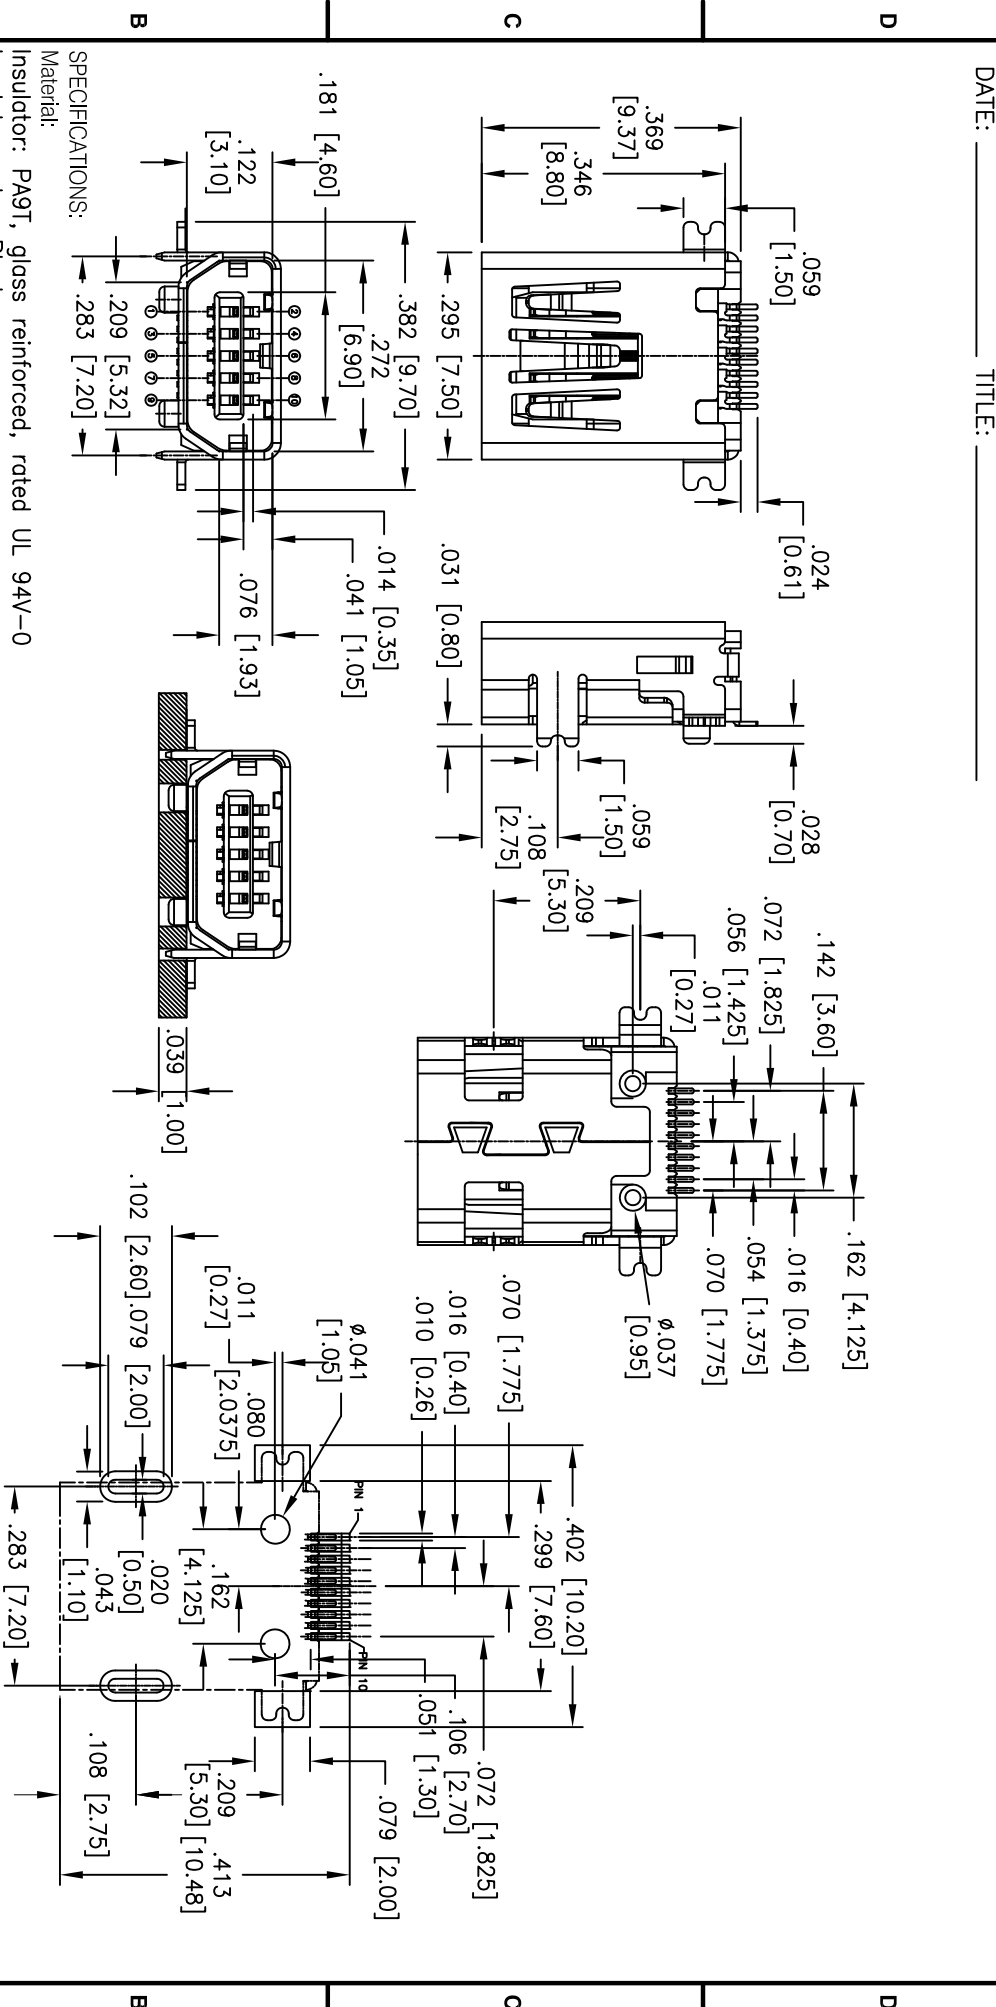

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
 Material: Insulator: PA9T, glass reinforced, rated UL 94V-0
 Contacts: Phosphor Bronze
 Shell: Stainless Steel, Tin over Nickel plated
 Plating: Gold Flash over Nickel underplate overall
Electrical:
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 1000 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN MM
 TOLERANCES: EXCEPT AS NOTED
 INCHES

X	± .10	ØXX	± .015
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

APPROVALS

DRAWN	DY	DATE
CHECKED		10/23/09
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI USB, 10P, FEMALE, SINGLE PORT
 RIGHT ANGLE, SMT TYPE

SIZE	PART NO.	REV.
X	MUSB-10P-S-RA-SMT	-

REF: S00015C SCALE: NTS SHEET 1 OF 1