

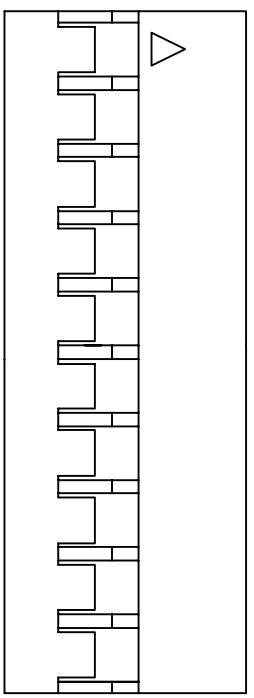


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: _____
 DATE: _____ TITLE: _____

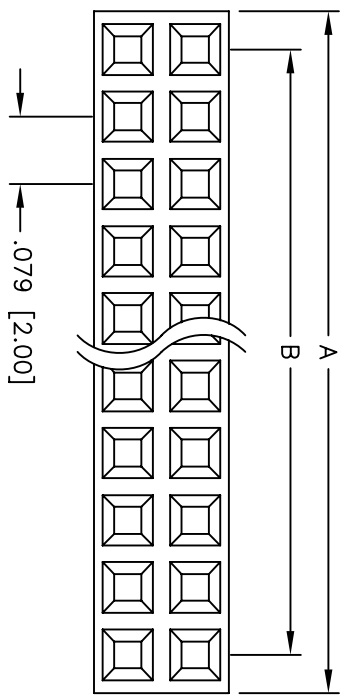

Positions: 4 thru 80
 A = .079 [2.00] x No. of Spaces + .090 [2.30]
 B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:
Material:
 Insulator: Nylon 66, Rated UL94V-0
 Insulator color: Black
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -65°C to +105°C
Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		2.0mm CRIMP CONTACT HOUSING	
SIZE	PART NO.	REV.	
X	2MTF-XX	-	
REF:	SCALE: NTS	SHEET 1 OF 1	