

# C0402X5R1A682M020BC

TDK Item Description : C0402X5R1A682MT\*\*\*\*



## Application & Main Feature

Commercial Grade ( General (Up to 50V) )

## Series

C0402 [EIA CC01005]



## Dimensions

L 0.40mm +/-0.02mm  
 W 0.20mm +/-0.02mm  
 T 0.20mm +/-0.02mm  
 B 0.07mm Min.  
 G 0.14mm Min.

## Temperature Characteristic

X5R (-55 to 85 degC +/-15%)

## Rated Voltage

1A (10Vdc)

## Capacitance

6.8nF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

10% Max.


## Insulation Resistance

10Gohm Min.


## AEC-Q200

Not Applicable


## DC Bias Characteristic

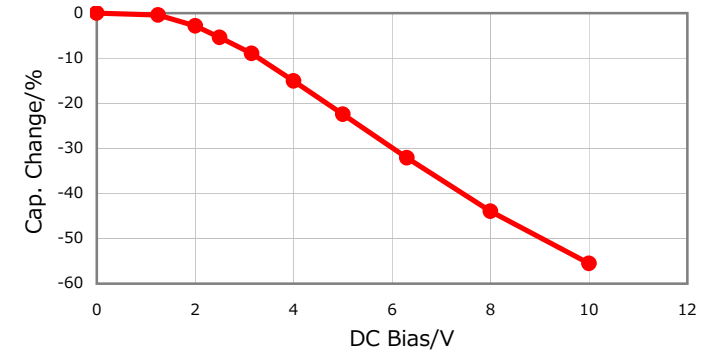


## |Z|, ESR vs. Freq. Characteristics

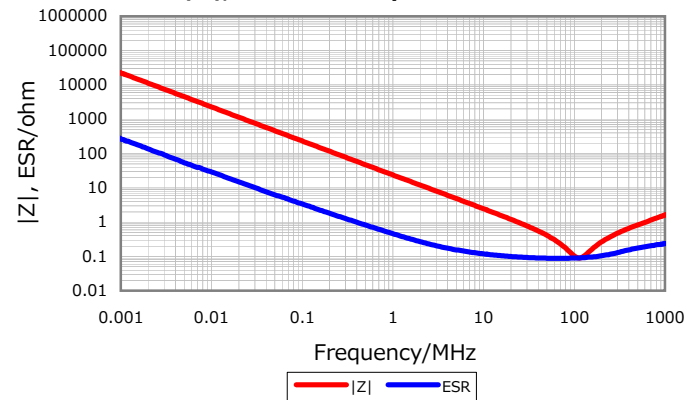


## Temperature Characteristic

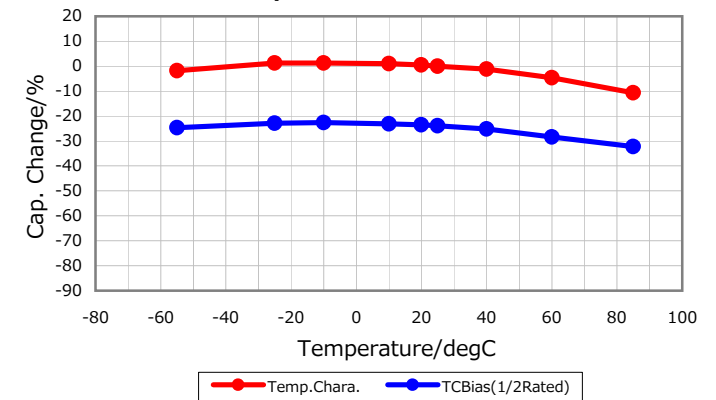

## Cap. vs. Freq. Characteristic

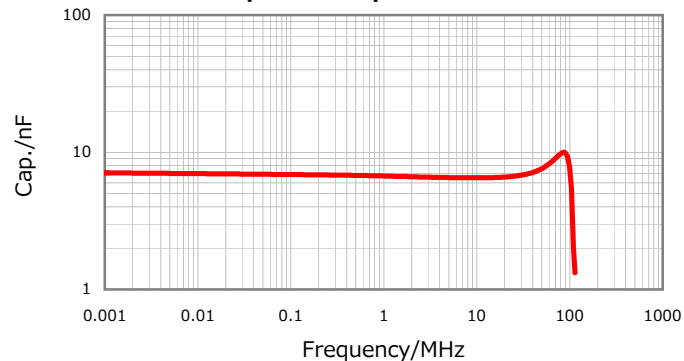

## Ripple Temperature Rise Characteristic

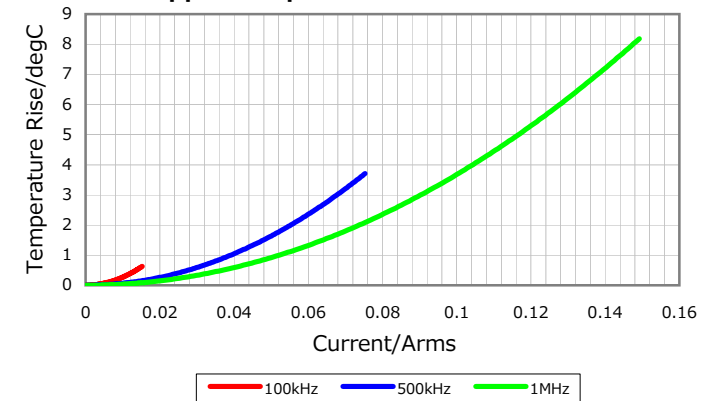

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

September 27, 2013