
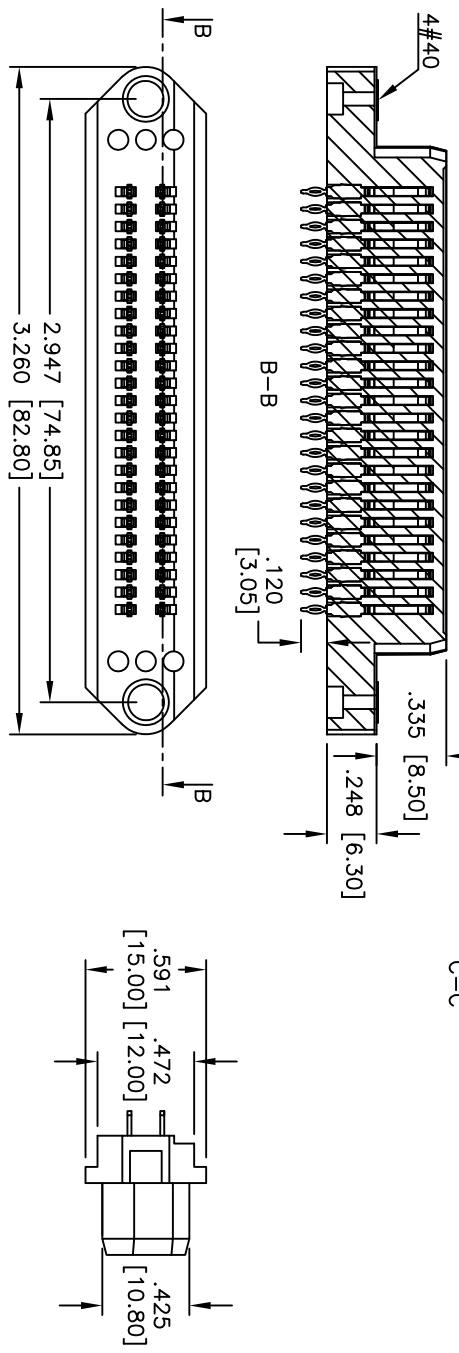


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/09	

APPROVED: _____
 DATE: _____ TITLE: _____

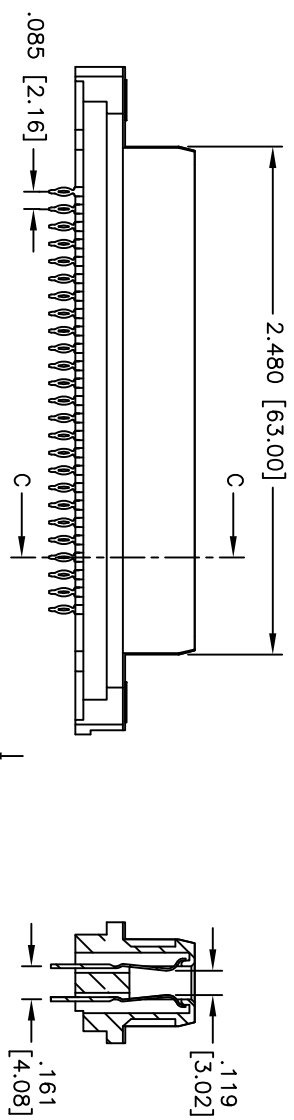

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Blue
 Contacts: Phosphor Bronze
 Shell: Steel, Nickel plated
 Hood: Steel
 Plating: 30u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical: Current rating: 5 Amp max
 Contact resistance: 25 mohms max
 Insulation resistance: 1000 Mohms min @ 500V
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C



Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINIATURE RIBBON PLUG, CENTRONIC PCB STRAIGHT
 #440 THREADED HOLES, PRESS FIT PIN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS:	DATE:	DATE:	
DRAWN: DY	10/20/09	TITLE: #440 THREADED HOLES, PRESS FIT PIN	
CHECKED:		SIZE: X	PART NO.: MR50-SB-34+PF-30
APPROVED:		REF: S00033T	SCALE: NTS