




TOP VIEW

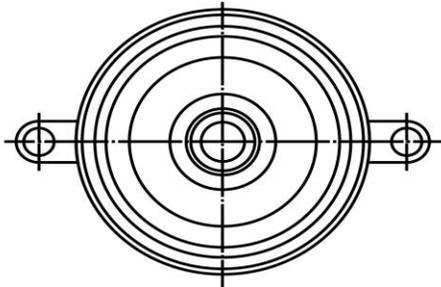

SIDE VIEW



BOTTOM VIEW

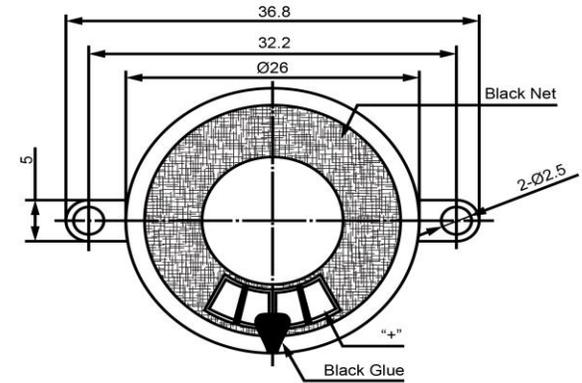

Specifications		
Description	Value	Unit
Shape	Round	
Resonant Frequency	660	(Hz)
Frequency Range	660 ~ 5,000	(Hz)
SPL @ 10cm	94	(dBA)
Impedance	8	(Ohm)
Cone Material	Mylar	
Nominal Power	0.5	(W)
Max Power	0.6	(W)
Mount Type	Flange Mount	
Operating Temperature	-30 ~ +60	°C
Storage Temperature	-30 ~ +70	°C
Weight	5.5	(g)

Notes
1) All dimensions are in mm unless otherwise noted
2) All parts meet RoHS



Revision History					
Version	Description	Date	Approved		
1	Released from Engineering	2/5/2014	J.S.		
Drawn by	Date	Checked by	Date	Approved by	Date
G.W.	1/27/2014	C.E.	2/4/2014	J.S.	2/5/2014

Dynamic Speaker

SM260608-1