

Powerex General Purpose Rectifier Diodes are designed with high locking voltage capability and low forward voltage drop to minimize conduction losses. These are packaged in hermetic, ceramic Pow-R-Disc packages which can be mounted using commercially available clamps and heatsinks or fully assembled to a variety of air or water cooled heat exchangers.

FEATURES:

- Low On-State Voltage
- Hermetic Ceramic Package
- Excellent Surge and I^2t Ratings

APPLICATIONS:

- DC Power Supplies
- Input Rectifiers
- Plating Supplies

ORDERING INFORMATION

Select the complete 12 digit Part Number using the table below.
 EXAMPLE: RDS81210XXOO is a 1200V 10,000A General Purpose Diode with a typical reverse recovery time of 25 μ s.

PART	Voltage Rating $V_{DRM}-V_{RRM}$	Voltage Code	Current Rating I_{tavg}	Current Code	Reverse Recovery t_{RR}	Lead Code
RDS8	1200V	12	10000A	10	XX	OO
	1000V	10				
	800V	08			25 μ s typical	
	600V	06				

Revised:

8/6/2012

Absolute Maximum Ratings

Characteristic	Symbol	Rating	Units
Repetitive Peak Reverse Voltage	V_{RRM}	1200	Volts
Average On-State Current, $T_C=90^\circ\text{C}$	$I_{F(Avg.)}$	10000	A
RMS On-State Current, $T_C=90^\circ\text{C}$	$I_{F(RMS)}$	15708	A
Peak One Cycle Surge Current, 60Hz, $V_R=V_{RRM}$	I_{FSM}	120,000	A
Fuse Coordination I^2t , 60Hz	I^2t	6.00E+07	A ² s
Peak One Cycle Surge Current, 50Hz, $V_R=0V$	I_{FSM}	111,000	A
Fuse Coordination I^2t , 50Hz	I^2t	6.16E+07	A ² s
Operating Temperature	T_j	-40 to+175	°C
Storage Temperature	$T_{Stg.}$	-50 to+200	°C
Approximate Weight		6.5	lb
		2.95	Kg
Mounting Force		16,000 - 20,000	lbs
		71.2 - 89.0	Knewtons

Information presented is based upon manufacturers testing and projected capabilities. This information is subject to change without notice. The manufacturer makes no claim as to suitability for use, reliability, capability or future availability of this product.


Electrical Characteristics, T_j=25°C unless otherwise specified

Characteristic	Symbol	Test Conditions	Rating			Units
			min	typ	max	
Repetitive Peak Reverse Leakage Current	I _{RRM}	T _j =175°C, V _{RRM} =Rated		150	300	ma
Peak On-State Voltage	V _{FM}	T _j =175°C, I _{FM} =4000A			0.75	V
V _{FM} Model, Low Level	V ₀	T _j =175°C			0.642	V
V _{FM} = V ₀ + r•I _{FM}	r	15% I _{FM} - π•I _{FM}			2.28E-05	Ω
V _{FM} Model, High Level	V ₀	T _j =175°C			0.911	V
V _{FM} = V ₀ + r•I _{FM}	r	π•I _{FM} - I _{FSM}			1.20E-05	Ω
V _{FM} Model, 4-Term	A	T _j =175°C			0.410	
V _{FM} = A + B•Ln(I _{FM}) +	B	15% I _{FM} - I _{FSM}			0.011	
C•(I _{FM}) + D•(I _{FM}) ^{1/2}	C				4.00E-06	
	D				0.00358	
Reverse Recovery Time	t _{RR}	T _j =25°C, I _{FM} =400A di _R /dt = 25 A/μs		25		μs


Thermal Characteristics

Characteristic	Symbol	Test Conditions	Rating			Units	
			min	typ	max		
Thermal Resistance							
Junction to Case	R _{Θ_{jc}}	Double side cooled		0.007	0.0075	°C/Watt	
Case to Sink	R _{Θ_{cs}}	Double side cooled		0.001	0.0015	°C/Watt	
Thermal Impedance Model	Z _{Θ_{jc}}	Double side cooled					
Z _{Θ_{jc}} (t) = Σ(A(N)•(1-exp(-t/Tau(N))))		where:	N =	1	2	3	4
			A(N) =	1.426E-04	9.077E-04	2.373E-03	4.080E-03
			Tau(N) =	2.622E-03	2.313E-02	3.049E-01	3.600E+00


Maximum On-State Voltage Drop

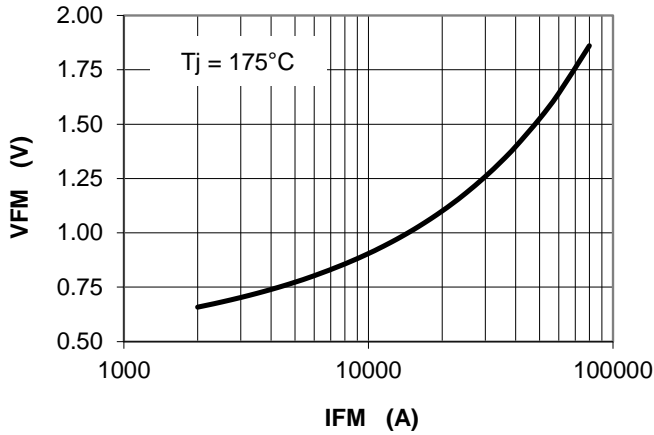


MAXIMUM TRANSIENT THERMAL IMPEDANCE

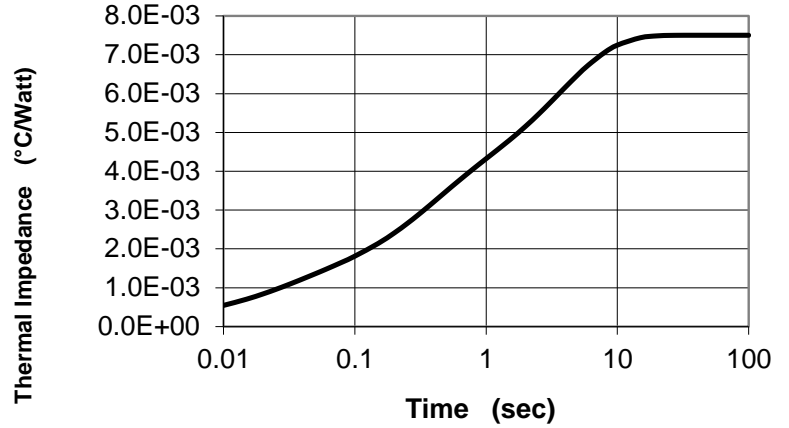


Maximum On-State Power Dissipation

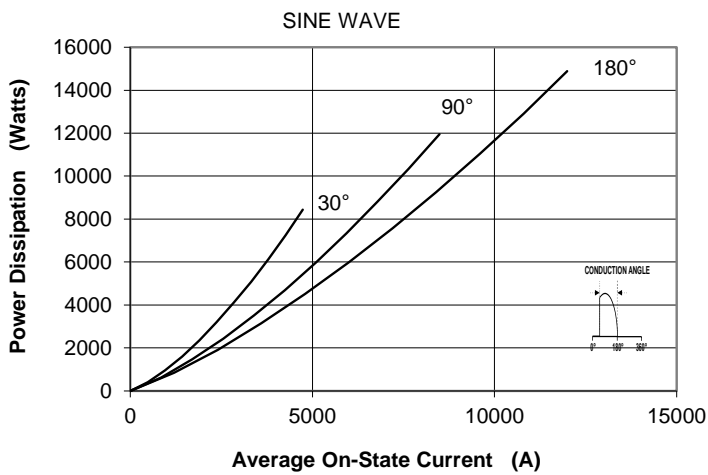

Maximum Allowable Case Temperature

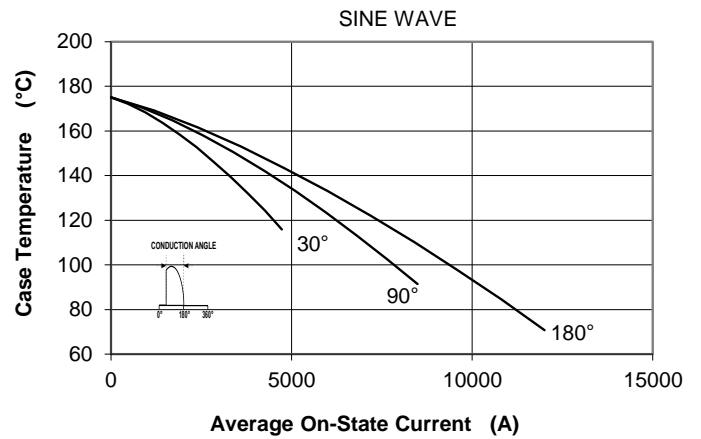

Maximum On-State Power Dissipation

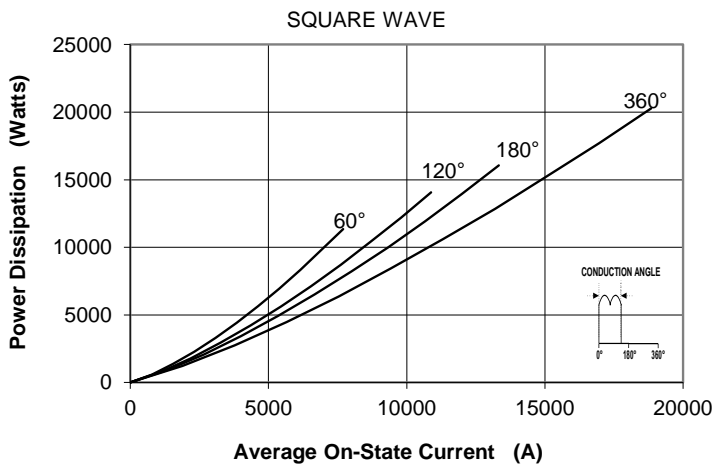

Maximum Allowable Case Temperature

