


REVERSE ANGLE SMD CHIP LED 3216(1206)

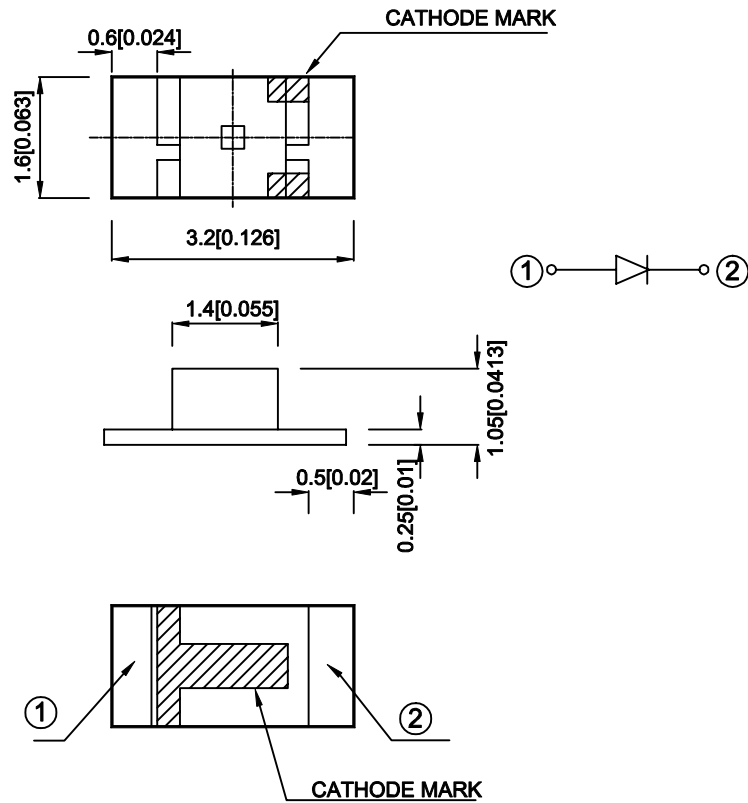

UNIT : MM(INCH)  
TOLERANCE :  $\pm 0.2[\pm 0.0079]$  UNLESS OTHERWISE NOTED

**Selection Guide**

Part No.	Dice	Lens Type	Iv (mcd) @20mA		Viewing Angle
			Min.	Typ.	2θ 1/2
APTR3216NW	PURE ORANGE (GaAsP/GaP)	WHITE DIFFUSED	5	12	120°
APTR3216QYW	SUPER BRIGHT GREEN (GaP)	WHITE DIFFUSED	3	12	120°
APTR3216QGW	SUPER BRIGHT GREEN (GaP)	WHITE DIFFUSED	3	12	120°
APTR3216PGW	PURE GREEN (GaP)	WHITE DIFFUSED	2	5	120°
APTR3216PYW	PURE YELLOW (GaAsP/GaP)	WHITE DIFFUSED	3	8	120°
APTR3216SRWPRV	SUPER BRIGHT RED (GaAlAs)	WHITE DIFFUSED	40	70	120°
APTR3216MBW	BLUE (GaN)	WHITE DIFFUSED	2	8	120°

APPROVED:

J. Chuang

CHECKED:

J. Chao

DRAWN :

L.N. Sheu

SCALE :

10 : 1

DATA NO. : F2689

DATE : DEC/23/1999