

FEATURES

- N+1 or N+R Parallel Redundancy for power guarantee
- Modular design decreases MTTR
- High scalability
- Built-in maintenance bypass switch for easy maintenance without interruptible
- High efficiency double conversion online UPS
- Adjustable battery numbers
- Adjustable charging current
- Graphic 5.7" LCD design for easy configuration

PHASE (ONLY FOR ONLINE UPS)

Phase: 3-phase in / 3-phase out

INPUT


Capacity: 210 KW
Voltage: 3 x 400 VAC (3Ph+N)
Voltage Range: 305-478 VAC (3-phase) @ 100% load
 190-520 VAC (3-phase) @ 50% load
Frequency Range: 40Hz ~ 70 Hz

OUTPUT

AC Voltage Regulation (Batt. Mode): ±5 %
Frequency Range (Batt. Mode): 46~54Hz or 56~64Hz
Waveform (Batt. Mode): Pure Sine Wave

BATTERY

Battery Type: NONE
Battery Number: NONE
Typical Recharge Time: NONE

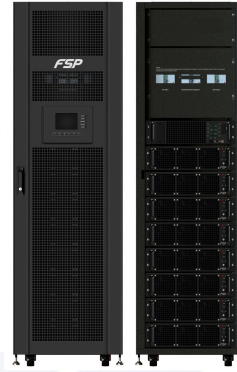

SAFETY STANDARD APPROVAL



PROTECTION

Full Protection: Full Protection

PHYSICAL

Output Receptacles: India, French, Schuko, NEMA, and IEC selections
Dimension: 600mm(L) x 1100mm(W) x 2030mm(H)
Net Weight (kgs): NONE

OPERATING ENVIRONMENT

Humidity: 0-90 % RH @ 0- 40°C (non-condensing)
Noise Level: NONE

MANAGEMENT

Optional USB/RS-232 Port: Support Windows 98/2000/2003/XP/Vista/2008, Windows 7, Linux, and MAC 8

This content is subject to change, please refer to specification for more detail.
 FSP reserve the right to change the content without prior notice