



Bestückungsplan / contact layout

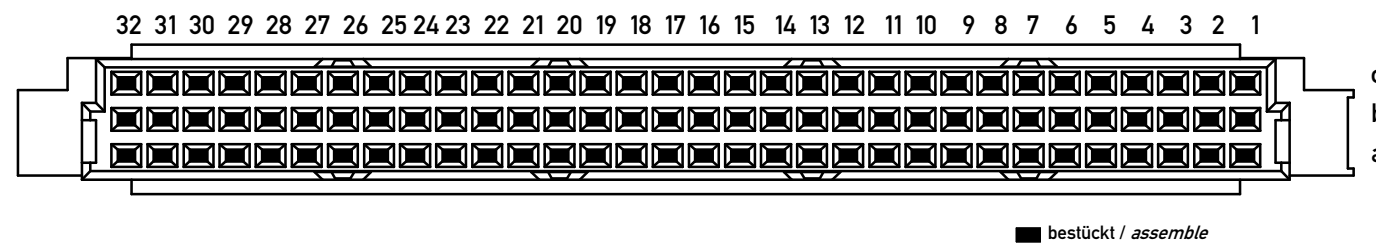

Elastische Einpresszone / compliant pressfit zone  
 Isolierwerkstoff / housing material : PBT GF 30  
 Bauart 7 / type 7  
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles  
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2  
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2  
 Schichtaufbau im metallisierten Loch siehe Zeichnung 114124  
 diameter of drilled hole see drawing 114124

- 1)  $\phi 1.0^{+0.09}_{-0.06}$  Durchmesser des metallisierten Loches
- $\phi 1.0^{+0.09}_{-0.06}$  Diameter of finished plated-through hole

Leiterplatten-Lochbild / PCB drillhole pattern

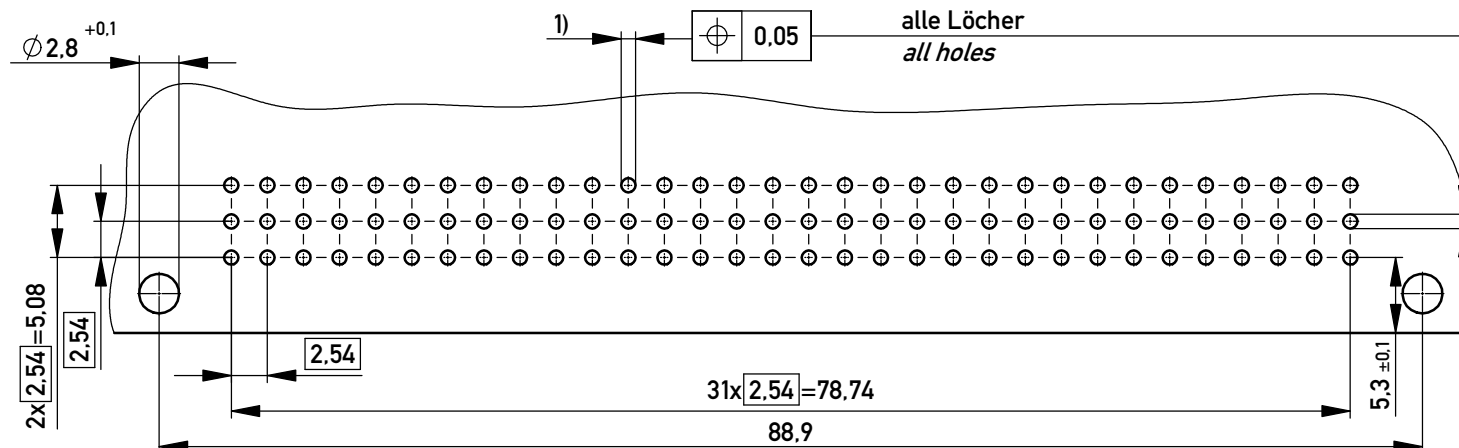

Information: <b>Im Tray verpackt / tray packaging</b>  All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances  All Dimensions in mm	Scale	2:1
		Designation <b>Federleiste R 96 EE</b> <b>Fem. Connector R 96 pressfit</b>	
b Index	18.01.2012 Date	www.ERNI.com	<b>100201070001</b> K A3
		Class	STVR

Copyright by ERNI GmbH  
Proprietary notice pursuant to ISO 16016 to be observed.