

### DESCRIPTION

FSP400-70PFB(24V) is an industrial level of switching power supply. The power supply comes to offer the total power capacity up to 400 Watts, and uses unique active PFC (Power Factor Correction) circuit design with its high-load electrical components, makes it to be perfectly used in an industrial environment. In addition, with its full range of input and output electrical features, the power supply is ideally the best choice for server, workstation, communication or any other automation applications to use. The product also complies with the latest safety and EMC standards, which is perfectly to meet various regulations worldwide.



### APPLICATION

For standard, advanced server, communication and industrial power system.

### FEATURES

- ▣ Low Ripple & Noise
- ▣ Output over voltage protection
- ▣ Short circuit protection on all outputs
- ▣ Resettable power shut down
- ▣ 100% burn-in under high ambient temperature(50°C)
- ▣ Vacuum-impregnated transformer
- ▣ MTBF:100K hours at 25°C
- ▣ 100% Hi-pot tested
- ▣ Line input fuse protection

### WATTAGE

**Wattage:** 400W

### DIMENSION

**Dimension:** 140mm(L) x 150mm(W) x 86mm(H)

### PRODUCT HIGHLIGHT

**Efficiency Level:** NON-80PLUS  
**Altitude:** N/A  
**PMBus:** For standard, advanced server, communication and industrial power system.

### INPUT SPECIFICATION

**Input Range:** 90-264 Vac  
**Input Frequency:** 47-63 Hz  
**Input Current:** 115V@ 6.0 Amps-rms maximum  
 230V@ 3.0 Amps-rms maximum

### GENERAL SPECIFICATION

**Voltage Regulation:** +3.3V, +12V, +5V, +5SB, +24V: ±5%  
 -12V, -5V: ±10%

### SAFETY STANDARD APPROVAL



### OUTPUT SPECIFICATION

**Hold up Time:** 115V/60Hz 18mSec.  
 Minimum@100% Load,  
 230V/50Hz 18mSec.  
 Minimum,@100% Load  
**Output Voltage Regulation:** +3.3Vdc output : +3.5 Vdc minimum, + 4.5Vdc maximum  
 +5Vdc output : +5.5 Vdc minimum, + 6.82Vdc maximum  
 +5Vsb output : +5.5 Vdc minimum, + 7.5Vdc maximum  
 +12Vdc output : +13.4 Vdc minimum, + 15.6Vdc maximum  
 +24Vsb output : +26.4 Vdc minimum, + 29Vdc maximum  
**Output Rise Time:** 115V-rms/230V-rms 5V 20ms Maximum  
 115V-rms/230V-rms 12V 20ms Maximum  
**Ripple & Noise:** 3.3V:50mV p-p  
 5V:50mV p-p  
 12V1:120mV p-p  
 -12V:120mV p-p  
 5Vsb:50mV p-p  
 -5V:100mV p-p  
 24V:240mV p-p

### ENVIRONMENTAL SPECIFICATION

**TEMP.Range:** Storage Temperature: -20°C to + 80°C  
**MTBF:** The power supply have a minimum predicted MTBF(MIL-HDBK-217) of 100,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC input voltage


### \*Output Voltage and Current Rating

	+3.3V	+5V	+12V1	-12V	+24V	-5V	+5Vsb
<b>Ripple-Noise(R-P) mV</b>	50mV	50mV	120mV	120mV	240mV	100mV	50mV
<b>Regulation Load %</b>	±5%	±5%	±5%	±10%	±5%	±10%	±5%
<b>Output Max.(A)</b>	10A	18A	16A	0.5A	5A	0.3A	2A
<b>Output Min.(A)</b>	0.5A	0.5A	1A	0A	0.3A	0A	0A

### NOTES

- ▣ 5V, 3.3V, 12V, -12V Will gave the regulation to 10% when all load take off.
- ▣ The +3.3V, +5V and +12V1 and 24V total output shall not exceed 385 watts.
- ▣ The +3.3V and +5V total output shall not exceed 110 watts.
- ▣ The total output shall not exceed 400 watts

### MECHANICAL SPECIFICATION

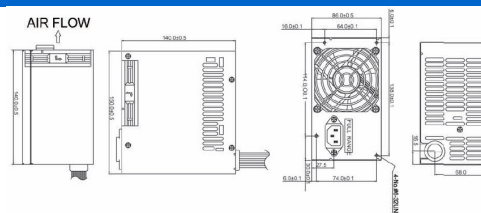

This content is subject to change, please refer to specification for more detail. FSP reserve the right to change the content without prior notice.