



Stecklänge / mating length




E = early mate, late break / voreilend  
 S = standard  
 L = late mate, early break / nacheilend

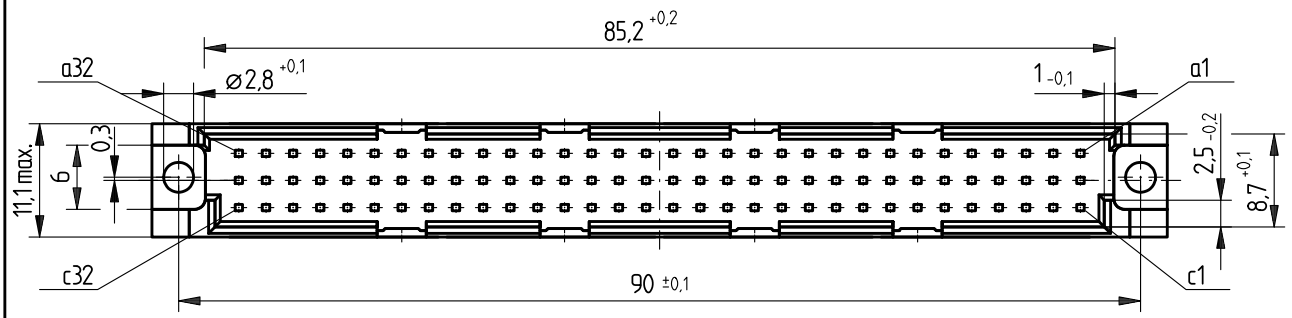

Elastische Einpresszone mit Übergabesteckzone /  
 compliant pressfit zone with mating transfer zone  
 Isolierwerkstoff / housing material : PBT GF30  
 Bauart 4 / type 4


Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles  
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2  
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2  
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 6  
 diameter of drilled hole see drawing 164062 / No. 6

Bestückungsplan / contact layout

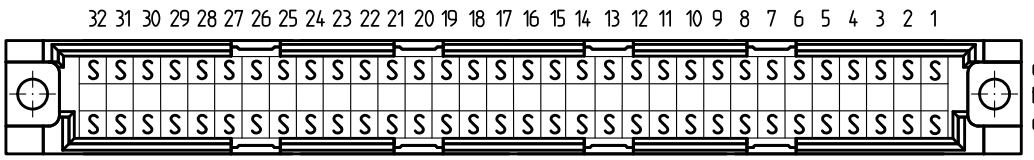

- 1)  $\phi 1,0 \pm 0,09$  Durchmesser des metallisierten Loches  
 $\phi 1,0 \pm 0,09$  Diameter of finished plated-through hole

Leiterplatten-Lochbild / PCB drillhole pattern

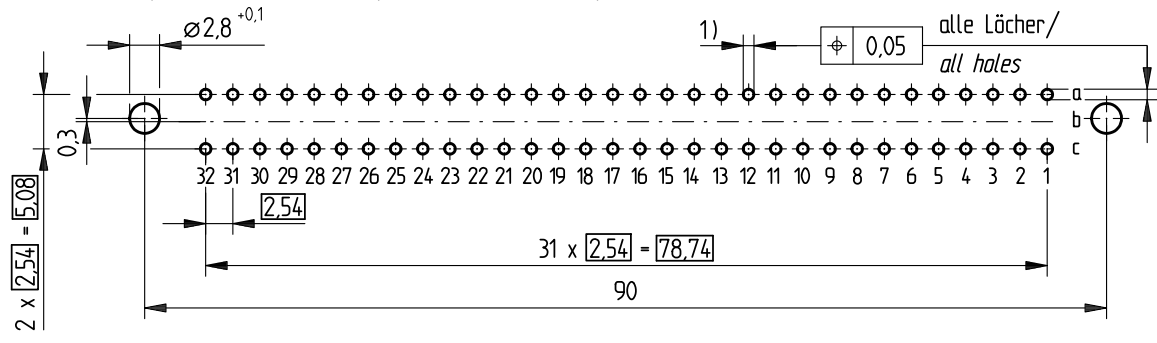

Bedruckung siehe Zeichnung 294905  
 Marking see drawing 294905

Information:  All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances All Dimensions in mm	Scale 2:1	
	Subject to modification without prior notice. Drawing will not be updated.	Designation <b>Messerleiste R 64 EE</b> <b>Male Connector R 64 Pressfit</b>	
www.ERNI.com	354381		
Index	Date	H:00065457.SZA	STVR

Consider protection memo from DIN 34