

BPC-9208-H

8.4" Panel PC with Touch Screen, V4 Eden, 2 COM, 4 USB, 12V DC Adapter

Panel PC



Features

- » Aluminum front panel design
- » 8.4" TFT color panel display w/touch screen
- » VIA V4 Eden processor
- » VGA, dual Ethernet, Audio port
- » 1 x 2.5" HDD space
- » 1 x CF socket
- » 2 x COM port, 4 x USB2.0 port
- » 12V DC Adapter
- » 1 x 4cm ball bearing cooling fan
- » Option for Wireless LAN module
- » Option for open frame type

System

LCD

Size: 8.4"
Max. Resolution: 800 x 600 pixels
Brightness: 250 cd/m²
Contrast Ratio: 600:1
Max. Color: 26.2K colors
Pixel Pitch: 0.213 x 0.213 mm

Touch Screen

8.4" resistive

SBC

HS-2622

CPU

VIA V4 Eden processor 1GHz

System Chipset

VIA CX700(M)

System Memory

1 x 200-pin SO-DIMM, DDR2 533MHz, Max. 1GB

Display Interface:

1 x D-SUB 15-pin

Audio Interface

Audio jack for MIC In, Line Out, Line In

Ethernet Interface

2 x RJ-45 for Ethernet
1 x USB wireless LAN module (option)

Storage

1 x 2.5" HDD space
1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from
1~255 sec. or 1~255 min.

H/W Status Monitor

Monitoring temperatures, voltages, and cooling fan status

Thermal System

1 x 4cm ball bearing cooling fan

Power

12V 84W DC adapter

Operating/Storage Temperature

0~50°C/-20~+70°C

Certification

FCC/CE Class A compliance
IP65 front panel protection compliance


Dimensions

27.0(L) x 21.0(H) x 8.7(W) cm


Cut Out Size

23.4(L) x 17.4(H) cm

I/O Interface

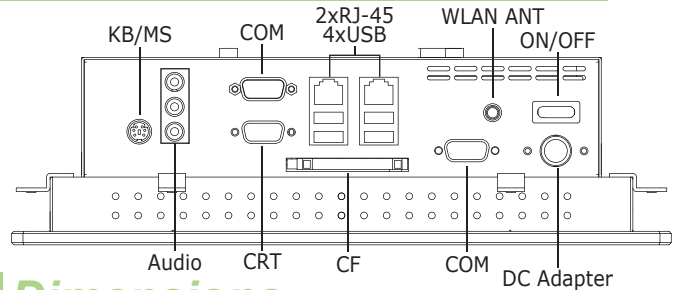

Dimensions (unit:cm)

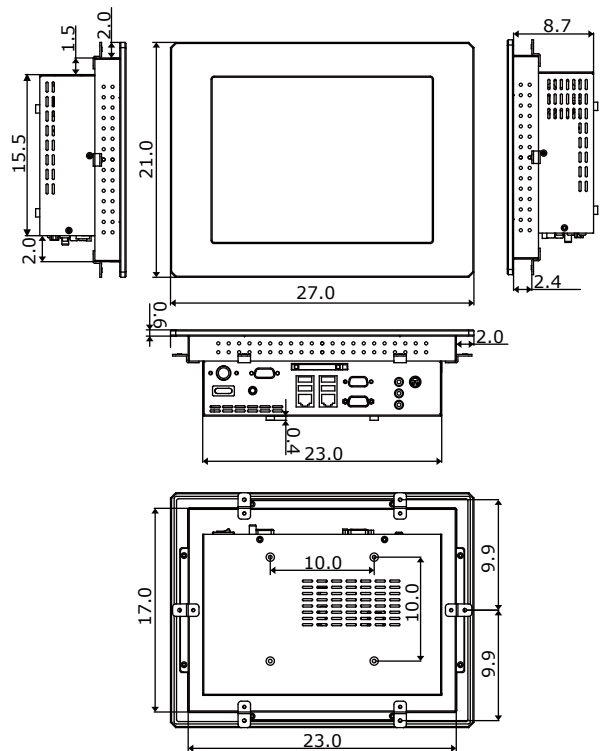

Ordering Information

BPC-9208-H

8.4" Panel PC w/Touch Screen, Eden 1GHz CPU,
2 COM, 4 USB, 12V DC Adapter

OPC-9208-H

8.4" Open Frame Panel PC w/Touch Screen, Eden
1GHz CPU, 2 COM, 4 USB, 12V DC Adapter

Accessory Options

Table Top Metal Stand, Memory Module, CF Module,
Wireless LAN Module, 2.5" SATA HDD