



RECOMMENDED P.C.B. LAYOUT  
SCALE: 2:1

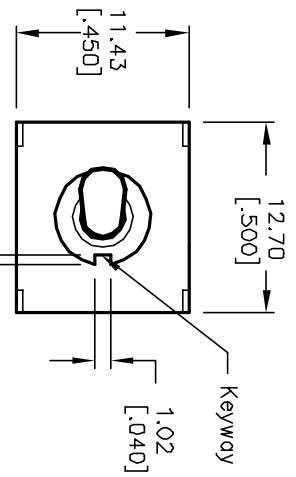



CIRCUIT: DPDT

SWITCH FUNCTION	POS. 1	POS. 2	POS. 3
DN	DN	DN	DN
DF	DF	DF	DF
OPN	OPN	OPN	OPN

NOTES:  
< >=Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC or DC max.
5. MATERIALS: FIXED TERM. & MOVING CONTACT:  
Copper Alloy W/Gold plate over  
Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break  
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C

E-SWITCH  
MARKING ON  
OPPOSITE SIDE

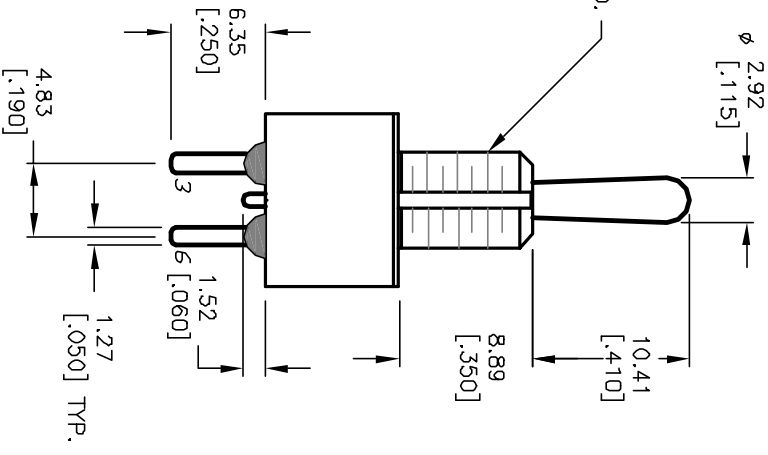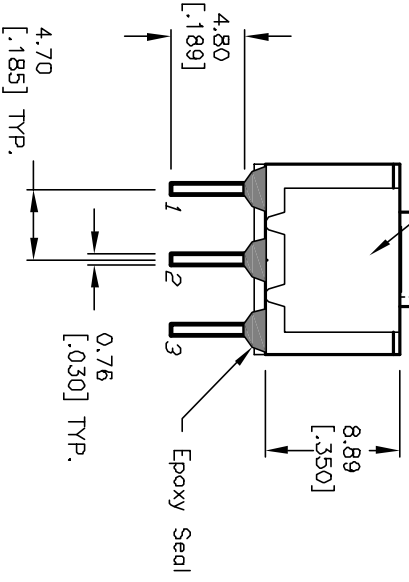

**E-SWITCH®**

TITLE: 100 DP-5 T1 B1 M2 R E (GOLD CONTACTS)

REV. B	ECN No. 12374	RELEASED	8/15/02	CJB
		DESCRIPTION	DATE	CHKD

SCALE	DATE	DR	DWG	REV
2:1	--	--	T125010	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED