

**FAST RECOVERY RECTIFIERS**

**VOLTAGE RANGE: 200 --- 800 V  
CURRENT: 5.0 A**


**FEATURES**

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon Alcohol, Isopropanol and similar solvents

**MECHANICAL DATA**

- ◇ Case: JEDEC TO-220AC, molded plastic
- ◇ Terminals: Solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.064 ounce, 1.96 grams

**TO-220AC**

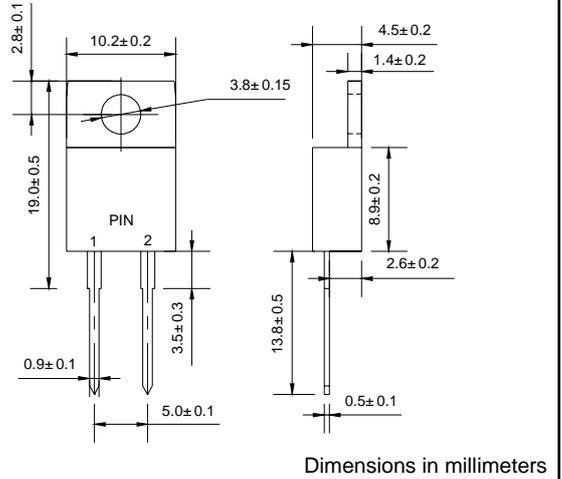

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.



Single phase, half wave, 50Hz, resistive or inductive load. For capacitive load, derate by 20%.

		ERC 20-02	ERC 20-04	ERC 20-06	ERC 20-08	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	200	400	600	800	V
Maximum RMS voltage	$V_{RMS}$	140	280	420	560	V
Maximum DC blocking voltage	$V_{DC}$	200	400	600	800	V
Maximum average forward rectified current @ $T_c=125^\circ C$	$I_{F(AV)}$	5.0				A
Peak forward surge current 10ms single half-sine-wave superimposed on rated load @ $T_j=125^\circ C$	$I_{FSM}$	70				A
Maximum instantaneous forward voltage @ 5.0 A	$V_F$	1.3		1.5		V
Maximum reverse current at rated DC blocking voltage	$I_R$	50				$\mu A$
Maximum reverse recovery time (Note1)	$t_{rr}$	400				ns
Typical thermal resistance (Note2)	$R_{\theta JC}$	3.0				$^\circ C/W$
Operating junction temperature range	$T_J$	-55 --- + 150				$^\circ C$
Storage temperature range	$T_{STG}$	-55 --- + 150				$^\circ C$

NOTE: 1. Measured with  $I_F=0.1A$ ,  $I_R=0.1A$ .

2. Thermal resistance from junction to case.


**FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

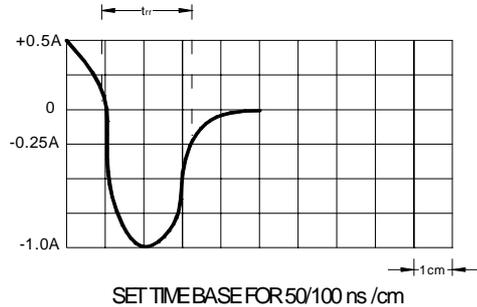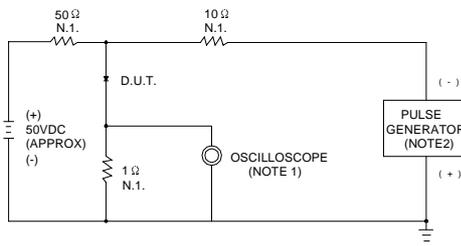


NOTES: 1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ. 22pF  
 2. RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

SET TIME BASE FOR 50/100 ns /cm


**FIG.2 – FORWARD DERATING CURVE**

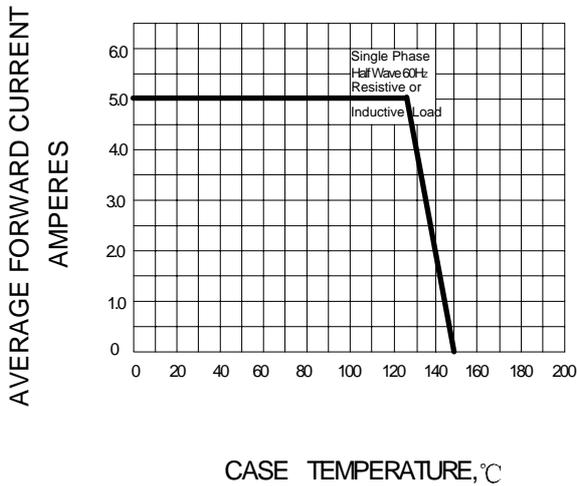

**FIG.3 – PEAK FORWARD SURGE CURRENT**

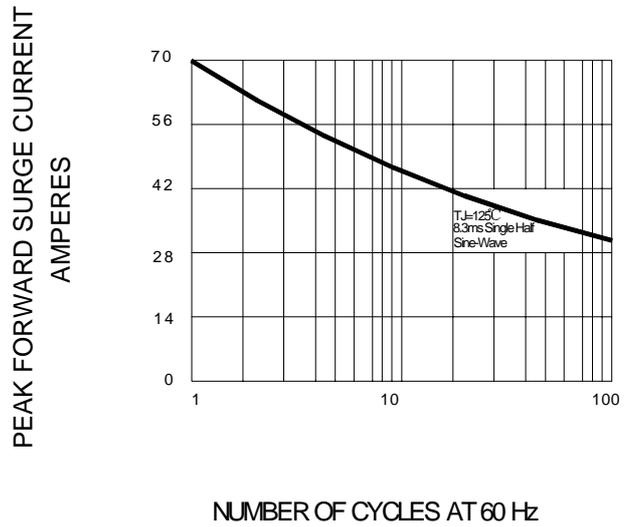

**FIG.4 – TYPICAL FORWARD CHARACTERISTIC**

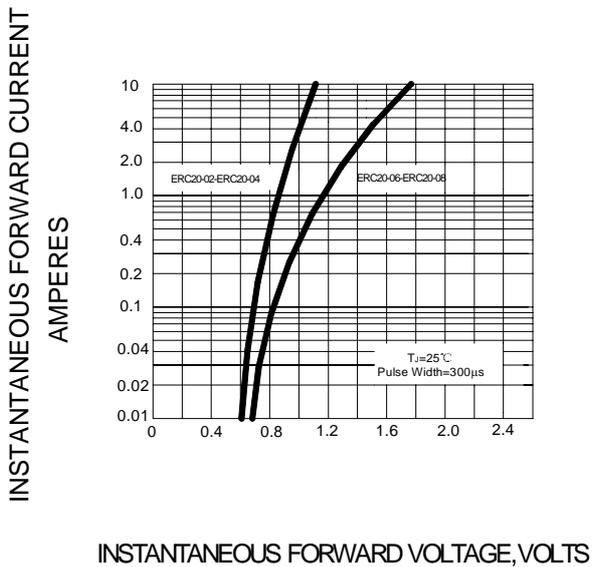

**FIG. 5 - TYPICAL REVERSE CHARACTERISTICS**

