



1. Mechanical Dimensions:

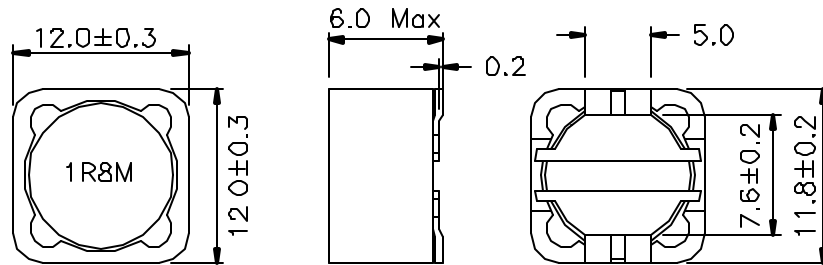

2. Schematic:



3. Electrical Specification:

OCL: 1.8uH±30% @100KHz, 0.1V
 OCL: 0.8uH±30% @100KHz, 0.1V, 25.2Adc
 DCR: 0.00224 Ohms Typ.
 Saturation Current: 25.2 Adc

DOC. REV: A/1

| | | | |
|-------------------|--|----------------------|-----------|
| XFMRs Inc. | Title: HIGH CURRENT SELF-LEADED SMT INDUCTORS | | |
| | UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 INCH Dimensions in INCH | P/N: XFTPRH1205-1R8M | REV. A |
| SHEET 1 OF 1 | DWN. | 李清儿 | Feb-26-99 |
| | CHK. | 孙怡 | Feb-26-99 |
| | APP. | Joe Huff | Feb-26-99 |