



1. Mechanical Dimensions:

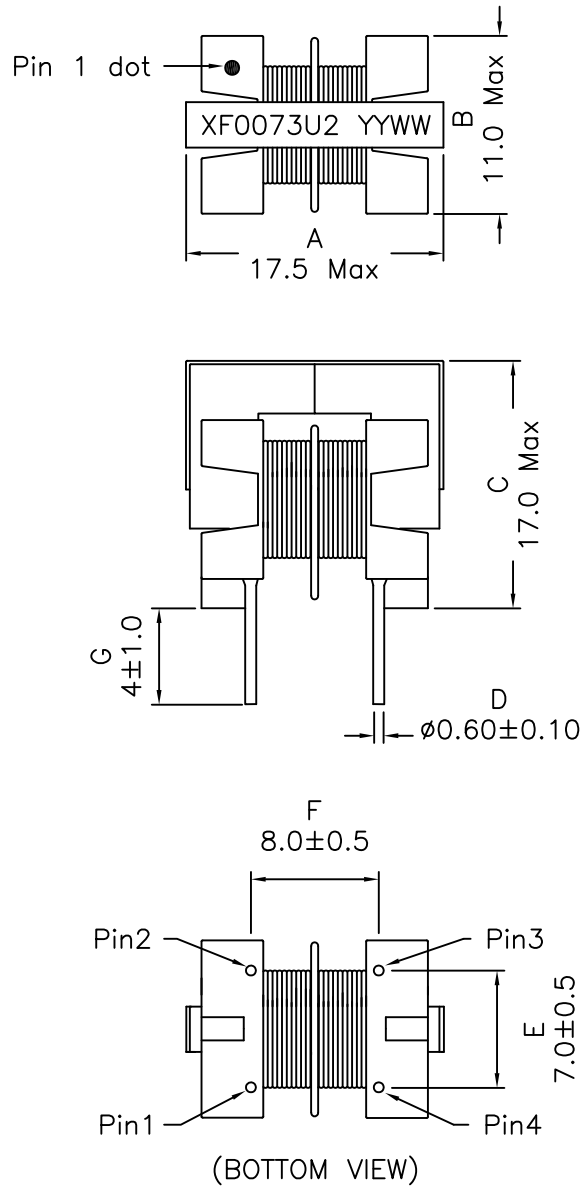

2. Schematic:

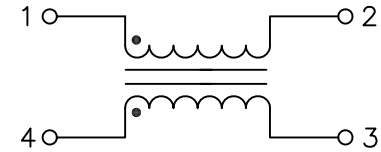

3. Electrical Specifications: @25°C

- TURN RATIO: (PIN1-2) : (PIN4-3) = 1:1±1%
- OCL: 7mH Min @10KHz, 0.1V
- Q: 15 Min @10KHz, 0.1V each wdg
- PIN1-2, PIN4-3 DCR: 2.50 Ohms Max.
- Rated Current: 0.30AAC
- HIPOT: 2000VAC (PIN1-2 TO PIN4-3)
- 2000VAC (Windings to Core)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from 0°C to +70°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc www.XFMRs.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0073-00U2	REV. A
TOLERANCES: .xx ±0.30	DWN.	Yuan	Oct-22-14
Dimensions in MM	CHK.	YK Liao	Oct-22-14
SHEET 1 OF 2	APP.	DDC	Oct-22-14

DOC. REV: A/2