


PCB LAYOUT - COMPONENT VIEW
TOLERANCES ±0.05

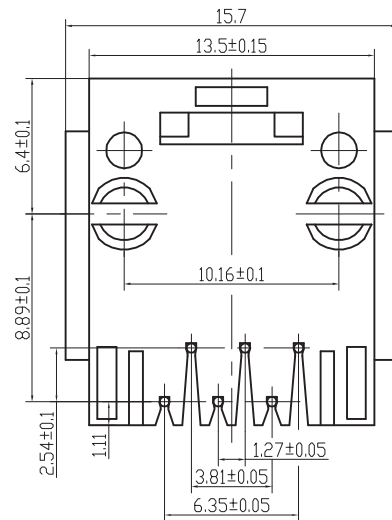

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: PBT
COLOR: BLACK
FLAMMABILITY RATING: UL94-V0
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX

STANDARD
ROHS CERTIFIED: E324776

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
TRAY

RoHS Compliant			
J	28-JUL-14	GENERAL UPDATE	AS
I	03-JAN-1	TPK DWG ADD	QL
H	19-AUG-13	DIM CORRECTION	QL
REV	DATE	FILE	BY



GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: VERTICAL PLASTIC 6P6C MODULAR JACK WITH EARS

SIZE

SCALE:

WERI PART NO: 615 006 138 521

A4

SHEET: 1/1

DRAW:

