


Film, Metallized Polyester Stacked, Commercial Grade, F161, 0.1 uF, 10%, 100 V, 63 V, 85C, 2220, 4mm

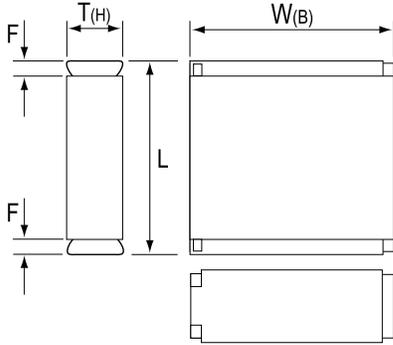

Note: '()' correspond to the letters used in the product bulletin

General Information	
<b>Dielectric:</b>	Metallized Polyester Stacked
<b>Style:</b>	SMD Chip
<b>Series:</b>	F161
<b>RoHS:</b>	Yes
<b>Approvals:</b>	AEC-Q200
<b>AEC-Q200:</b>	Yes
<b>Miscellaneous:</b>	This Capacitor Is Currently Under Development, Please Contact Kemet For Availability

Dimensions	
<b>Chip Size</b>	2220
<b>L</b>	5.7mm +/-0.2mm
<b>W</b>	5mm +/-0.2mm
<b>T</b>	4mm +/-0.2mm
<b>F</b>	0.5mm NOM

Packaging Specifications	
<b>Packaging:</b>	T&R
<b>Packaging Quantity:</b>	2100

Specifications	
<b>Capacitance:</b>	0.1 uF
<b>Capacitance Tolerance:</b>	10%
<b>Voltage DC:</b>	100 VDC
<b>Voltage AC:</b>	63 V
<b>Temperature Range:</b>	-55/+125C
<b>Rated Temperature:</b>	85C
<b>Dissipation Factor:</b>	0.8% 1kHz, 1.2% 10kHz, 2.5% 100kHz
<b>Insulation Resistance:</b>	1 GOhms
<b>Max dVdt:</b>	30 V