


Technical Data Sheet

Rosenberger

MultiMag 6

Cable Assembly

L99-A0039-XXX

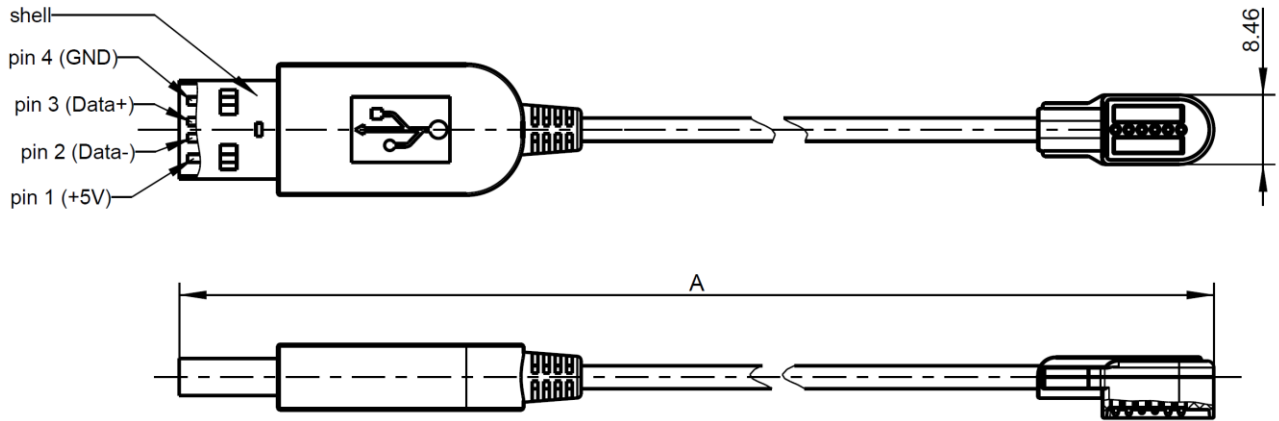

Kabellänge / cable length			
Bereich Länge "A" (mm) <i>range length "A" (mm)</i>	50 bis 100 <i>50 to 100</i>	101 bis 1000 <i>101 to 1000</i>	1001 bis 5000 <i>1001 to 5000</i>
Toleranz für "A" (mm) <i>tolerance for "A" (mm)</i>	±5	±10	±20

All dimensions are in mm; tolerances according to ISO 2768 C

General Information

MultiMag 6 cable assembly consisting of

- Break-off plug with magnets
- Number and type of contacts: 6 spring-loaded contacts
- USB 2.0 cable
- USB-A connector

Available Versions

Type	Description
L99-029-XXX	Black, similar RAL 9005
L99-A0039-XXX	White, similar RAL 9010


"XXX" is coding for length "A" in mm

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09.14/6.2

Technical Data break-off plug

Belegungsplan / pin and cable table		
USB 2.0 A	Kabel / cable	Magnet-schnittstelle magnetic interface
pin 1	Rot / red	pin 1
pin 2	Weiss / white	pin 2
pin 3	Grün / green	pin 3
pin 4	Schwarz / black	pin 4
pin 5	--- / shell	pin 5
pin 6	--- / shell	pin 6

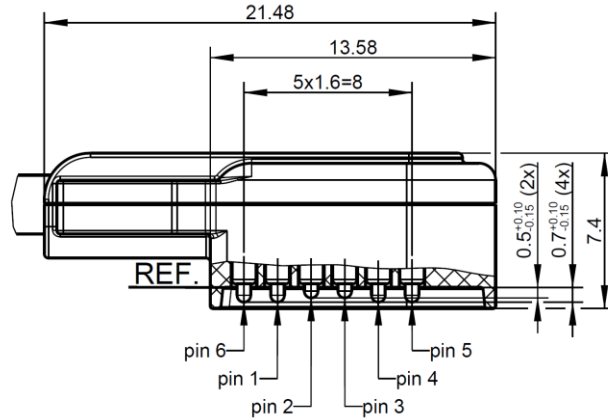

All dimensions are in mm; tolerances according to ISO 2768 C

Interface

Mating with

MultiMag 6 Receptacle

Material and Plating break-off plug

Connector parts

Housing bottom and top
Magnets

Material
PC+ABS
NdFeB

Plating / Color
White, similar RAL 9010
Nickel plated

Spring loaded contacts

Piston
Ferrule
Spring

Material
Brass
Brass
Stainless steel wire

Plating / Color
Gold plated
Gold plated

Connectors

USB-A

According to USB 2.0 specification


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09_14/6.2

Cable

USB 2.0 cable

According to USB 2.0 specification

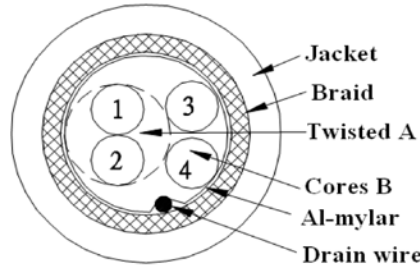

Twisted pair (1, 2)

Stranded tinned copper wire with PE insulation

2x
28 AWG, Ø 0.40 mm
Ø 0.80 mm, green and white

Wire (3, 4)

Stranded tinned copper wire with PVC insulation

2x
28 AWG, Ø 0.40 mm
Ø 0.80 mm, black and red

Drain wire

Tinned copper

1x
Ø 0.127 mm

**Foil coverage
Braid shield**

Al mylar
Tinned copper

Jacket

TPE

Ø 3.40 mm

Electrical Data

Electrical data acc. to USB 2.0 specification

Maximum voltage 5 V
Maximum current 0.5 A
Contact resistance typically ≤ 50 mΩ

Mechanical Data

Mating cycles min. 5.000
Disengagement force average ~ 8 N

Environmental Data

Temperature range -20 °C to +60 °C
Magnets start losing their magnetic properties above 65 °C
RoHS compliant

Packing

Standard 1 pc in plastic bag
Weight Depending on cable length

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
M. Portenkirchner	23.01.15	T. Scheuerlein	23.11.16	a00	16-s361	S.Hofmeister	23.11.16

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de						Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 3 / 3
--	--	--	--	--	--	--	--	---------------