

LDX-SC12

12 V Super Capacitors Module

The LDX-SC12 Super Capacitors Module is used to replace 12 V batteries for short term backup applications.

Multiple parallel and series connection are possible for voltage and/or current increase.

Simple but elegant look and ease of installation make it ideal for various industrial applications.



Key Features & Benefits

- Compact size, standard enclosure shape
- Reliable topology, based on new technology of Electric Double Layer Capacitors
- > 7.6 kJ (2.1 Wh) energy storage
- Replaces 12V batteries for short term backup applications
- Extended operating temperature for high reliability
- Multiple parallel and series connection possibilities for voltage and/or current increase
- Reverse polarity and overcurrent protections
- Pluggable connectors
- Up to 85°C operating temperature

1. TECHNICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input DC Rated Voltage	Nominal: Range:	12 VDC 0 – 16 VDC
Absolute Maximum Voltage		17 VDC
Energy Storage Capacity		7.6 kJ (2.1 Wh)
Input Current for Capacitor Charging		20 A max
Charging Time	See Figure 1	
Output Current for Capacitor Discharging	30 A for 5 sec (see Figures 2, 3, 4)	20 A
Protections	Reverse polarity connection Short circuit through 30A/32V ATO blade, user replaceable Overvoltage protection	
Operating Temperature	Overtemperature protection	- 40 to + 85°C
Voltage Derating		- 120 mV / °C over 65°C
Storage Temperature		- 40 to + 80°C
Humidity	Non-condensing	5 - 95% RH
Cooling	Natural convection	
Charging / Discharging Cycles	At 25°C ambient	500 000
Life Time Expectancy	At 25°C ambient	10 years
DC Bus / Ground Isolation		0.75 kVDC
Safety Standards	UL508 (reference) EN60950 (reference)	
EMC Standards	Emission	EN55022 (CISPR11) EN55011 (CISPR22)
	Immunity	EN61000-4-2
		EN61000-4-3
		EN61000-4-4
		EN61000-4-5
Protection Degree	EN60529	IP20
Vibration Sinusoidal	IEC 60068-2-6	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2 g 2Hours / axis (X,Y,Z)
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total
Weight		750 g
Dimensions		80 x 120 x 110 mm
Connection Terminals	Screw type pluggable (24 - 12 AWG)	2.5 mm ²
Case Material	Aluminum	

NOTE:

Technical parameters are typical, measured in laboratory environment at 25°C and 16 VDC.

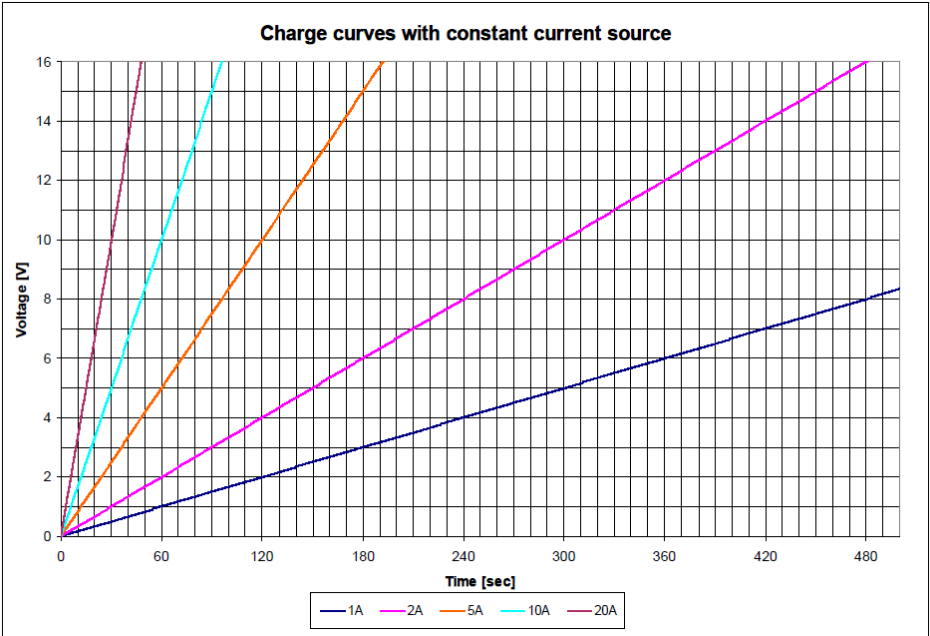


Figure 1.

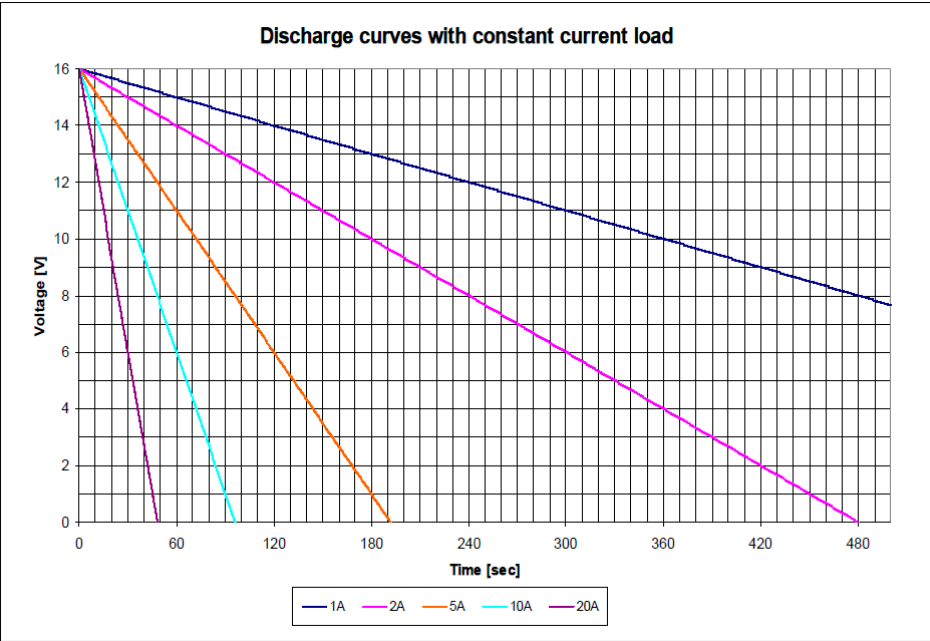


Figure 2.

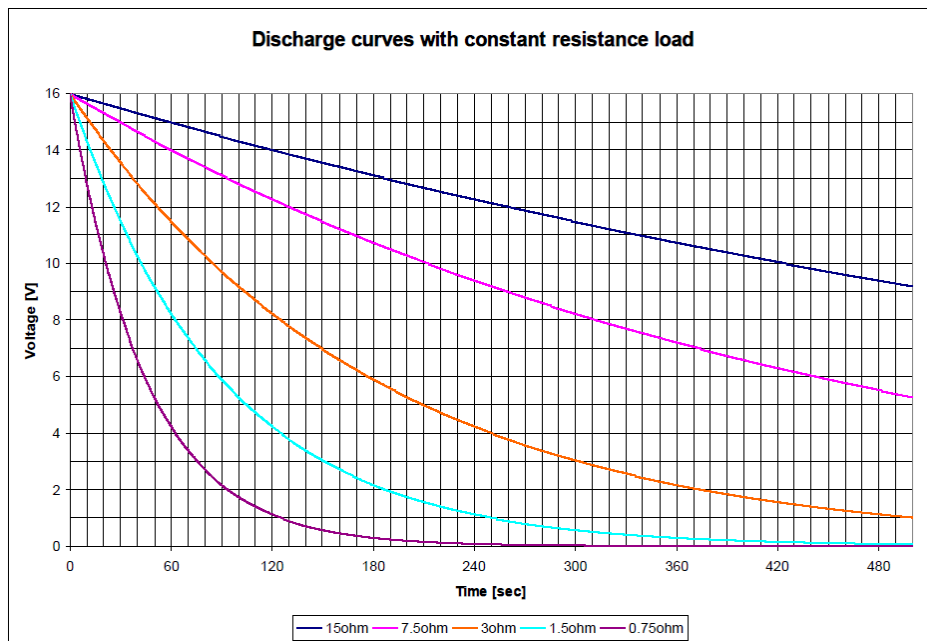


Figure 3.

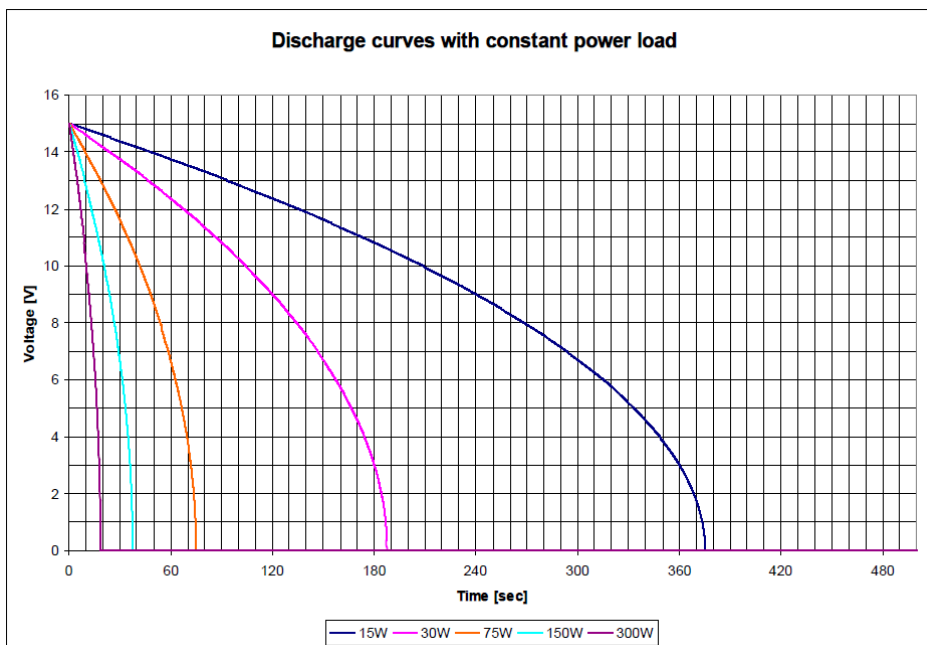


Figure 4.

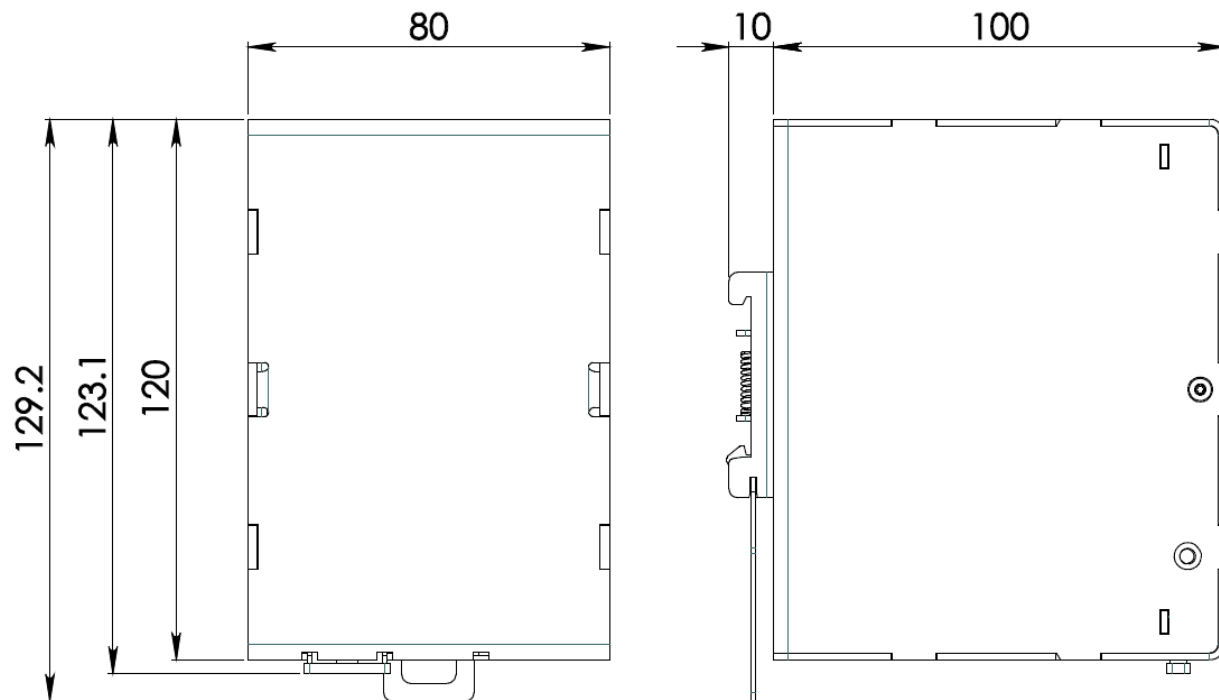


Figure 5. Mechanical Drawing

2. PIN LAYOUT & DESCRIPTION



INPUT / OUTPUT CONNECTION

+ = Positive DC
- = Negative DC

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.