


P.C. MOUNTING




| SWITCH FUNCTION | | |
|-----------------|--------|--------|
| POS. 1 | POS. 2 | POS. 3 |
| | | |
| ON | NONE | ON |
| 2-3 | N/A | 2-1 |




CIRCUIT: SPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 3A @120VAC, 1A @250VAC
6. ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
- ▲ 10. HARDWARE TO BE SHIPPED BULK
T200001 - HEXNUT - QTY 2
T200000 - LOCKWASHER - QTY 1
T200002 - LOCKRING - QTY 1
11. ▲ DENOTES CRITICAL PARAMETER.

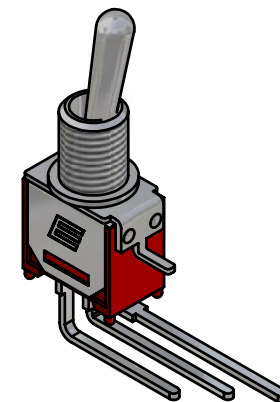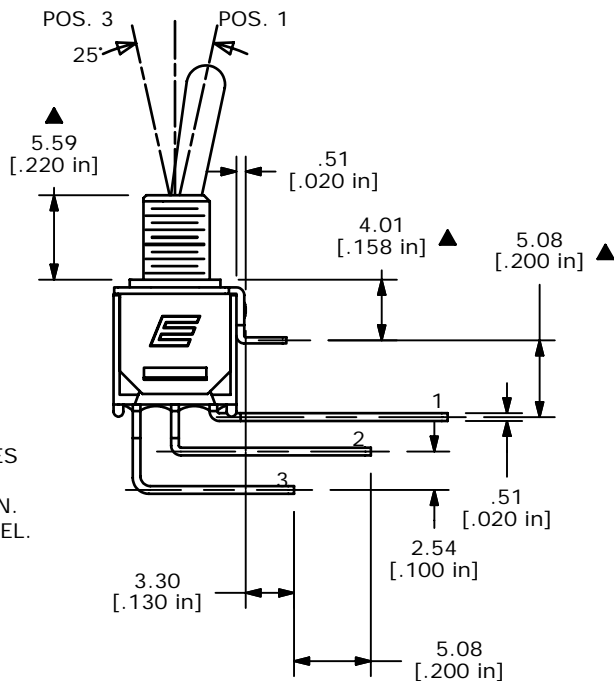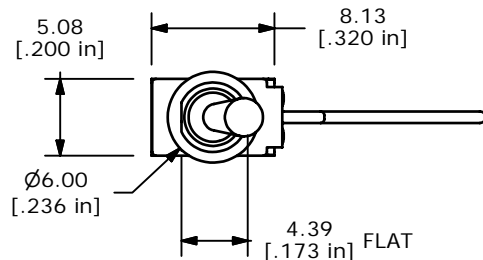

ISOMETRIC

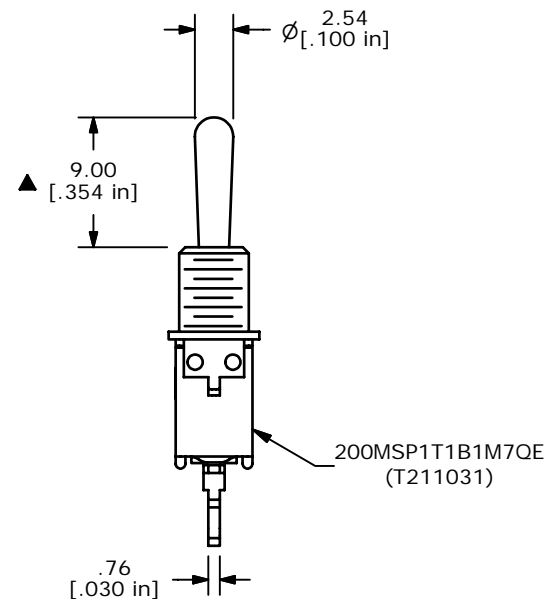

200MSP1T1B1M7QE (T211031)

| | | | | |
|-----|--------|---------------------------------|---------|----|
| C | 16058 | UPDATE DIMS AND SWITCH FUNCTION | 5/30/06 | CT |
| B | 15590 | CHANGE HEX NUT FROM T200015 | 12/6/05 | PH |
| A | 14924 | RELEASED FOR PRODUCTION | 5/25/05 | JB |
| REV | PCR NO | DESCRIPTION | DATE | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



| | | | | |
|------------------------|----------------|-------|--------------|-------|
| TITLE 200MSP1T1B1M7QEH | | | | |
| SCALE 2:1 | DATE 5/25/2005 | DR JB | DWG ST211031 | REV C |