

**VOLTAGE RANGE: 3.3 - 240V**



**POWER: 1.5Watts**

### Features

- Complete Voltage Range 3.3 to 240 Volts
- High peak reverse power dissipation
- High reliability
- Low leakage current

### Mechanical Data

- Case: DO - 41 Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.34 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

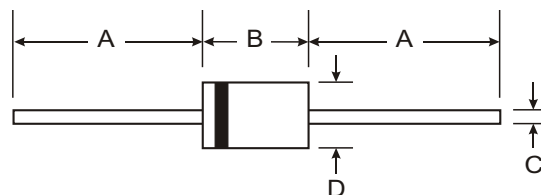

| DO-41                |       |       |
|----------------------|-------|-------|
| Dim                  | Min   | Max   |
| A                    | 25.40 | —     |
| B                    | 4.06  | 5.21  |
| C                    | 0.71  | 0.864 |
| D                    | 2.00  | 2.72  |
| All Dimensions in mm |       |       |

### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

| Rating   | Symbol           | Value         | Unit  |
|--|------------------|---------------|-------|
| DC Power Dissipation at T <sub>L</sub> = 75 °C (Note1)     | PD               | 1.5           | Watts |
| Maximum Forward Voltage at I <sub>F</sub> = 200 mA         | V <sub>F</sub>   | 1.5           | Volts |
| Maximum Thermal Resistance Junction to Ambient Air (Note2) | R <sub>θJA</sub> | 130           | K / W |
| Junction Temperature Range                                 | T <sub>J</sub>   | - 55 to + 175 | °C    |
| Storage Temperature Range                                  | T <sub>s</sub>   | - 55 to + 175 | °C    |

**Note:**

- (1) T<sub>L</sub> = Lead temperature at 3/8 " (9.5mm) from body
- (2) Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case.



## ELECTRICAL CHARACTERISTICS Rating at = 25 °C ambient temperature unless otherwise specified

| TYPE    | Nominal Zener Voltage            |                 | Maximum Zener Impedance           |                                   |                 | Maximum Reverse Leakage Current |       | Maximum DC Zener Current |
|---------|----------------------------------|-----------------|-----------------------------------|-----------------------------------|-----------------|---------------------------------|-------|--------------------------|
|         | V <sub>Z</sub> @ I <sub>ZT</sub> | I <sub>ZT</sub> | Z <sub>ZT</sub> @ I <sub>ZT</sub> | Z <sub>ZK</sub> @ I <sub>ZK</sub> | I <sub>ZK</sub> | I <sub>R</sub> @ V <sub>R</sub> |       | I <sub>ZM</sub>          |
|         | (V)                              | (mA)            | (Ω)                               | (Ω)                               | (mA)            | (μA)                            | (V)   | (mA)                     |
| 1N5913A | 3.3                              | 113.6           | 10                                | 500                               | 1.0             | 100                             | 1.0   | 454                      |
| 1N5914A | 3.6                              | 104.2           | 9.0                               | 500                               | 1.0             | 75                              | 1.0   | 416                      |
| 1N5915A | 3.9                              | 96.1            | 7.5                               | 500                               | 1.0             | 25                              | 1.0   | 384                      |
| 1N5916A | 4.3                              | 87.2            | 6.0                               | 500                               | 1.0             | 5.0                             | 1.0   | 348                      |
| 1N5917A | 4.7                              | 79.8            | 5.0                               | 500                               | 1.0             | 5.0                             | 1.5   | 319                      |
| 1N5918A | 5.1                              | 73.5            | 4.0                               | 500                               | 1.0             | 5.0                             | 2.0   | 294                      |
| 1N5919A | 5.6                              | 66.9            | 2.0                               | 500                               | 1.0             | 5.0                             | 3.0   | 267                      |
| 1N5920A | 6.2                              | 60.5            | 2.0                               | 200                               | 1.0             | 5.0                             | 4.0   | 241                      |
| 1N5921A | 6.8                              | 55.1            | 2.5                               | 200                               | 1.0             | 50                              | 5.2   | 220                      |
| 1N5922A | 7.5                              | 50.0            | 3.0                               | 400                               | 0.5             | 50                              | 6.0   | 200                      |
| 1N5923A | 8.2                              | 45.7            | 3.5                               | 400                               | 0.5             | 50                              | 6.5   | 182                      |
| 1N5924A | 9.1                              | 41.2            | 4.0                               | 500                               | 0.5             | 50                              | 7.0   | 164                      |
| 1N5925A | 10                               | 37.5            | 4.5                               | 500                               | 0.25            | 50                              | 8.0   | 150                      |
| 1N5926A | 11                               | 34.1            | 5.5                               | 550                               | 0.25            | 50                              | 8.4   | 136                      |
| 1N5927A | 12                               | 31.2            | 6.5                               | 550                               | 0.25            | 1.0                             | 9.1   | 125                      |
| 1N5928A | 13                               | 28.8            | 7.0                               | 550                               | 0.25            | 1.0                             | 9.9   | 115                      |
| 1N5929A | 15                               | 25.0            | 9.0                               | 600                               | 0.25            | 1.0                             | 11.4  | 100                      |
| 1N5930A | 16                               | 23.4            | 10                                | 600                               | 0.25            | 1.0                             | 12.2  | 93                       |
| 1N5931A | 18                               | 20.8            | 12                                | 650                               | 0.25            | 1.0                             | 13.7  | 83                       |
| 1N5932A | 20                               | 18.7            | 14                                | 650                               | 0.25            | 1.0                             | 15.2  | 75                       |
| 1N5933A | 22                               | 17.0            | 17.5                              | 650                               | 0.25            | 1.0                             | 16.7  | 68                       |
| 1N5934A | 24                               | 15.6            | 19                                | 700                               | 0.25            | 1.0                             | 18.2  | 62                       |
| 1N5935A | 27                               | 13.9            | 23                                | 700                               | 0.25            | 1.0                             | 20.6  | 55                       |
| 1N5936A | 30                               | 12.5            | 26                                | 750                               | 0.25            | 1.0                             | 22.8  | 50                       |
| 1N5937A | 33                               | 11.4            | 33                                | 800                               | 0.25            | 1.0                             | 25.1  | 45                       |
| 1N5938A | 36                               | 10.4            | 38                                | 850                               | 0.25            | 1.0                             | 27.4  | 41                       |
| 1N5939A | 39                               | 9.6             | 45                                | 900                               | 0.25            | 1.0                             | 29.7  | 38                       |
| 1N5940A | 43                               | 8.7             | 53                                | 950                               | 0.25            | 1.0                             | 32.7  | 34                       |
| 1N5941A | 47                               | 8.0             | 67                                | 1000                              | 0.25            | 1.0                             | 35.8  | 31                       |
| 1N5942A | 51                               | 7.3             | 70                                | 1100                              | 0.25            | 1.0                             | 38.8  | 29                       |
| 1N5943A | 56                               | 6.7             | 86                                | 1300                              | 0.25            | 1.0                             | 42.6  | 26                       |
| 1N5944A | 62                               | 6.0             | 100                               | 1500                              | 0.25            | 1.0                             | 47.1  | 24                       |
| 1N5945A | 68                               | 5.5             | 120                               | 1700                              | 0.25            | 1.0                             | 51.7  | 22                       |
| 1N5946A | 75                               | 5.0             | 140                               | 2000                              | 0.25            | 1.0                             | 56.0  | 20                       |
| 1N5947A | 82                               | 4.6             | 160                               | 2500                              | 0.25            | 1.0                             | 62.2  | 18                       |
| 1N5948A | 91                               | 4.1             | 200                               | 3000                              | 0.25            | 1.0                             | 69.2  | 16                       |
| 1N5949A | 100                              | 3.7             | 250                               | 3100                              | 0.25            | 1.0                             | 76.0  | 15                       |
| 1N5950A | 110                              | 3.4             | 300                               | 4000                              | 0.25            | 1.0                             | 83.6  | 13                       |
| 1N5951A | 120                              | 3.1             | 380                               | 4500                              | 0.25            | 1.0                             | 91.2  | 12                       |
| 1N5952A | 130                              | 2.9             | 450                               | 5000                              | 0.25            | 1.0                             | 98.8  | 11                       |
| 1N5953A | 150                              | 2.5             | 600                               | 6000                              | 0.25            | 1.0                             | 114.0 | 10                       |
| 1N5954A | 160                              | 2.3             | 700                               | 6500                              | 0.25            | 1.0                             | 121.6 | 9.0                      |
| 1N5955A | 180                              | 2.1             | 900                               | 7000                              | 0.25            | 1.0                             | 136.8 | 8.0                      |
| 1N5956A | 200                              | 1.9             | 1200                              | 8000                              | 0.25            | 1.0                             | 152.0 | 7.0                      |
| 1N5957A | 240                              | 1.5             | 1600                              | 9000                              | 0.25            | 1.0                             | 182.4 | 6.0                      |

**Note :**

( 1 ) Suffix " A " indicates ± 10% tolerance, suffix " B " indicates ± 5.0% tolerance.

