

Pb Free Plating Product

GSA1601 thru GSA1607



16.0 Ampere General Purpose Rectifier Diodes for PhotoVoltaic

Features


- * Glass passivated chip junction
- * Low forward voltage drop
- * High current capability
- * Low reverse leakage current
- * High surge current capability

Application

- * BY-PASS DIODE application
- * Solar power supply and PV system
- * PV diode for Solar Junction Box

Mechanical Data

- * Case: Heatsink TO-220AC
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solderable per MIL-STD-202 method 208
- * Polarity: As marked on diode body
- * Mounting position: Any
- * Weight: 2.1 gram approxiamtely

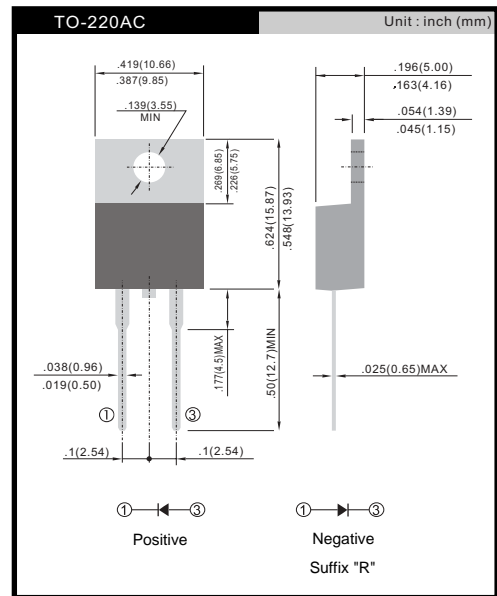

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	GSA 1601	GSA 1602	GSA 1603	GSA 1604	GSA 1605	GSA 1606	GSA 1607	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified @Tc = 100°C	I(AV)	16.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	250							A
Maximum Instantaneous Forward Voltage @ 16.0A	VF	1.1							V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=125°C	IR	10 250							uA
Typical Junction Capacitance (Note 1)	Cj	100							pF
Typical Thermal Resistance (Note 2)	RθJC	2.0							°C/W
Operating Temperature Range	TJ	-65 to +150							°C
Storage Temperature Range	TSTG	-65 to +150							°C

Note 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

2. Mount on P.C. Board with 2"x3" x0.25" Al-plate

RATINGS AND CHARACTERISTICS CURVES(GSA1601 thru GSA1607)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

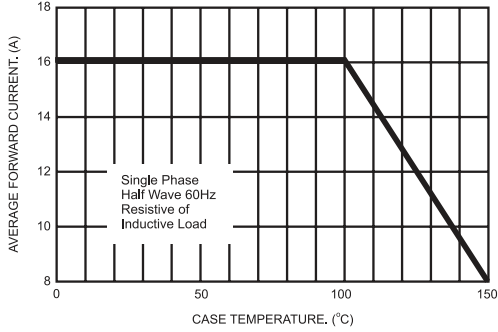


FIG.2- TYPICAL REVERSE CHARACTERISTICS

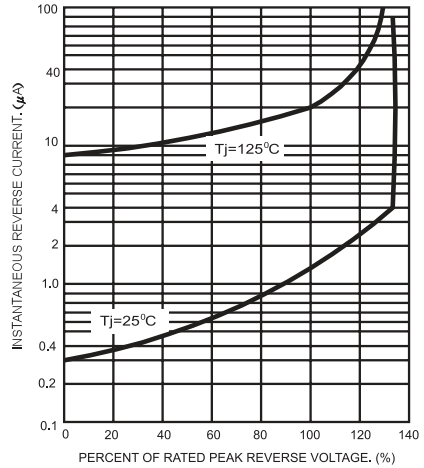


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

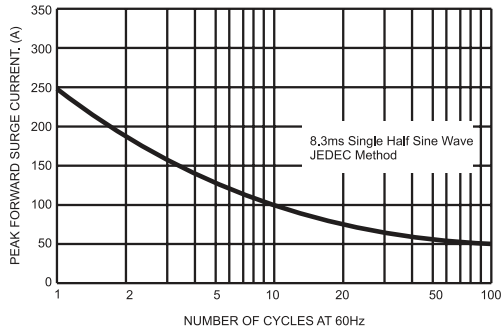


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

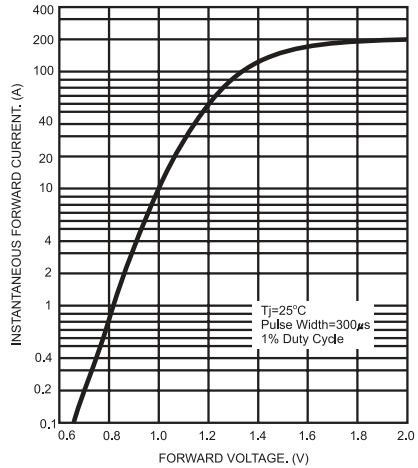


FIG.4- TYPICAL JUNCTION CAPACITANCE

