

4840, solder terminal, Plug, 6.5 mm, 2-pole, DC Plug/Socket




### Description

- Solder terminal :  
for cable mounting
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight

### Technical Data

Diameter	6.5 mm / 4.3 mm / 1.4 mm	Allowable Operation Temp.	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	solder terminal nickel-plated
Ratings DC	2 A / 18VDC	Style	straight
Dielectric Strength	500VDC	Lifetime	5000Insertions
Insulation Resistance	> 100 MΩ @ 500VDC		

### Dimensions

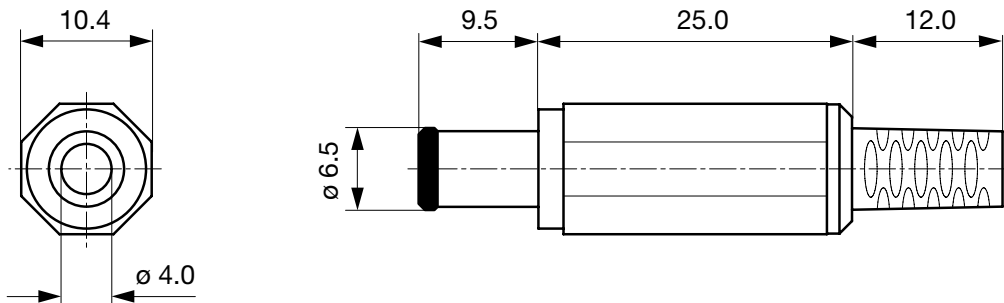

Cable diameter max. 4.0 mm

### All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	6.5	2-pole	solder terminal	4840.1230

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs

## Mating Outlets/Connectors

### Category / Description



[DC Plug/Socket Overview complete](#)

4840, solder terminal, Socket, 7.0 mm, 2-pole, DC Plug/Socket

[4840.2230](#)

4840, PCB terminals, Socket, 7.0 mm, 2-pole, DC Plug/Socket

[4840.2232](#)

[DC Plug/Socket further types to 4840.1230](#)