

### 3mm Round LED (T-1)

#### Features

- Popular T-1 diameter package
- Choice of various viewing angles
- Reliable and robust
- RoHS compliance



QRLNH4R3



#### Descriptions

- The series is specially designed for applications requiring higher brightness.
- The LED lamps are available with different colors, intensities.

#### Applications

- TV set
- Monitor
- Telephone
- Computer

#### Device Selection Guide

Part No.	Chip		Lens Color
	Material	Emitted Color	
TLN-H4R3-1254	GaP	Bright Red	Color Diffused

**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Value	Unit
Reverse Voltage	<b>VR</b>	5	V
Continuous Forward Current	<b>IF</b>	15	mA
Power Dissipation	<b>Pd</b>	45	mW
Peak Forward Current (Duty 1/10@1KHZ)	<b>IF</b>	50	mA
Soldering Temperature (Note.1)	<b>Tsol</b>	260 ± 5	°C
Operating Temperature	<b>Topr</b>	-40 ~ +85	°C
Storage Temperature	<b>Tstg</b>	-40 ~ +100	°C







**Note 1:**

Soldering time ≤ 5 seconds


**Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	<b>Iv</b>	0.63	1.60	-----	mcd	IF =10mA
Viewing Angle	<b>2θ1/2</b>	-----	40	-----	deg	
Peak wavelength	<b>λp</b>	-----	697	-----	nm	
Dominant wavelength	<b>λd</b>	-----	650	-----	nm	
Spectrum Radiation Bandwidth	<b>Δλ</b>	-----	90	-----	nm	
Forward Voltage	<b>VF</b>	1.5	2.0	2.4	V	
Reverse Current	<b>IR</b>	-----	-----	10	μA	VR=5V

### Typical Electro-Optical Characteristics Curves (Ta=25°C)

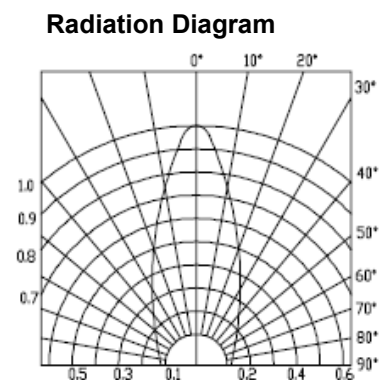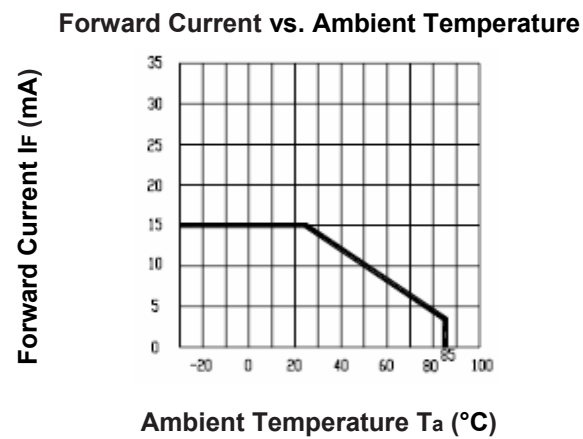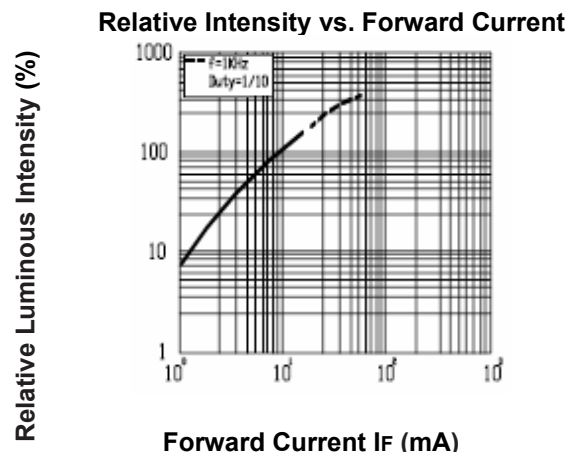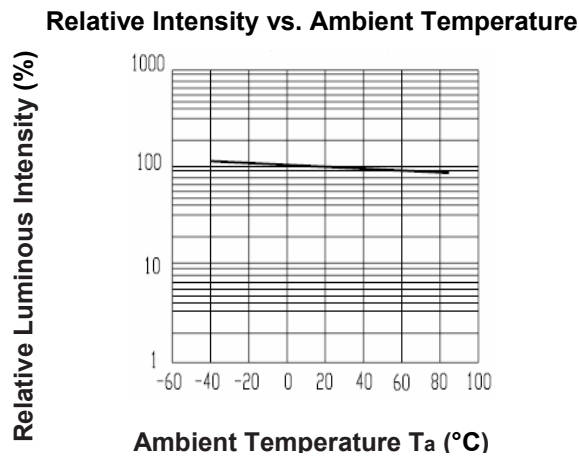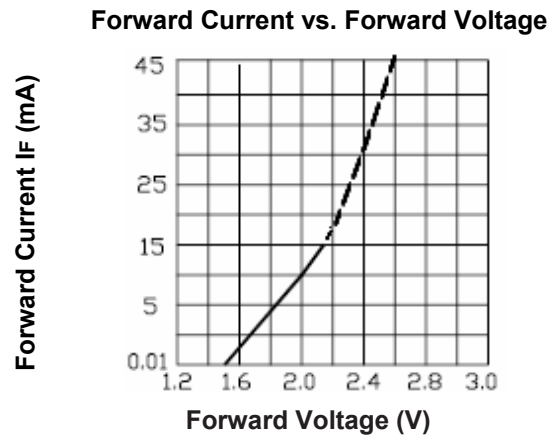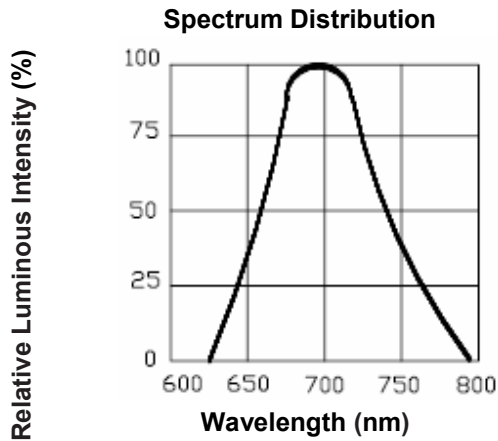

### Package Dimensions (In mm)

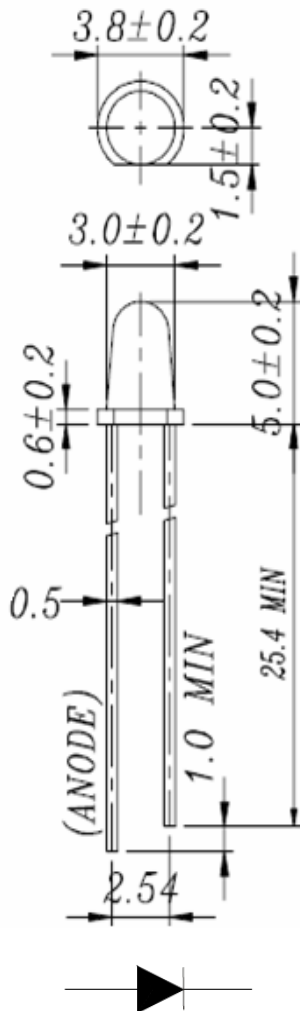

#### Note:


1. All dimensions are in millimeters, and tolerance is 0.25mm without special declared.
2. An epoxy meniscus may extend about 1.5mm down the lead.

### Packing Quantity Specification

1. 1000 PCS/1 Bag, 5 Bags/1 Box
2. 10 Boxes/1 Carton

Ordering Information

TL N - H 4 R 3 - 1254 - XX - BL

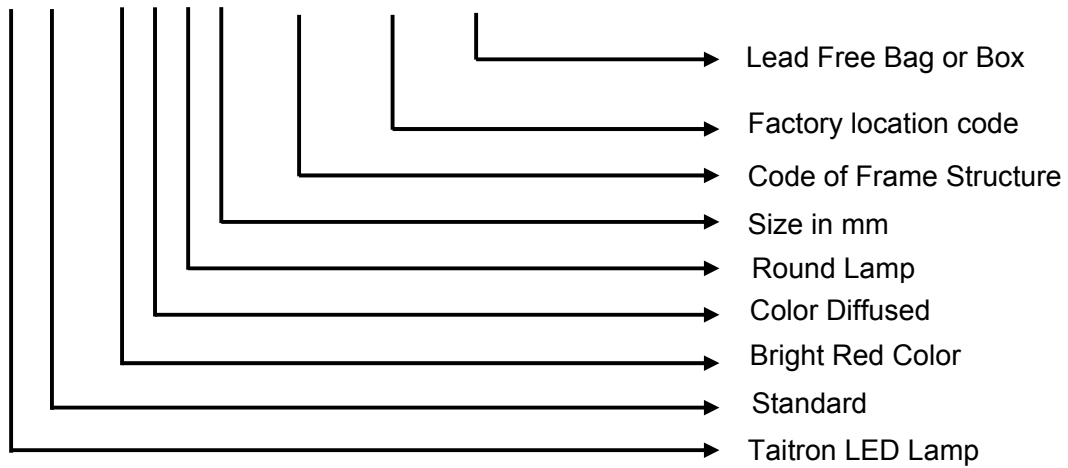

**How to contact us**

**US HEADQUARTERS**

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: [taitron@taitroncomponents.com](mailto:taitron@taitroncomponents.com)

Http://[www.taitroncomponents.com](http://www.taitroncomponents.com)

**TAITRON COMPONENTS MEXICO, S.A .DE C.V.**

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO  
C.P. 42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

**TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA**

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001  
BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

**TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE**

METROBANK PLAZA, 1160 WEST YAN'AN ROAD, SUITE 1502, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931