

VOLTAGE -CONTROLLED CRYSTAL OSCILLATOR (VCXO)

OUTPUT: LV-PECL


NEW

VG7050EBN

- Frequency range : 600 MHz to 800 MHz
- Supply voltage : 2.5 V / 3.3 V
- External dimensions : 7.0 × 5.0 × 1.5 mm (6 pins)
- Absolute Pull Range : ±50 × 10⁻⁶ Min., ±100 × 10⁻⁶ Min.
- Function : Output Enable(OE)
- Output : LV-PECL



Product Number (please contact us)
X1G004551xxxx00

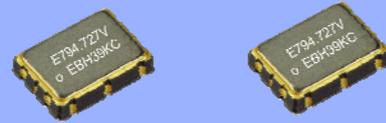

Actual size



Specifications (characteristics)

Item	Symbol	Specifications	Conditions / Remarks
Output frequency range	fo	600.000 MHz to 800.000 MHz	Please contact us about available frequencies.
		698.8123 MHz, 753.6211 MHz, 794.7278 MHz	Standard frequency
Supply voltage	Vcc	D: 2.5 V ± 0.125 V, C: 3.3 V ± 0.33 V	
Storage temperature range	T_stg	-55 °C to +125 °C	Store as bare product after packing
Operating temperature range	T_use	-40 °C to +85 °C	
Frequency tolerance*1	f_tol	±50 × 10 ⁻⁶ Max.	Includes frequency aging (10 years)
Current consumption	Icc	90 mA Max.	
Absolute pull range	APR	±50 × 10 ⁻⁶ Min. ±100 × 10 ⁻⁶ Min.	Vc= 1.65 V ±1.35 V (Vcc = 3.3 V) Vc= 1.25 V ±1.00 V (Vcc = 2.5 V)
Input resistance	Rin	5 MΩ Min.	DC level
Frequency change polarity	-	Positive slope	0 to Vcc
Symmetry	SYM	45 % to 55 %	at outputs cross point
High output voltage	VOH	Vcc-1.025 V Min.	DC characteristics
Low output voltage	VoL	Vcc-1.62 V Max.	
Output load condition	L_ECL	50 Ω	Terminated to Vcc-2.0V
High input voltage	VIH	70% Vcc Min.	
Low input voltage	VIL	30% Vcc Max.	
Rise/Fall times	tr/tf	0.4 ns Max.	between 20% and 80% of (VOH-VoL)
Oscillation start up time	t_str	10ms Max.	Time at minimum supply voltage to be 0 s
Phase Jitter	tPJ	0.2ps Typ.	Offset Frequency 12kHz to 20MHz

*1 Frequency tolerance includes initial frequency tolerance, temperature variation, supply voltage change and reflow drift and 10 years aging at +25 °C.

Product name **VG7050 EBN 698.812335 MHz C J G H B Z**
(Standard form) ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ①Model ②Output (E: LV-PECL) ③Frequency ④Supply voltage (C: 3.3 V Typ., D: 2.5 V Typ.)
- ⑤Frequency tolerance (J: ±50 × 10⁻⁶ Max.) ⑥Operating temperature (G: -40 to +85°C)
- ⑦OE Function (H: Active High, L: Active Low) ⑧Absolute Pull Range (B: ±50 × 10⁻⁶ Min., C: ±100 × 10⁻⁶ Min.)
- ⑨Output Standby Type (F: Fix (OUT="L", OUTN="H"), Z: High-Z)

OE Function / OE Standby Type

OE Function	OE Standby Type	Frequency output OE pin	Oscillator Stop	
			OE pin	OUT,OUTN state
H: High Active	Z: High-Z	"H" or "OPEN"	"L"	High Impedance
L: Low Active		"L" or "OPEN"	"H"	
H: High Active	F: Fix	"H" or "OPEN"	"L"	OUT="L", OUTN="H"
L: Low Active		"L" or "OPEN"	"H"	


External dimensions

(Unit :mm)

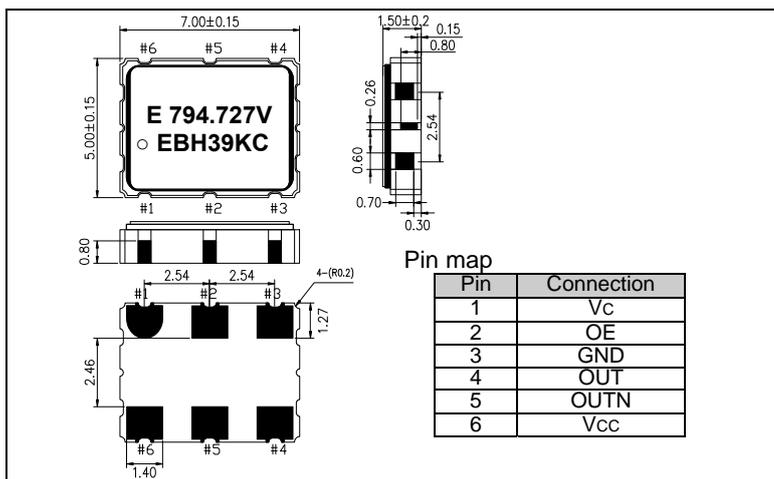

Footprint (Recommended)

(Unit :mm)

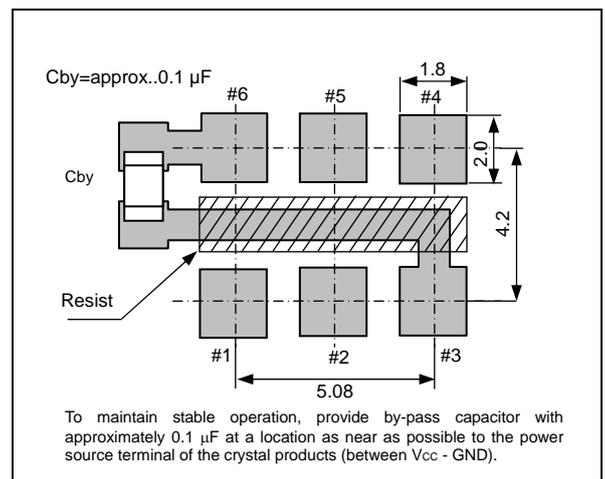

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

► Explanation of the mark that are using it for the catalog

	► Pb free.
	► Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
	► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
	► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc.)

Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does not assume any liability for the occurrence of infringing on any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
/ Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.