



SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm

PIN Diode Switches Technical Data Sheet

PE71S2010

Features

- SPDT Absorptive Switch
- 0.05 GHz to 26.5 GHz
- Insertion Loss 5.0 dB max
- Isolation 55 dB min
- Power Input 27 dBm CW max

Applications

- Test & Measurement
- Military Communication
- Commercial Communication

Description

The PE71S2010 is a SPDT Absorptive Switch designed to operate over the 0.05 GHz to 26.5 GHz Frequency Range. The switch is designed to maintain low insertion loss, high isolation, and fast switching speed.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.05		26.5	GHz
Impedance		50		Ohms
Insertion Loss			5	dB
Isolation	55			dB
Switching Time			100	ns
Input Power (CW)			0.5	Watts
Positive Operating Voltage		5		V
Negative Operating Voltage		-5		V
Operating Temperature	-55		85	deg C

Mechanical Specifications

Size	
Length	1 in [25.4 mm]
Width	1.2 in [30.48 mm]
Height	0.6 in [15.24 mm]
Package Type	Connectorized Module
Design	SPDT, Absorptive
RF Connector	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm PE71S2010](#)



SMA SPDT PIN Diode Switch Operating From
50 MHz to 26.5 GHz Up To +27 dBm

PIN Diode Switches Technical Data Sheet

PE71S2010

Environmental Specifications

Temperature

Operating Range

ESD Sensitivity

-55 to 85 deg C

ESD Sensitive Material, Transport material in Approved
ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm PE71S2010](#)





SMA SPDT PIN Diode Switch Operating From
50 MHz to 26.5 GHz Up To +27 dBm

PIN Diode Switches Technical Data Sheet

PE71S2010

Typical Performance Data

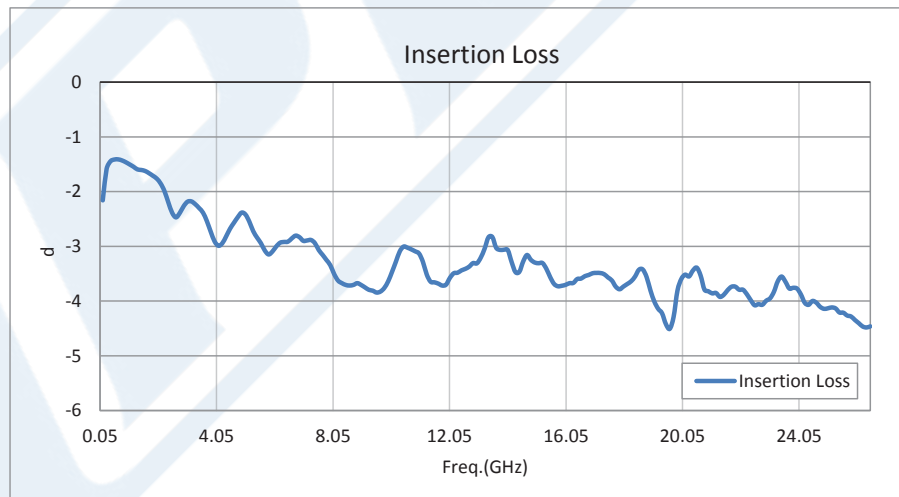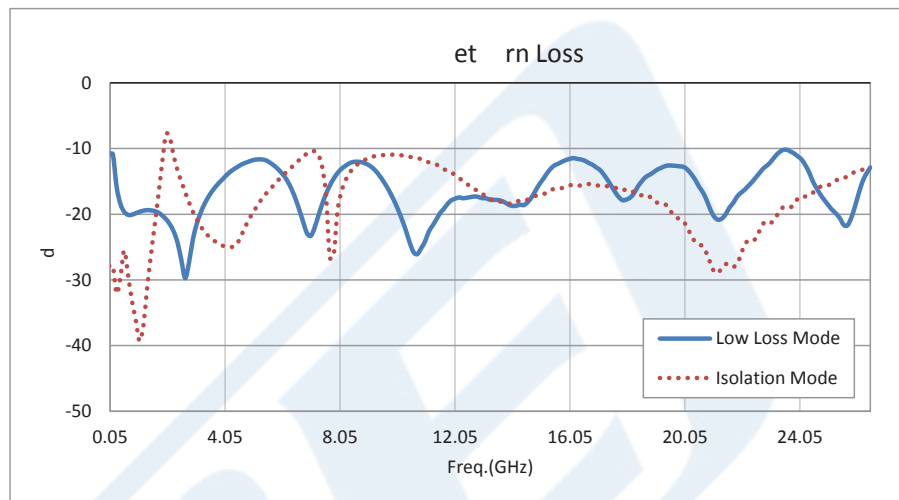

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm PE71S2010](#)






SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm

PIN Diode Switches Technical Data Sheet

PE71S2010

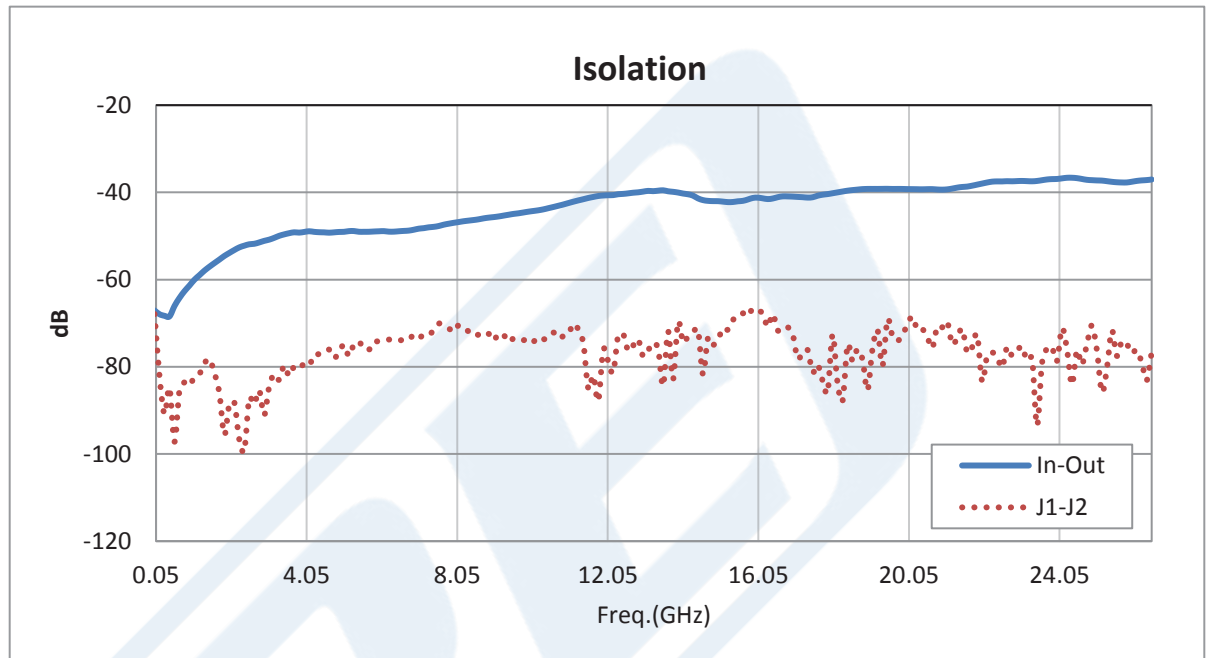

SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm PE71S2010](http://www.pasternack.com/sma-spdt-pin-diode-switch-50-mhz-26.5-ghz-27-dbm-pe71s2010-p.aspx)


URL: <http://www.pasternack.com/sma-spdt-pin-diode-switch-50-mhz-26.5-ghz-27-dbm-pe71s2010-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE71S2010 CAD Drawing

SMA SPDT PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +27 dBm

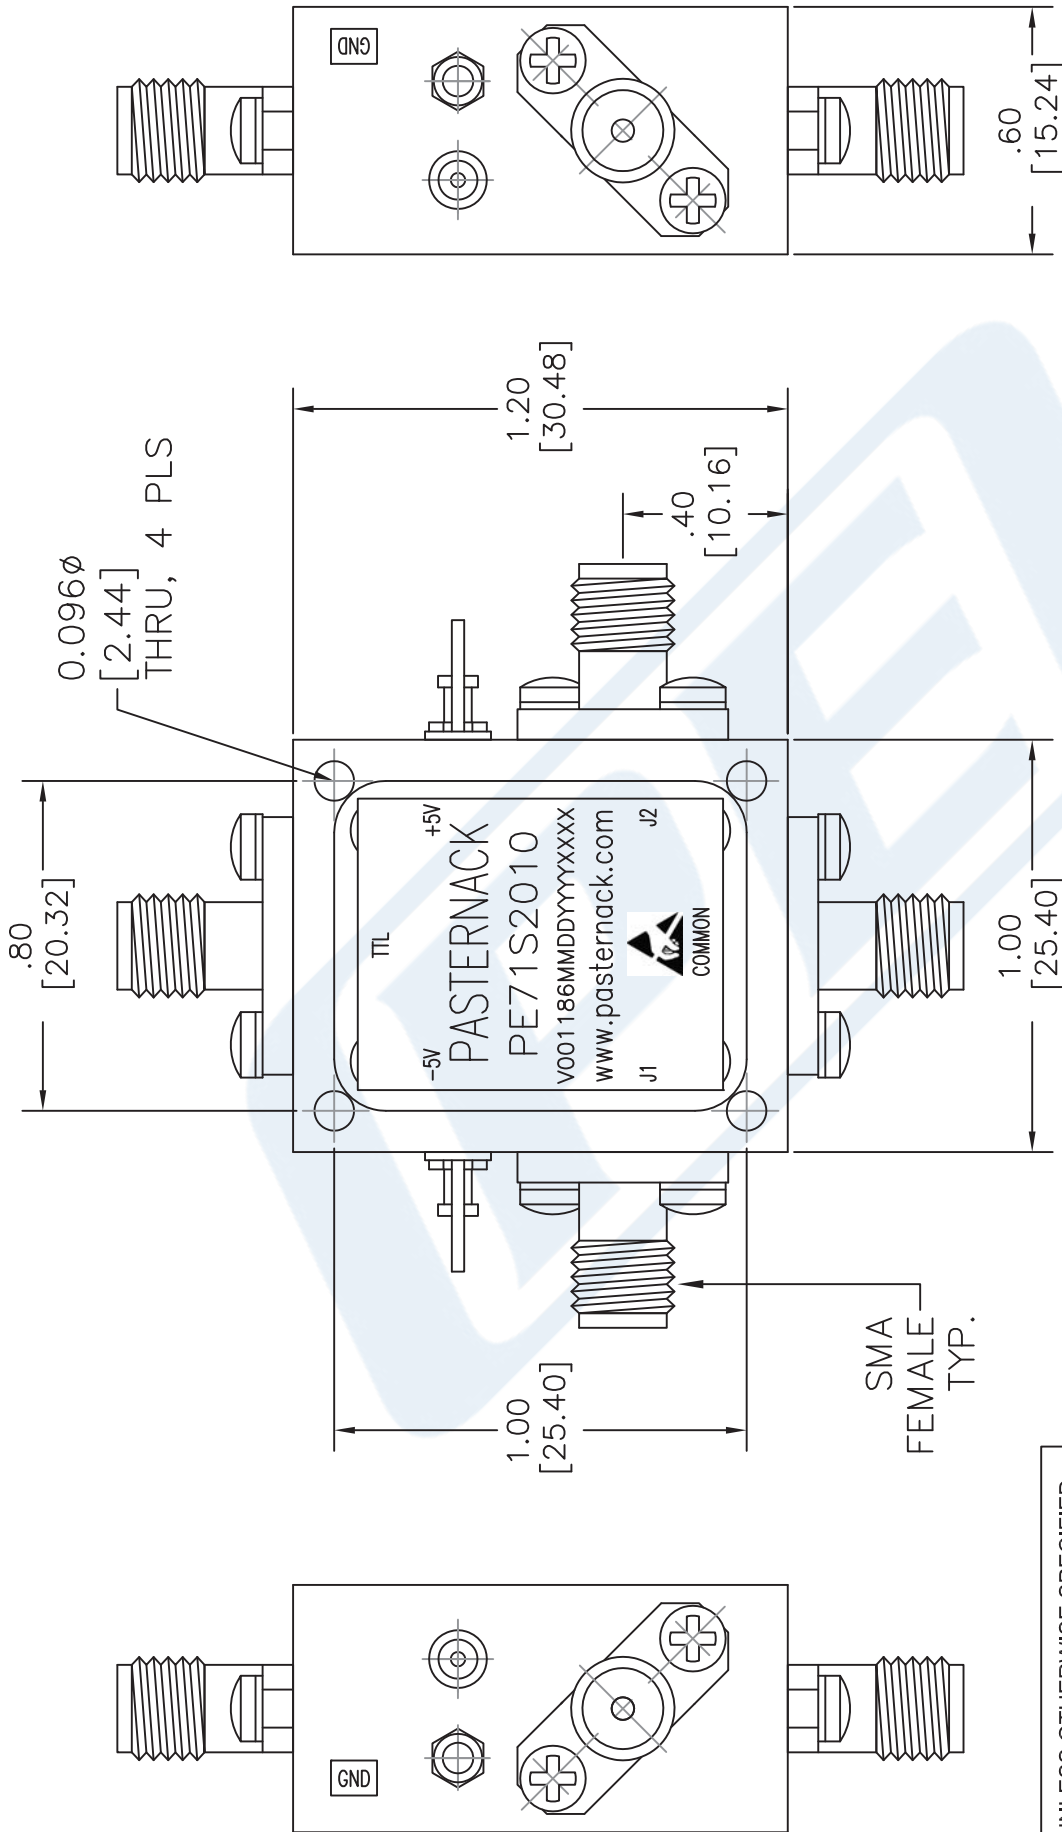

TTL	LOW	ISOLATION
LOGIC	LOSS	
HIGH	C-J2	C-J1
LOW	C-J1	C-J2

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE71S2010

PE PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE 102615 SCALE N/A SIZE A 2233

FSCM NO. 53919

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN: inches
 TOLERANCES ARE: [mm]
 .XX ±.01 [±.25]
 .XXX ±.001 [±.025]

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.