

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0950432892](#)  
**Status:** **Active**  
**Overview:** Magnetic and Modular Jacks and Plugs  
**Description:** Modular Plug, Cat5e, Short Body, Shielded, 8/8, Beige/Gray Boot

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-95043-001 \(PDF\)](#) [Product Literature \(PDF\)](#)  
[Application Specification AS-95043-001 \(PDF\)](#)

**Agency Certification**


CSA LR19980  
 UL E107635

**General**

Product Family Modular Jacks/Plugs  
 Series [95043](#)  
 Comments Colored Boot|Cable to Plug Tensile Strength: 98.0N  
 Component Type Wire Plug  
 Data Load Status Post Go-Live Rev. Not Verified  
 Made From 0950424881, 0950432801, 0951151882  
 Magnetic No  
 Overview Magnetic and Modular Jacks and Plugs  
 Performance Category 5e  
 Power over Ethernet (PoE) N/A  
 Product Literature Order No 987650-8441  
 Product Name Modular Plug 8/8, RJ45  
 UPC 800754225700

**Physical**

Boot Color Gray  
 Color - Resin Clear  
 Durability (mating cycles max) 750  
 Flammability 94V-2  
 Inverted / Top Latch N/A  
 Jack Height N/A  
 Lightpipes/LEDs None  
 Material - Metal Phosphor Bronze  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin Polycarbonate  
 Net Weight 3.080/g  
 Orientation N/A  
 PCB Locator No  
 PCB Retention None  
 Packaging Type Bag  
 Pitch - Mating Interface 1.02mm  
 Plating min - Mating 1.270µm  
 Plating min - Termination 1.270µm  
 Ports 1  
 Positions / Loaded Contacts 8/8  
 Surface Mount Compatible (SMC) N/A  
 Temperature Range - Operating -40°C to +60°C  
 Temperature Range NonOperating -40°C to +60°C  
 Termination Interface: Style IDT or Pierce  
 Waterproof / Dustproof No  
 Wire/Cable Type Round

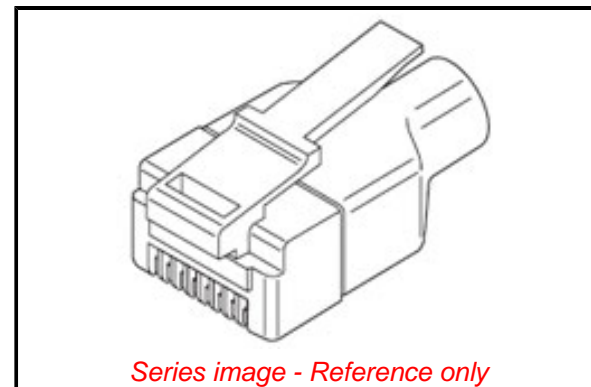

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
 ED/30/2017 (7 July  
 2017)

**Halogen-Free**

**Status**

**Not Low-Halogen**

**Need more information on product  
 environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 Please visit the [Contact Us](#) section for any  
 non-product compliance questions.

China ROHS Green Image  
 ELV Not Relevant  
 RoHS Phthalates Not Contained

**Search Parts in this Series**

[95043 Series](#)

**Mates With**

FCC 68 Jacks

**Electrical**

Current - Maximum per Contact	1.5A
Grounding to Panel	N/A
Shielded	Yes
Voltage - Maximum	125V DC

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-95043-001
Product Specification	PS-95043-001

This document was generated on 02/27/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**