

# HFU2N60F / HFD2N60F

## 600V N-Channel MOSFET


### Features

- Originative New Design
- Very Low Intrinsic Capacitances
- Excellent Switching Characteristics
- 100% Avalanche Tested
- RoHS Compliant


### Key Parameters

Parameter	Value	Unit
$BV_{DSS}$	600	V
$I_D$	2	A
$R_{DS(on)}$ , Typ	3.6	$\Omega$
$Q_g$ , Typ	6.5	nC


HFU2N60F  
TO-251



HFD2N60F  
TO-252



Symbol



### Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Value	Unit
$V_{DSS}$	Drain-Source Voltage	600	V
$I_D$	Drain Current – Continuous ( $T_C = 25^\circ\text{C}$ )	2.0 *	A
	Drain Current – Continuous ( $T_C = 100^\circ\text{C}$ )	1.3 *	A
$I_{DM}$	Drain Current – Pulsed (Note 1)	8.0 *	A
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$E_{AS}$	Single Pulsed Avalanche Energy (Note 2)	110	mJ
$I_{AR}$	Avalanche Current (Note 1)	2.0	A
$E_{AR}$	Repetitive Avalanche Energy (Note 1)	4.2	mJ
$dv/dt$	Peak Diode Recovery $dv/dt$ (Note 3)	4.5	V/ns
$P_D$	Power Dissipation ( $T_A = 25^\circ\text{C}$ )*	2.5	W
	Power Dissipation ( $T_C = 25^\circ\text{C}$ ) - Derate above 25°C	42	W
		0.34	W/ $^\circ\text{C}$
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to +150	$^\circ\text{C}$
$T_L$	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	$^\circ\text{C}$

\* Drain current limited by maximum junction temperature

### Thermal Resistance Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Junction-to-Case, Max.	2.98	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient (minimum pad of 2 oz copper), Max.	110	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient (* 1 in <sup>2</sup> pad of 2 oz copper), Max.	50	$^\circ\text{C}/\text{W}$


**Electrical Characteristics**  $T_J=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
<b>On Characteristics</b>						
$V_{GS}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$ , $I_D = 250 \mu\text{A}$	2.0	--	4.0	V
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS} = 10 \text{ V}$ , $I_D = 1 \text{ A}$	--	3.6	4.5	$\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS} = 30 \text{ V}$ , $I_D = 1 \text{ A}$	--	1.2	--	S
<b>Off Characteristics</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$	600	--	--	V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS} = 600 \text{ V}$ , $V_{GS} = 0 \text{ V}$	--	--	10	$\mu\text{A}$
		$V_{DS} = 480 \text{ V}$ , $T_C = 125^\circ\text{C}$	--	--	100	$\mu\text{A}$
$I_{GSS}$	Gate-Body Leakage Current	$V_{GS} = \pm 30 \text{ V}$ , $V_{DS} = 0 \text{ V}$	--	--	$\pm 100$	nA
<b>Dynamic Characteristics</b>						
$C_{iss}$	Input Capacitance	$V_{DS} = 25 \text{ V}$ , $V_{GS} = 0 \text{ V}$ , $f = 1.0 \text{ MHz}$	--	290	--	pF
$C_{oss}$	Output Capacitance		--	37	--	pF
$C_{rss}$	Reverse Transfer Capacitance		--	4.5	--	pF
<b>Switching Characteristics</b>						
$t_{d(on)}$	Turn-On Time	$V_{DS} = 300 \text{ V}$ , $I_D = 2 \text{ A}$ , $R_G = 25 \Omega$	--	16	--	ns
$t_r$	Turn-On Rise Time		--	17	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	28	--	ns
$t_f$	Turn-Off Fall Time		--	20	--	ns
$Q_g$	Total Gate Charge	$V_{DS} = 480 \text{ V}$ , $I_D = 2 \text{ A}$ , $V_{GS} = 10 \text{ V}$	--	6.5	--	nC
$Q_{gs}$	Gate-Source Charge		--	1.5	--	nC
$Q_{gd}$	Gate-Drain Charge		--	2.2	--	nC
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
$I_S$	Maximum Continuous Drain-Source Diode Forward Current	--	--	2	A	
$I_{SM}$	Maximum Pulsed Drain-Source Diode Forward Current	--	--	8		
$V_{SD}$	Drain-Source Diode Forward Voltage	$V_{GS} = 0 \text{ V}$ , $I_S = 2 \text{ A}$	--	--	1.4	V
$trr$	Reverse Recovery Time	$V_{GS} = 0 \text{ V}$ , $I_S = 2 \text{ A}$ $dI/dt = 100 \text{ A}/\mu\text{s}$	--	200	--	ns
$Qrr$	Reverse Recovery Charge		--	0.7	--	$\mu\text{C}$


**Notes :**

- Repetitive Rating : Pulse width limited by maximum junction temperature
- $L=50\text{mH}$ ,  $I_{AS}=2\text{A}$ ,  $V_{DD}=50\text{V}$ ,  $R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$
- $I_{SD}\leq 2\text{A}$ ,  $dI/dt\leq 200\text{A}/\mu\text{s}$ ,  $V_{DD}\leq BV_{DSS}$ , Starting  $T_J=25^\circ\text{C}$
- Pulse Test : Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$
- Essentially Independent of Operating Temperature


## Typical Characteristics

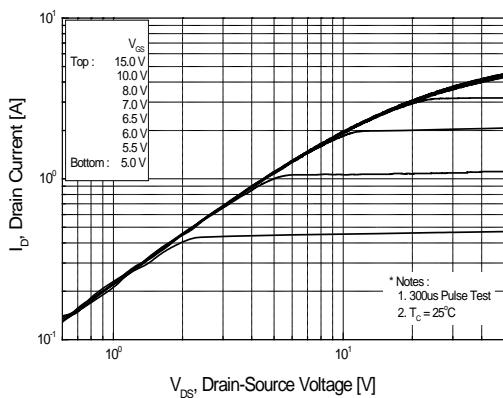


**Figure 1. On Region Characteristics**

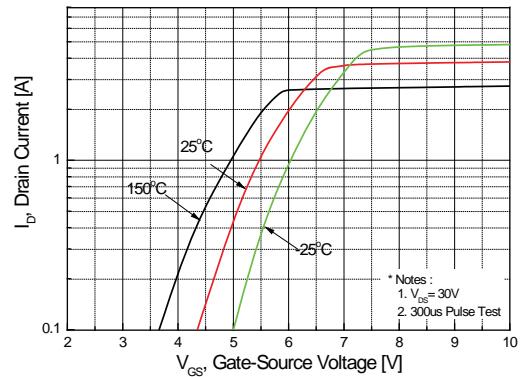


**Figure 2. Transfer Characteristics**

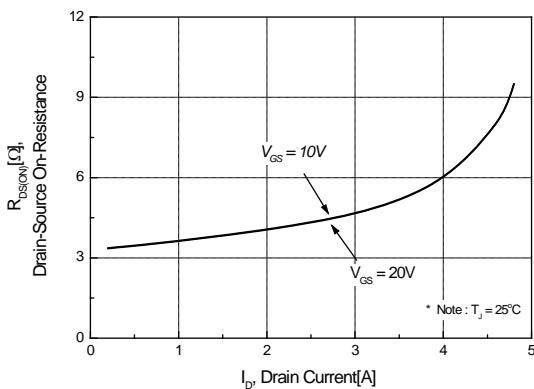


**Figure 3. On Resistance Variation vs. Drain Current and Gate Voltage**

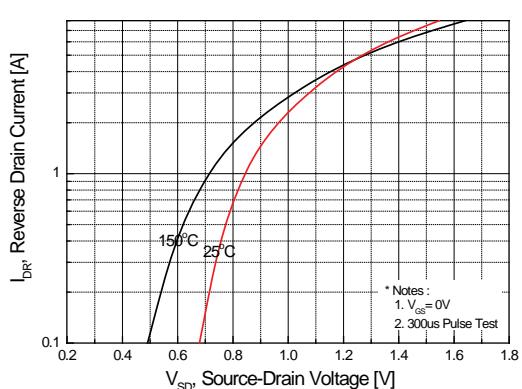

**Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature**

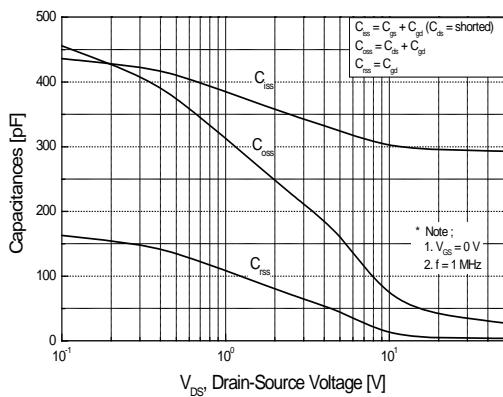

**Figure 5. Capacitance Characteristics**

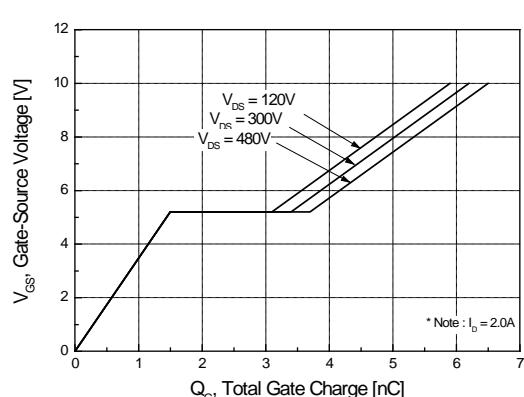

**Figure 6. Gate Charge Characteristics**

## Typical Characteristics (continued)

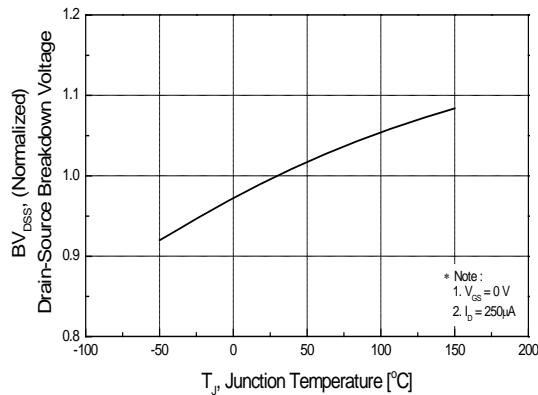


Figure 7. Breakdown Voltage Variation vs Temperature

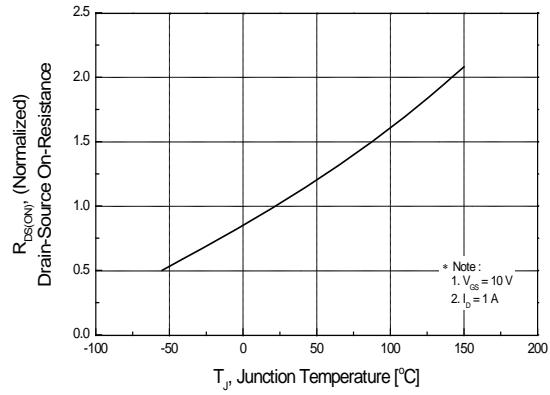


Figure 8. On-Resistance Variation vs Temperature

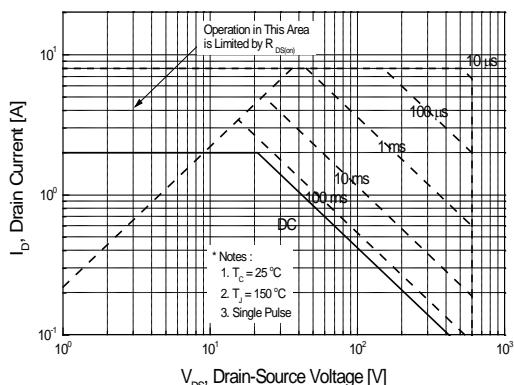


Figure 9. Maximum Safe Operating Area

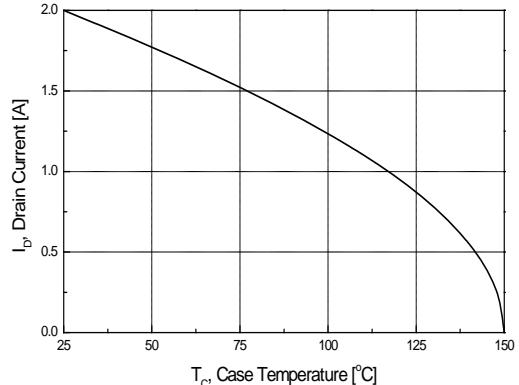


Figure 10. Maximum Drain Current vs Case Temperature

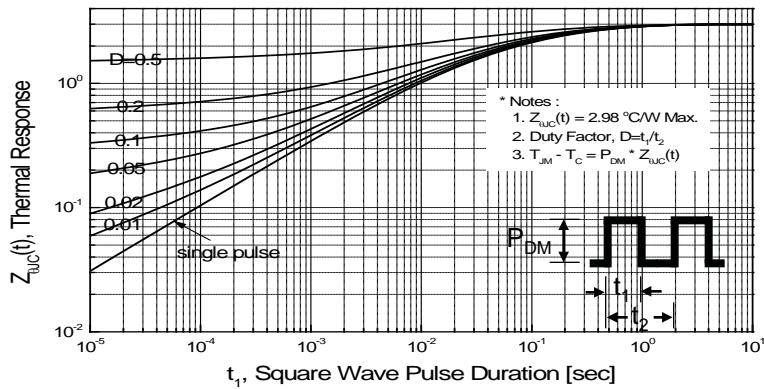


Figure 11. Transient Thermal Response Curve

Fig 12. Gate Charge Test Circuit & Waveform

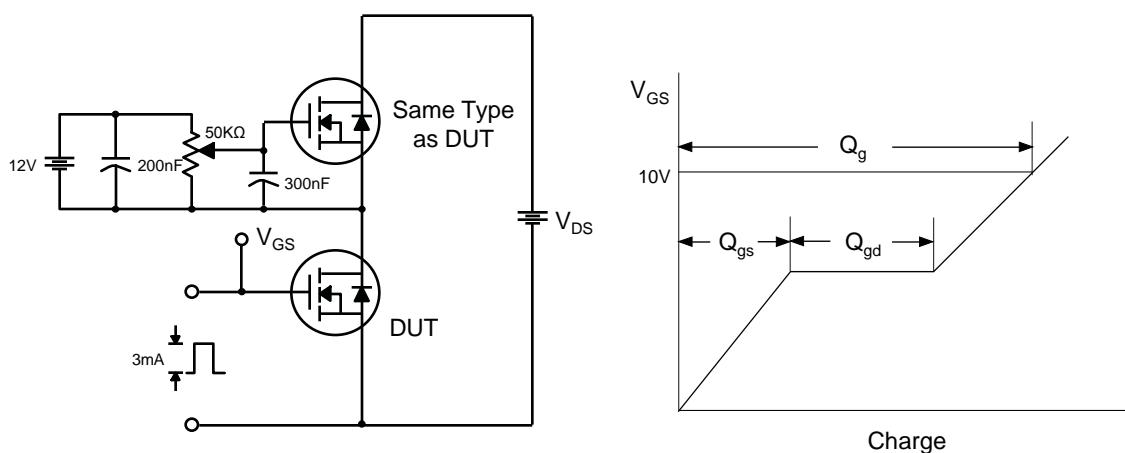


Fig 13. Resistive Switching Test Circuit & Waveforms

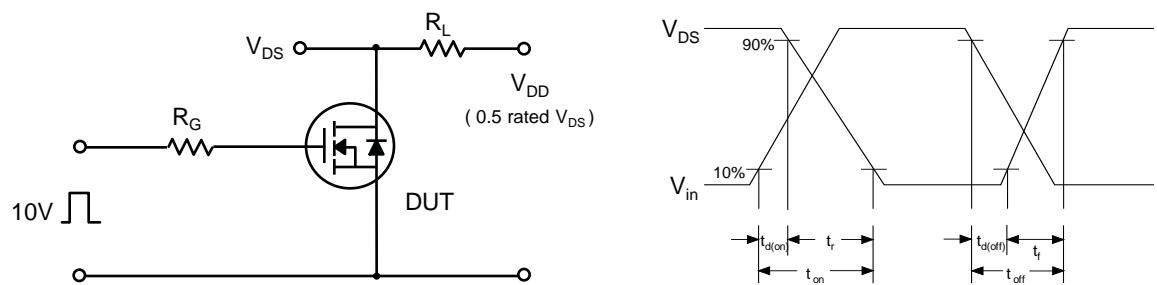


Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms





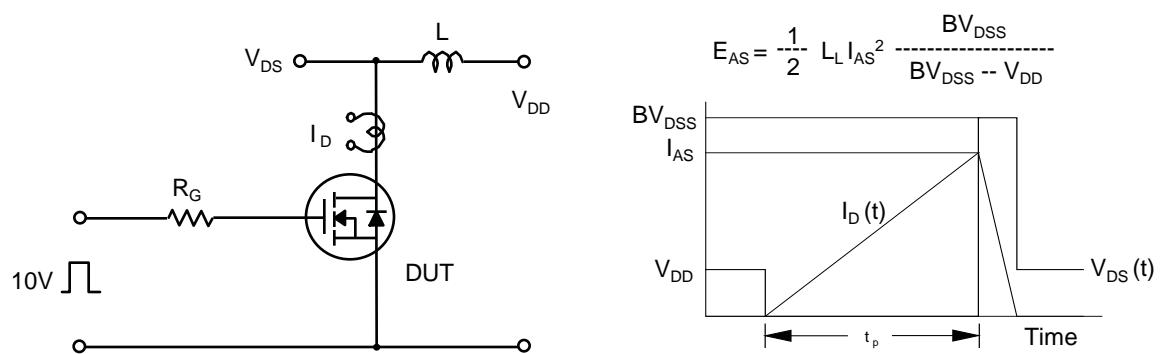


Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

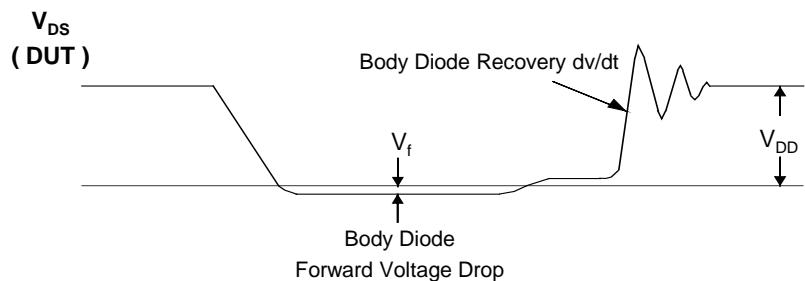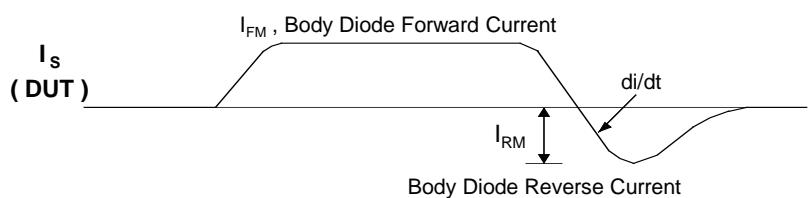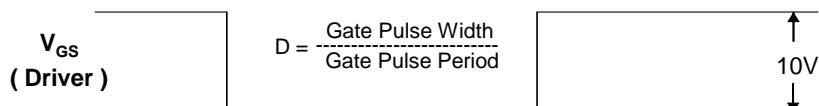

## Package Dimension

I-PAK  
(TO-251A)

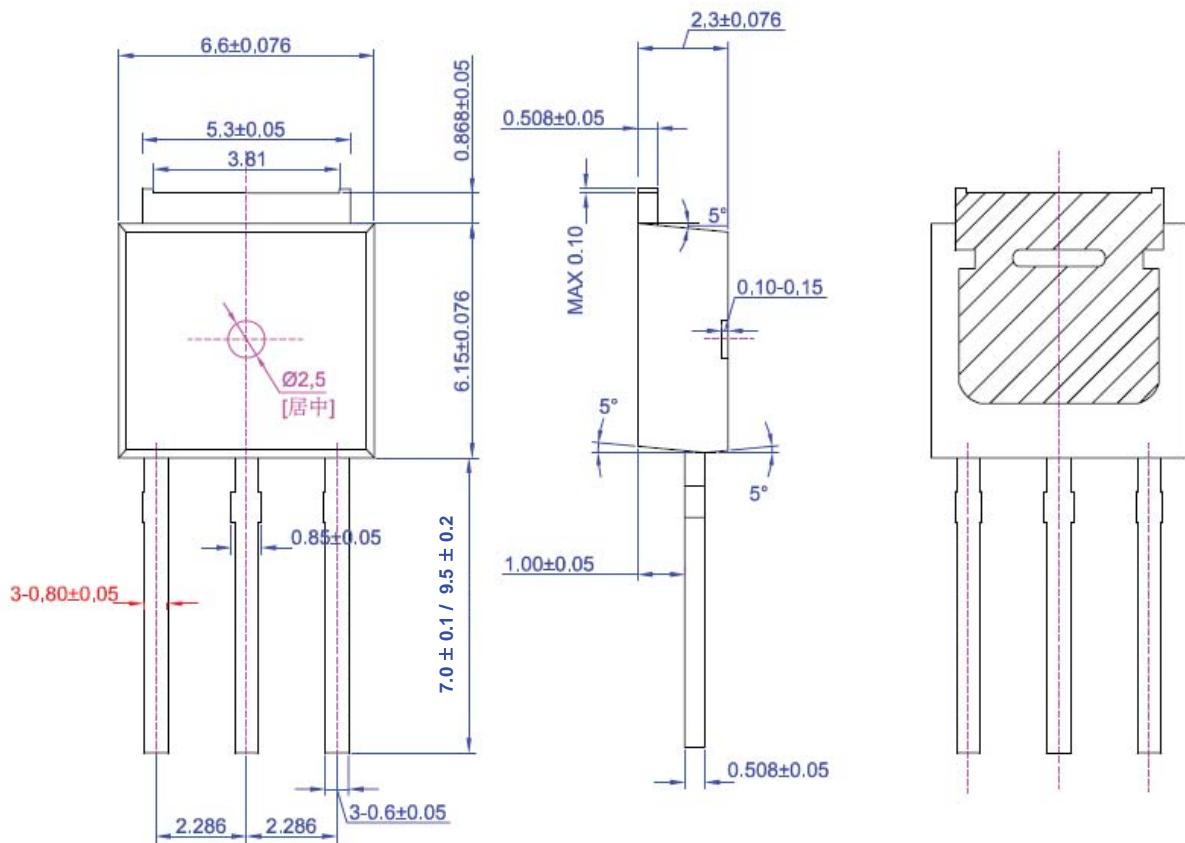

**Package Dimension**

**D-PAK  
(TO-252A)**

