



1. Mechanical Dimensions:

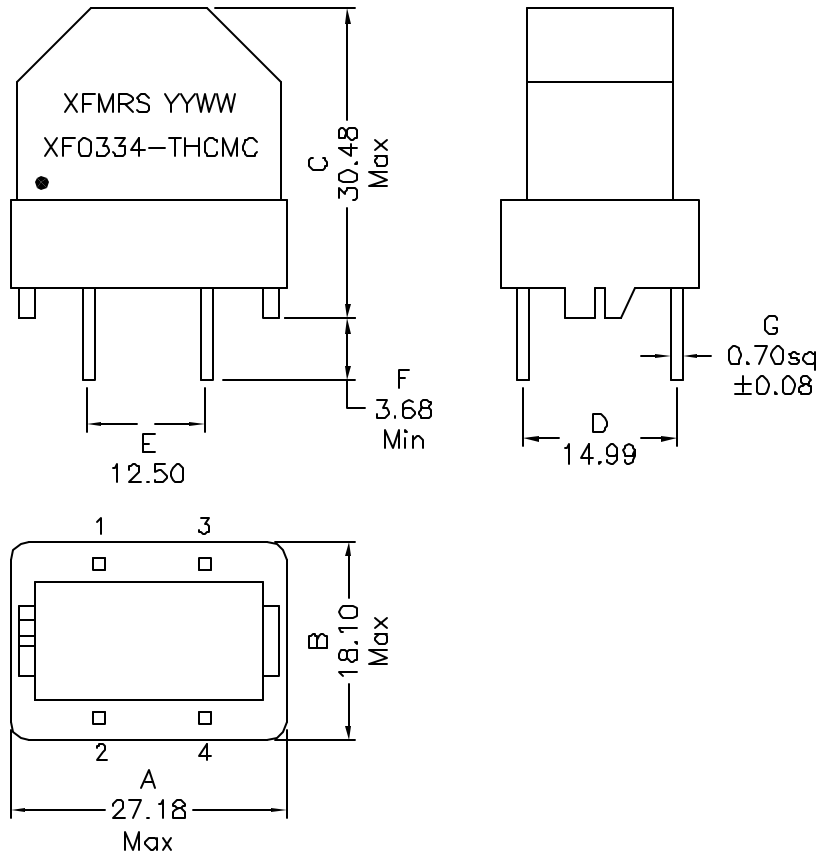

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 26%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

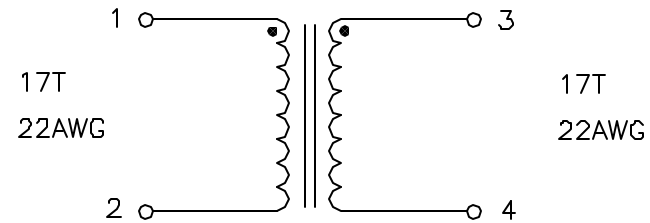

Case: Lodestone VTC 935-4

Toroid: Acme T18x10x8 10000 Perm Mat'l

3. Electrical Specifications:

OCL: 3.30mH±30% @10KHz 0.1V, Each Wdg

OCL: 1mH Min @10KHz 0.1V, Each Wdg -40°C

Q: 15 Min @10KHz 0.1V, Each Wdg

Insulated: 4.0Arms

Isolation: 1500Vac, Wdg to Wdg

DCR: 0.065 Ohms Typ Each Wdg.

DOC REV: A/2

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0334-THCMC	REV. A
SHEET 1 OF 1	DWN.	Juan Mao	Jun-04-08
	CHK.	YK Liao	Jun-04-08
	APP.	JOe Huff	Jun-04-08