


F611, Film, Metallized Polyester, Commercial Grade, 3.3 uF, 20%, 400 V, 85C, Lead Spacing = 22.5mm

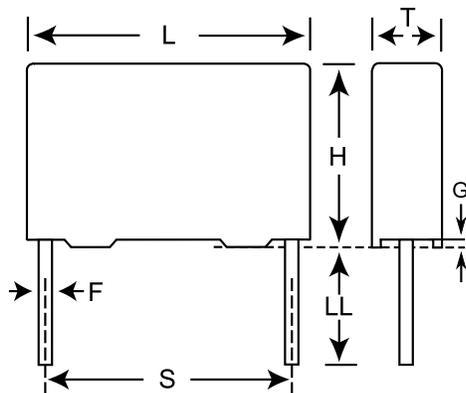

| Dimensions | |
|------------|-----------------|
| L | 26mm MAX |
| H | 22mm MAX |
| T | 13mm MAX |
| S | 22.5mm +/-0.4mm |
| LL | 17mm -1mm |
| F | 0.8mm +/-0.05mm |
| G | 0.5mm NOM |

| Packaging Specifications | |
|--------------------------|------------|
| Packaging: | Pizza, Box |
| Packaging Quantity: | 300 |

| General Information | |
|---------------------|--|
| Supplier: | KEMET |
| Series: | F611 |
| Dielectric: | Metallized Polyester |
| Style: | Radial |
| Features: | MKT (Wound), DC Multipurpose Applications |
| RoHS: | Yes |
| Lead: | Wire Leads |
| Miscellaneous: | The Rated Voltage Decreases 1.25%/C Between +85C And +105C (For +125C, Please Consult Kemet). ClimCat: 55/105/56 |

| Specifications | |
|------------------------|-------------------------|
| Capacitance: | 3.3 uF |
| Capacitance Tolerance: | 20% |
| Voltage DC: | 400 VDC, 300 VDC (105C) |
| Voltage AC: | 200 VAC |
| Temperature Range: | -55/+105C |
| Rated Temperature: | 85C |
| Dissipation Factor: | 1.2% 1kHz |
| Insulation Resistance: | 3.03 GOhms |
| Max dVdt: | 10 V |
| Inductance: | 6 nH |