


Axial Leaded Ceramic Capacitors

TP075B106K-A-B

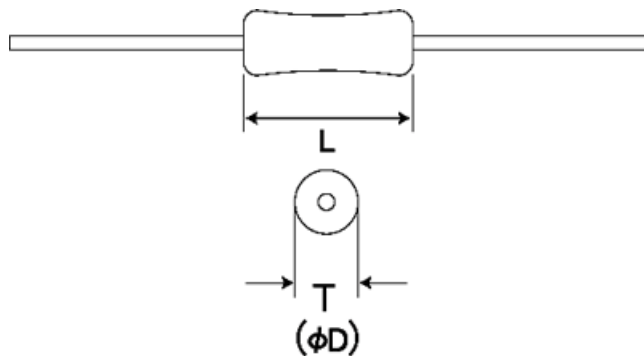

■ Features

- Item Summary
25V, 10 μ F, \pm 10%, Axial
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 2000pcs

■ Products characteristics table

External Dimensions (EIA/JIS)	Axial/Axial
Rated Voltage (max)	25V
Capacitance	10 μ F
Capacitance Tolerance	\pm 10%
Resistance	20 M Ω min.
Dielectric Loss Tangent	12.5%MAX
Temperature Characteristics (EIA/JIS)	-/B
Temperature Range (EIA/JIS)	-/-25 to +85 $^{\circ}$ C
Capacitance Change (EIA/JIS)	-/ \pm 10%
RoHS Compliance	Yes
Soldering Method	Wave

■ External Dimensions

L	4.2mm -
D	3.2mm max

2015.02.10

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.