


Gate Drive Transformer

For ON Semiconductor
NCP1652 and NCP4302

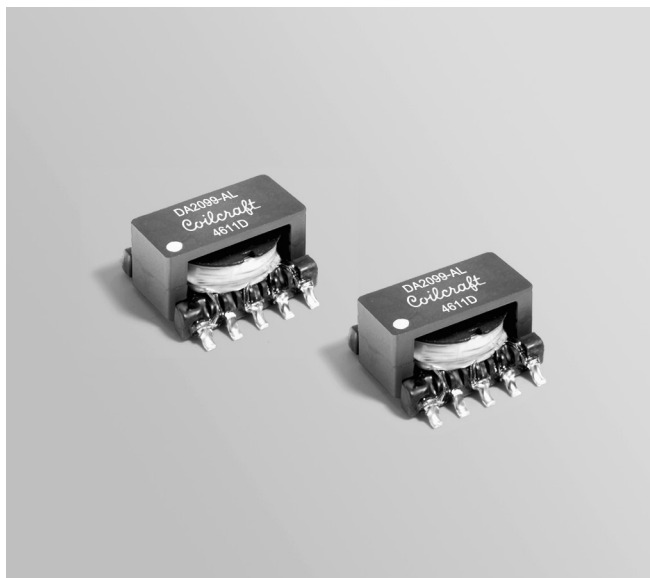

- Designed for ON Semiconductor for use with the NCP1652 PFC Controller and the NCP4302 Flyback Controller.
- Requires only 1.5 cm² of board space
- 1500 Vrms primary to secondary isolation
- Can be used from 20 kHz to 250 kHz.

Core material Ferrite

Terminations RoHS compliant tin-silver (96.5/3.5) over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 1.35 g

Ambient temperature -40°C to +125°C

Storage temperature Component: -40°C to +125°C.

Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 500/13" reel; Plastic tape: 24 mm wide, 0.36 mm thick, 20 mm pocket spacing, 6.13 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

Part number ¹	Turns ratio	Primary inductance ² ±20 % (mH)	Leakage inductance ³ max (µH)	Primary DCR max (Ohms)	Secondary DCR max (Ohms)	Volt-time product ⁴ (V-µsec)	Capacitance pri to sec ⁵ max (pF)
DA2099-AL_	1 : 1	3.79	13.0	2.30	2.85	221	13.0


1. When ordering, please specify **packaging** code:

DA2099-ALD




Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (500 per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

- Inductance measured at 100 kHz, 0.3 Vrms, 0 Adc
 - Leakage inductance measured at 100 kHz, 0.3 Vrms with secondary pins shorted.
 - Based on Bs_{at} of the core at 25°C and number of turns of the primary.
 - Capacitance measured at 100 kHz, 0.3 Vrms.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

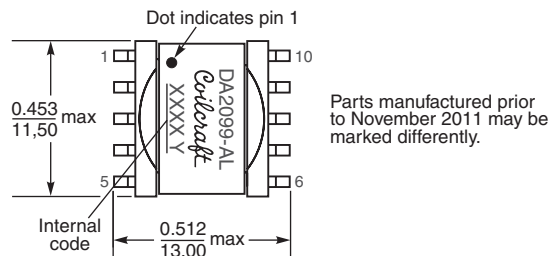

Parts manufactured prior to November 2011 may be marked differently.

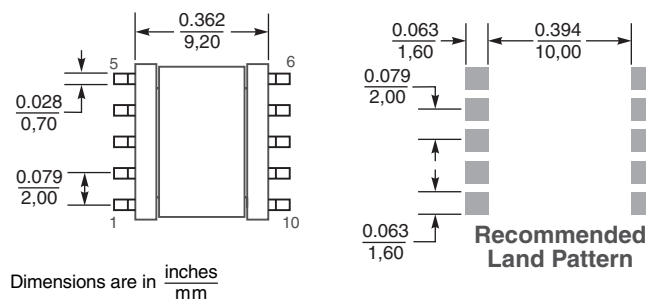

Dimensions are in inches
mm

Recommended Land Pattern



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 519 Revised 01/28/16

© Coilcraft Inc. 2016

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.