


Ceramic, 200C, MoldedHighTemp, 330 pF, 5%, 200 V, COG, High Temp, 200C, Radial Molded, Gold Termination, Industrial Grade, Lead Spacing = 5.08mm

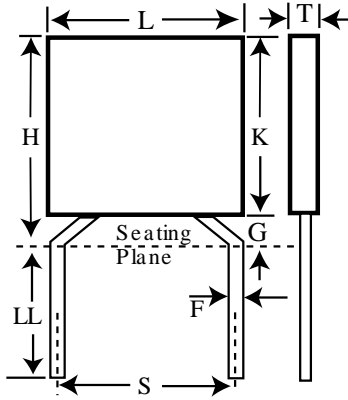

| General Information |  |
|---------------------|--|
| Style:              | Radial   |
| Series:             | MoldedHighTemp   |
| Description:        | High Temp, 200C, Radial Molded, Gold Termination, Industrial Grade |
| Features:           | Commercial   |
| RoHS:               | With Exemptions  |
| Termination:        | Gold   |
| Halogen Free:       | Yes  |

| Dimensions |                         |
|------------|-------------------------|
| L          | 4.83mm +/-0.25mm        |
| H          | 5.97mm +/-0.25mm        |
| T          | 2.29mm +/-0.25mm        |
| S          | 5.08mm +/-0.38mm        |
| LL         | 31.75mm MIN             |
| F          | 0.635mm +0.102/-0.051mm |
| G          | 1.14mm MAX              |
| K          | 4.83mm +/-0.25mm        |

| Specifications                   |                     |
|----------------------------------|---------------------|
| Capacitance:                     | 330 pF              |
| Capacitance Tolerance:           | 5%                  |
| Voltage DC:                      | 200 VDC             |
| Dielectric Withstanding Voltage: | 250 V               |
| Temperature Range:               | -55/+200C           |
| Temperature Coefficient:         | COG                 |
| Dissipation Factor:              | 2.5%                |
| Aging Rate:                      | 0% Loss/Decade Hour |
| Insulation Resistance:           | 100 GOhms           |

| Packaging Specifications |           |
|--------------------------|-----------|
| Weight:                  | 493 mg    |
| Packaging:               | Bulk, Bag |
| Packaging Quantity:      | 100       |