

HIGH CURRENT ADJUSTABLE VOLTAGE REGULATOR BL317B

DESCRIPTION


The BL317B is an adjustable 3-terminal positive voltage regulator, designed to supply more than 1.5A of output current with voltage adjustable from 1.3V ~ 37V.

FEATURES

- Output current up to 1.5A
- Output voltage adjustable from 1.3V to 37V
- Internal short circuit protection
- Internal over temperature protection
- Safe-Area compensation for output transistor

APPLICATIONS


- PC Motherboard
- LCD Monitor
- Graphic Card
- DVD Player
- Network Interface Card/Switch
- Telecom Equipment
- Printer and other Peripheral Equipment

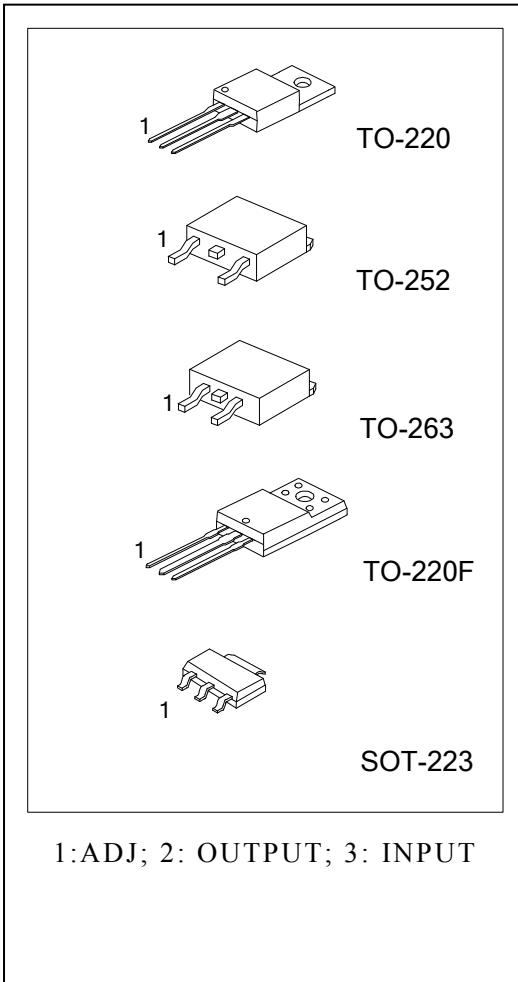

1:ADJ; 2: OUTPUT; 3: INPUT

ORDERING INFORMATION

Device	Package	Shipping
BL317BT	TO-220	Tube
BL317BF	TO-220F	Tube
BL317BY-B	TO-252	2500pcs/Reel
BL317BY-T	TO-252	80pcs/Tube
BL317BK	TO-263-2L	Reel
BL317BS	SOT-223	Reel

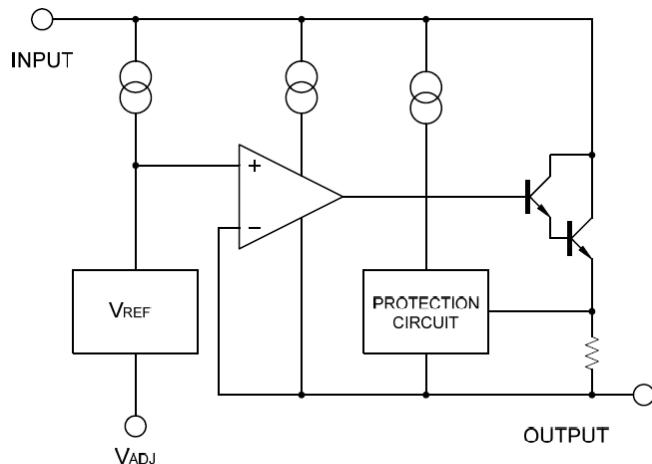BLOCK DIAGRAM

ABSOLUTE MAXIMUM RATINGS (Ta=25°C) *

Characteristic	Symbol	Min.	Max.	Unit
Input - Output Voltage Difference	Vin-Vout		40	V
Power Dissipation	Pd	Internal limited		
Operating Temperature Range	TOPR	0	125	°C
Storage temperature	T _S	-65	150	°C
Lead temperature (soldering, 10sec)	T _{LEAD}		260	°C

*: Absolute maximum ratings are stress ratings only and functional device operation is not implied. The device could be damaged beyond Absolute maximum ratings.

ELECTRICAL CHARACTERISTICS

(VI-VO=5V,0°C < Tj < 125°C, IO=500mA, IMAX=1.5A, PMAX=20W , unless otherwise specified)


Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Line Regulation	ΔV_O	Ta=25°C, 3V≤VI-VO≤40V			0.01	0.04	%/V
		Ta=0-125°C, 3V≤VI-VO≤40V			0.02	0.07	
Load Regulation	ΔV_O	Ta=25°C 10mA≤IO≤IM AX	VO≤6V VO≤5V		18 0.4	25 0.5	mV %/VO
		10mA≤IO≤IM AX Ta=0-125°C	VO≤5V VO≤6V		40 0.8	70 1.5	mV %/VO
Adjustable Pin current	IADJ				46	100	μA
Adjustable Pin Current Change	ΔIADJ	2.5V≤VI-VO≤40V, 10mA≤Io≤IMAX, PD≤PMAX			2.0	5	μA
Reference Voltage	VREF	3V≤VI-VO≤40V, 10mA≤IO≤IMAX, PD≤PMAX		1.20	1.25	1.30	V
Temperature Stability	STT				0.7		%/VO
Minimum Load Current for regulation	IL(MIN)	VI-VO=40V			3.5	10	mA
Maximum output Current	IO(MAX)	VI-VO≤15V, PD≤PMAX		1.5	2.2		A
		VI-VO≤40V, PD≤PMAX, Ta=25°C		0.15	0.4		
RMS Noise v.s. %of Vout	eN	TA=25°C, 10HZ≤f≤10KHZ			0.003	0.01	%/VO
Ripple Rejection	RR	VO=10V, f=120HZ, CADJ=0			60		dB
		VO=10V, f=120HZ, CADJ=10μ F		66	75		
Long-term Stability, TJ=THIGH	ST	TA=25°C, 1000 hr			0.3	1	%

Note: Testing with low duty pulse should be used to avoid heating effect.

THERMAL DATA

Parameter	Symbol	RATING	UNITS
Junction-to-Ambient	θ_{JA}	112	°C/W
		54	
		44	
		64	
		165	
Junction-to-Case	θ_{JC}	12	°C/W
		5	
		5	
		5	
		23	

APPLICATION CIRCUIT

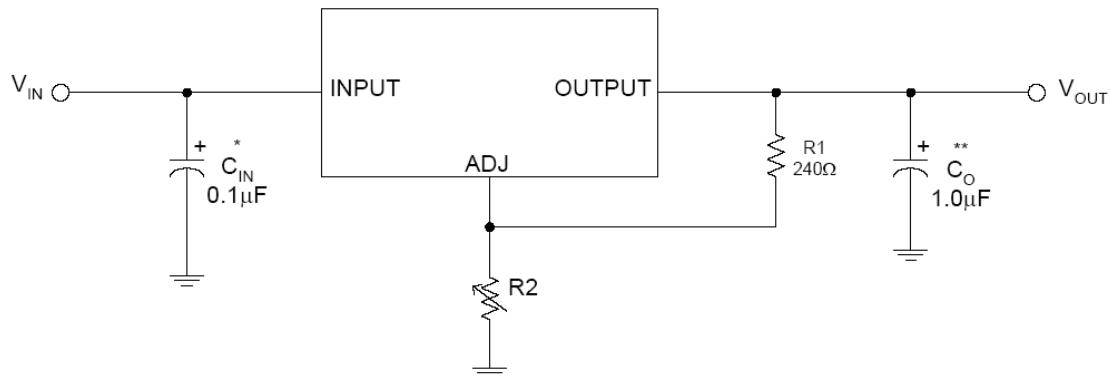

* = C_{IN} is required if the regulator is located near power supply filter.

**= C_O is needed for stability and it improves transient response.

$$V_{OUT} = V_{REF} \times (1 + R2/R1) + I_{ADJ} \times R2$$

Since I_{ADJ} is controlled to less than $100\mu A$, the error associated with this term is negligible in most applications.

CHARACTERISTICS CURVES

Fig.1. Load Regulation vs temperature

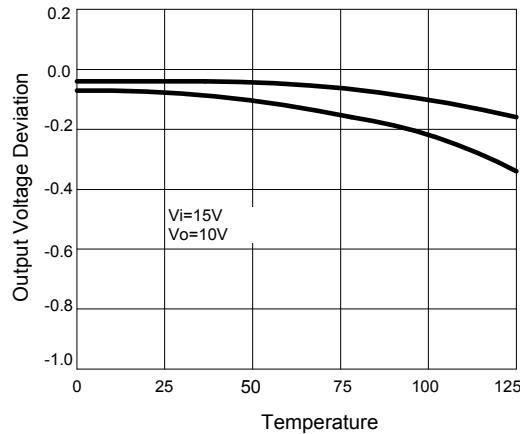


Fig.2 Adjustment Current vs Temperature

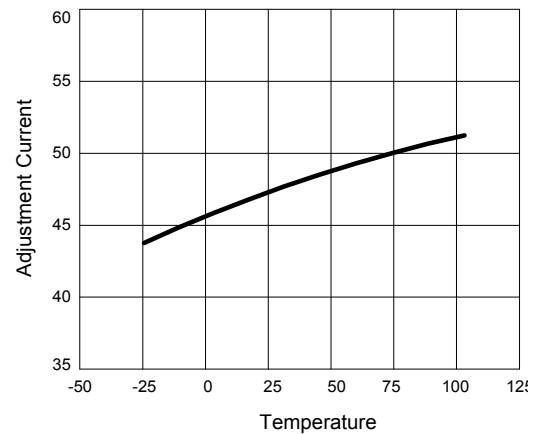


Fig.3. Dropout Voltage vs Input-Output Voltage Difference




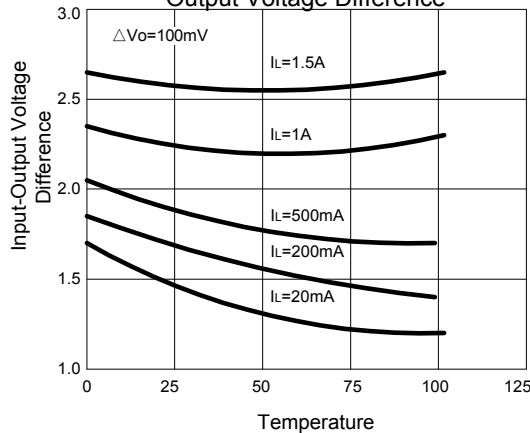


Fig.4 Reference Voltage vs Temperature

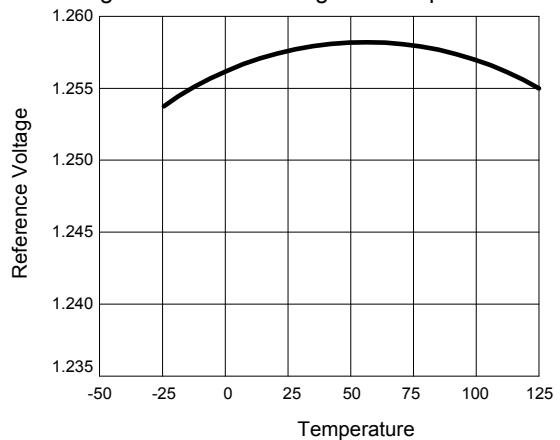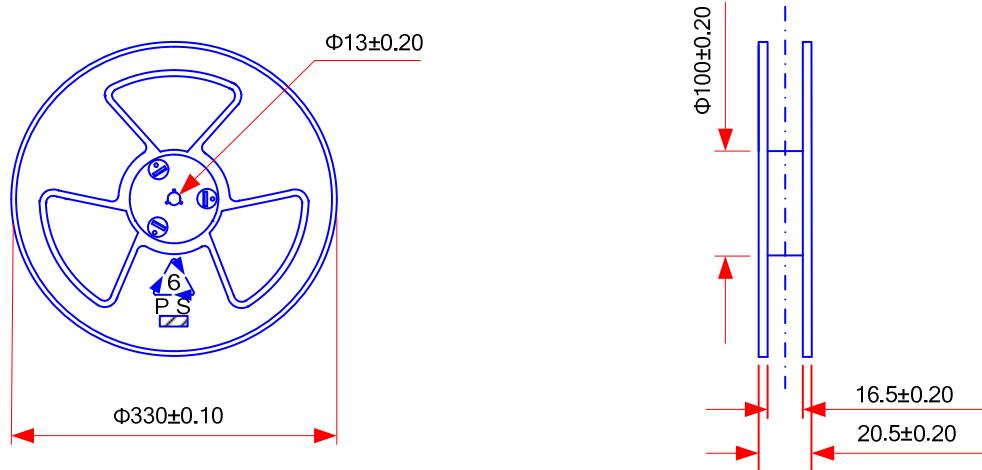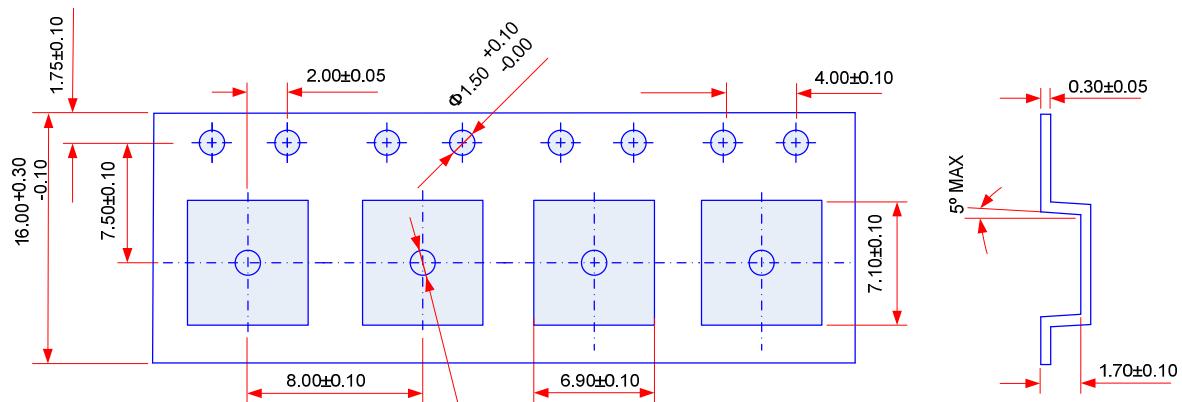


Taping reel dimension:

Taping dimension:


PACKAGE DIMENSIONS


TO-220

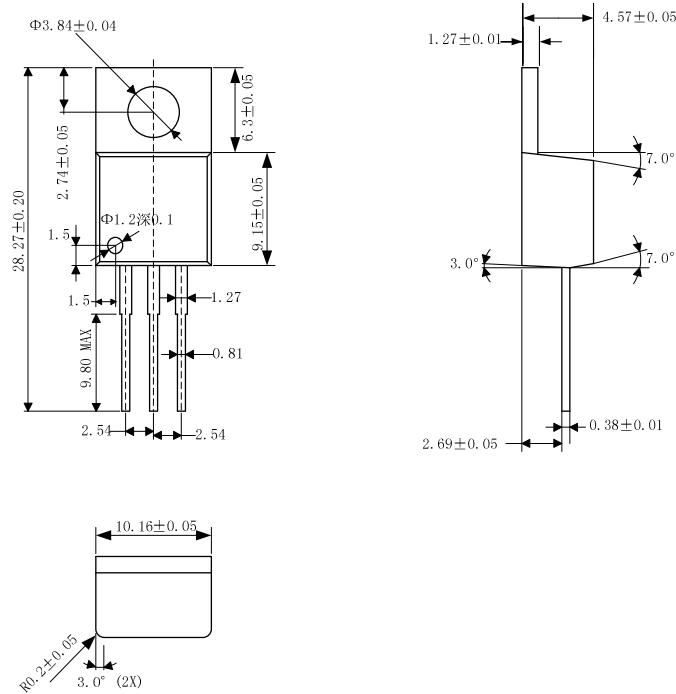Unit: mm




TO-252

Unit: mm

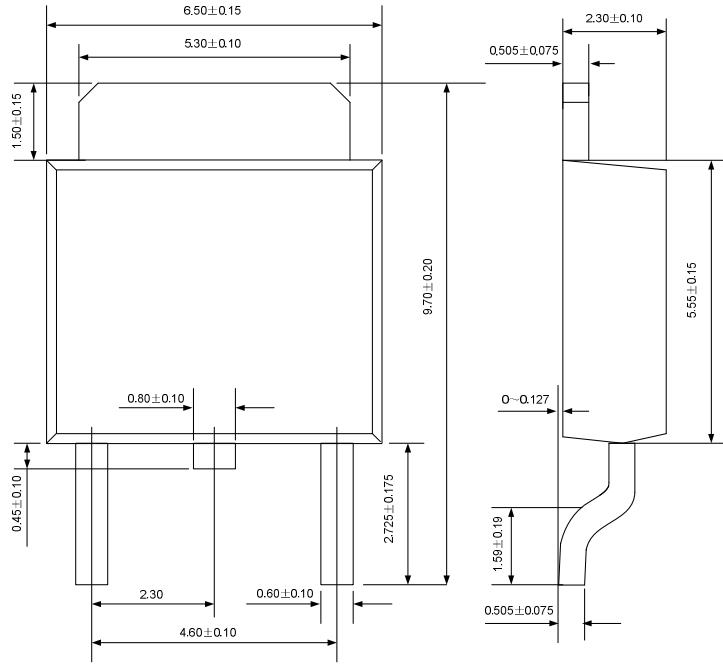

TO-263


Unit: mm

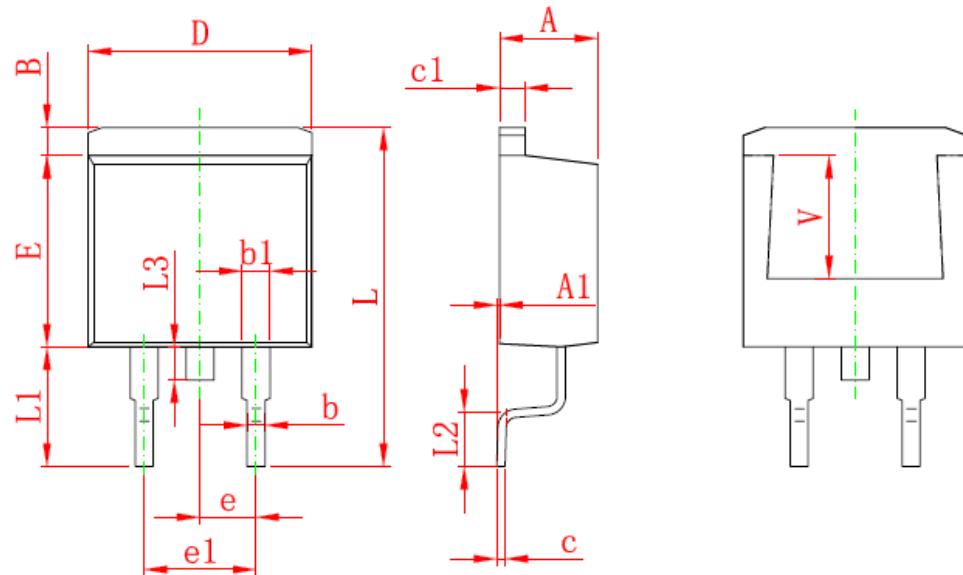

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.170	1.370	0.046	0.054
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
L	15.050	15.450	0.593	0.608
L1	5.080	5.480	0.200	0.216
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
V	5.600 REF		0.220 REF	

TO-220F

Unit: mm

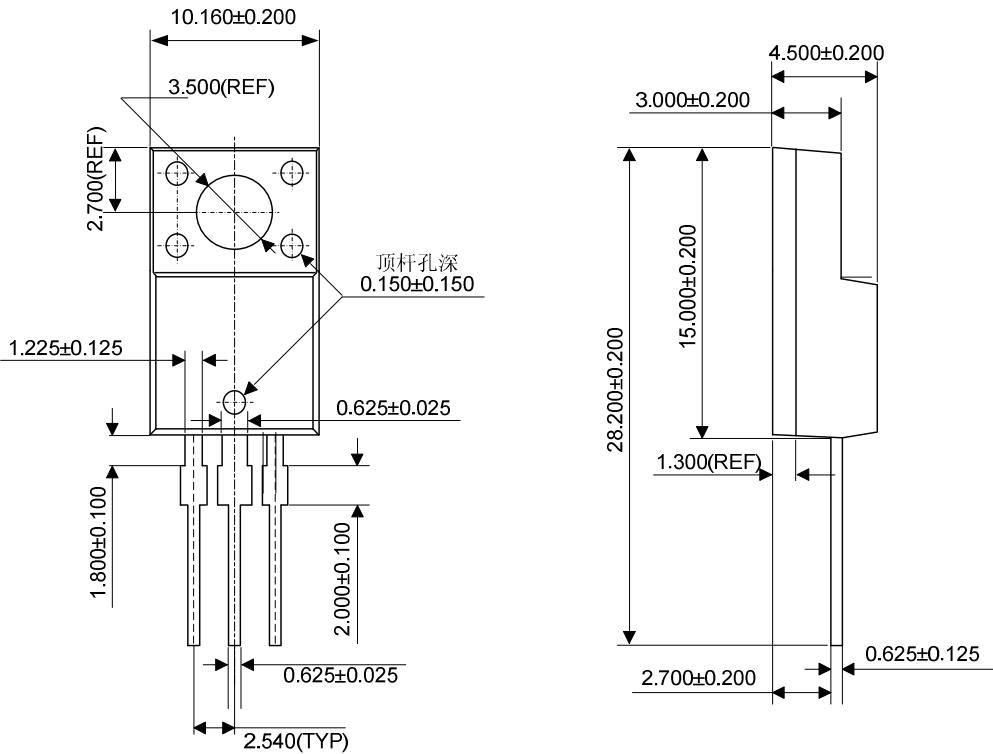

SOT-223

Unit: mm

