

SurgePOD™

Standard and Universal Surge Protective Device Modules



Universal Modules Shown

Description

Bussmann Standard and Universal SurgePOD modules are PCB-mountable for original equipment applications.

Universal modules are primarily differentiated from the Standard modules by having consistent terminal spacing dimensions on all Maximum Continuous Operating Voltage (MCOV) ratings.

This consistent terminal spacing eliminates the need for OEMs to maintain multiple PCB designs.

Standard modules have two available terminal lengths and spacing dimensions vary by MCOV rating (see Standard module dimensions for details).

When a surge condition exceeds either the Standard or Universal SPD module's MCOV, the patented Metal Oxide Varistor (MOV) technology becomes conductive to safely shunt the surge to ground.

The same MOV technology also eliminates the need for additional fusing in UL applications by safely disconnecting the SPD module upon reaching an overvoltage breakdown condition.

All Standard or Universal SPD modules are UL Recognized 1449 3rd Edition for installation in Type 1 or Type 2 surge protective devices.

Optional remote contact signaling is accomplished with a Normally Open (NO) microswitch that closes upon the module reaching an overvoltage breakdown condition.

Optional local visual indication is accomplished with indicating tabs that protrude through the device's top upon the module reaching an overvoltage breakdown condition.

Catalog symbols

- SPOD (Standard module)
- SPODU (Universal module)

Ratings

See ratings table

Agency information

- UL Recognized, 1449 3rd Edition Type 1 Surge Protective Device; E340782

Flammability rating

- UL 94V0

Terminal material

- Nickel-plated copper

Storage and operating temperature range

- -25°C to +85°C

Traceability

- Each SurgePOD SPD module is marked with a serial number for identification and tracking

Options

- Remote contact signaling is accomplished with a Normally Open (NO) microswitch that closes upon the module reaching an overvoltage breakdown condition.
- Local visual indication is accomplished with indicating tabs that protrude through the device's top upon the module reaching an overvoltage breakdown condition.

Packaging


- 200 units per master pack

Additional information

- The SurgePOD module may be damaged by excessive mechanical shock or rough handling. To ensure integrity of finished device, do NOT install any SurgePOD module that was dropped or abused during assembly.
- Suitability for final application of a SurgePOD module to be determined by the OEM.

Optional Local Visual Indication Tabs

Standard and Universal modules

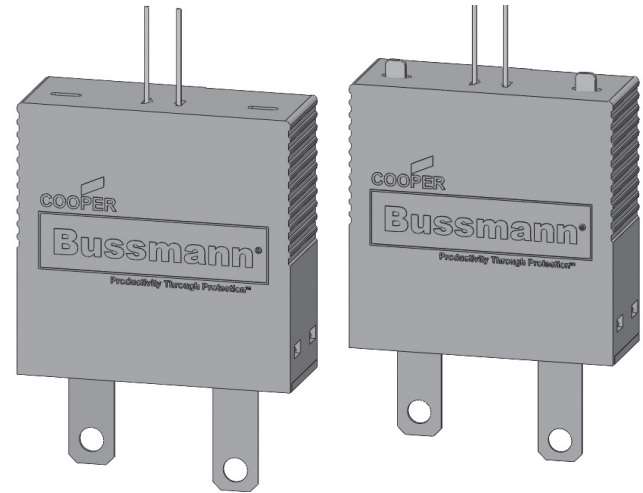


SurgePOD device under normal operation.

Local visual indication tabs exposed upon reaching an overvoltage breakdown condition.


Specifications for SurgePOD Standard and Universal Modules

Color Code	Blue	Green	Yellow	Red	Brown
Maximum Continuous Operating Voltage MCOV (V_{rms})	150V	270V	320V	420V	550V
Nominal system voltage @ 50/60Hz (V_{rms})	120V	220V	277V	347V	480V
Nominal discharge current rating 8/20 μ s (I_n)	20kA	20kA	20kA	20kA	20kA
Max discharge current rating 8/20 μ s (I_{max})	50kA	50kA	50kA	50kA	50kA
Short-Circuit Current Rating (SCCR)	200kA	200kA	200kA	200kA	200kA
Voltage Protection Rating (VPR)	600V	900V	1200V	1500V	1500V

Standard SurgePOD Module Catalog Number System

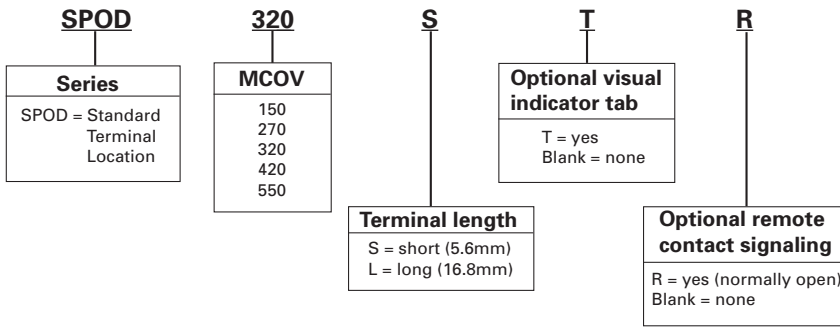


Universal SurgePOD Module Catalog Number System

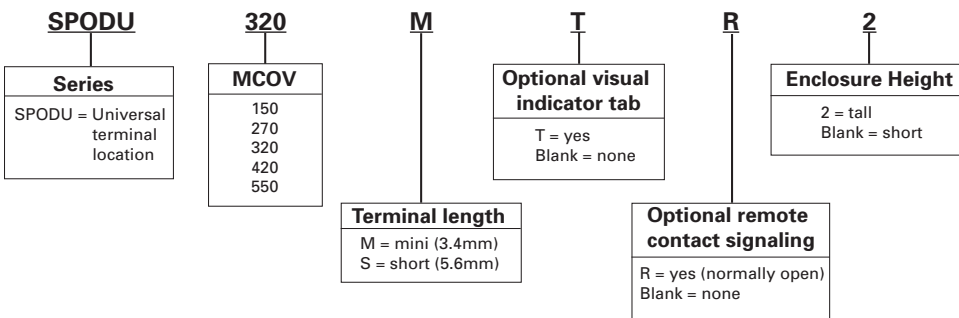


PCB Layouts

Standard & Universal terminal PCB layout

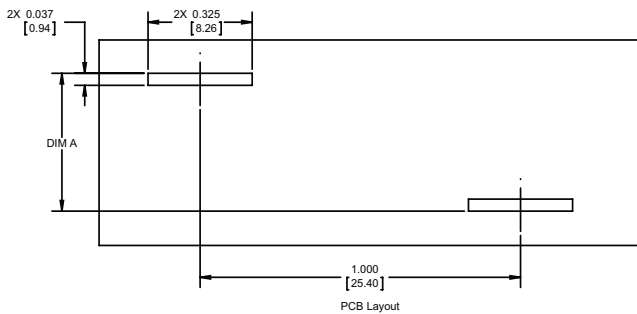


SPOD Standard microswitch terminal PCB layout

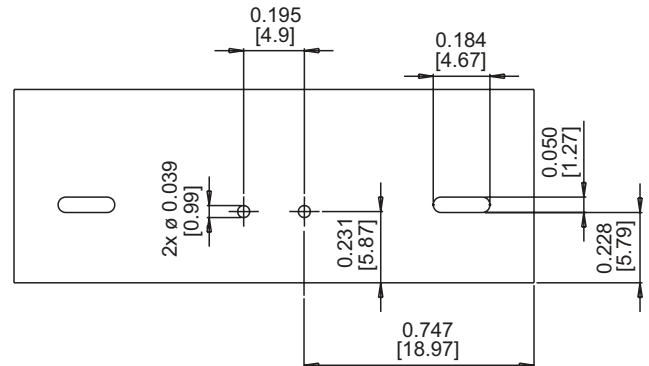

PCB "A" Dimension - in (mm)


SPOD (Standard module)		SPODU (Universal module)	
Part Number	DIM A ±0.030 (±0.76)	Part Number	DIM A ±0.030 (±0.76)
SPOD150XXX	0.339 (8.61)	SPODU150XXX	0.410 (10.42)
SPOD270XXX	0.377 (9.58)	SPODU270XXX	0.399 (10.14)
SPOD320XXX	0.377 (9.58)	SPODU320XXX	0.399 (10.14)
SPOD420XXX	0.424 (10.77)	SPODU420XXX	0.400 (10.16)
SPOD550XXX	0.425 (10.80)	SPODU550XXX	0.402 (10.21)

SPODU Universal microswitch terminal PCB layout

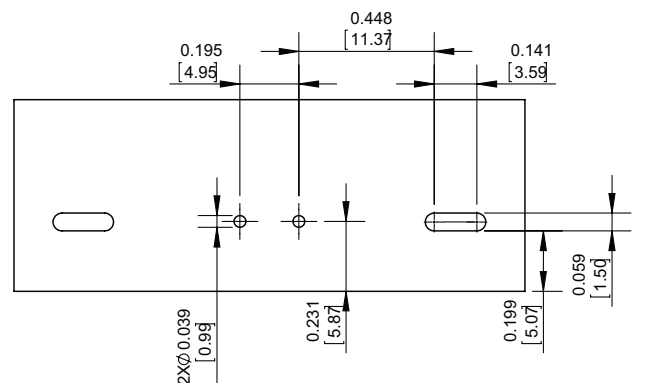


Standard module dimensions - in [mm]

Tolerance is ± 0.005" [0.13mm] unless otherwise stated.

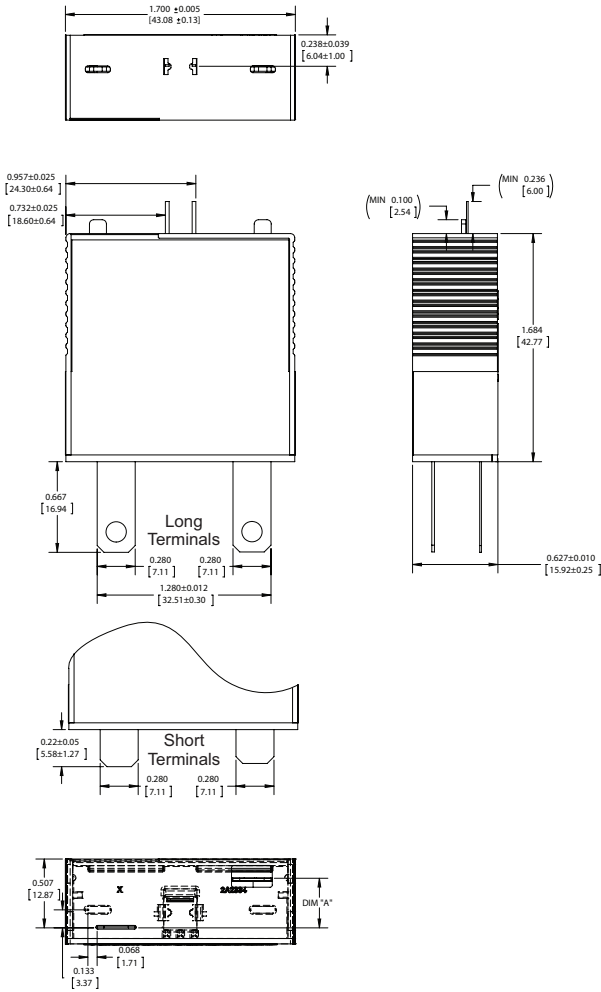

Universal module dimensions - in [mm]

Tolerance is ± 0.005" [0.13mm] unless otherwise stated.

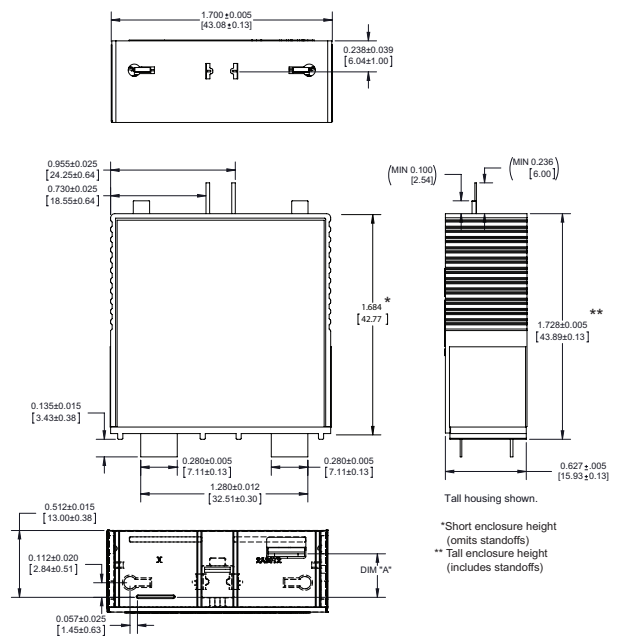

SPODU Universal lead spacing dimension A

Part Number	"A" ± 0.03 [0.76]
SPODU150XXX	0.410 [10.42]
SPODU270XXX	0.399 [10.14]
SPODU320XXX	0.399 [10.14]
SPODU420XXX	0.400 [10.16]
SPODU550XXX	0.402 [10.21]

SPOD Standard lead spacing dimension A

Part Number	"A"	
	Min	Max
SPOD150XXX	7.08	8.52
SPOD270XXX	8.01	9.51
SPOD320XXX	7.98	9.52
SPOD420XXX	9.25	10.64
SPOD550XXX	9.26	10.72

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton's Bussmann Business
114 Old State Road
Ellisville, MO 63021
United States
www.bussmann.com

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 1170 — BU-SB14228
March 2015

Eaton is a registered trademark.
All other trademarks are property of their respective owners.