

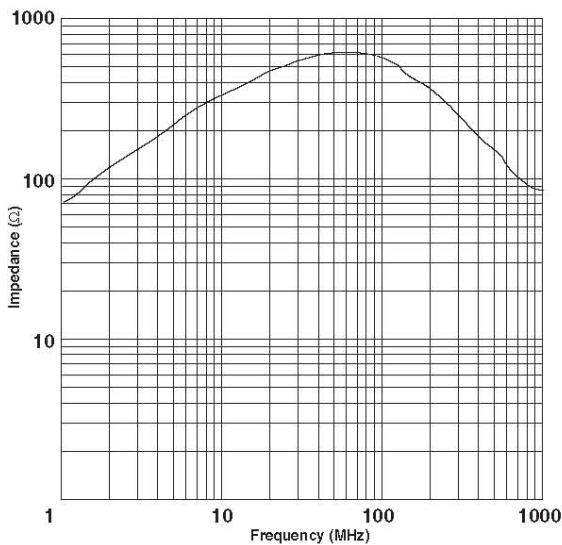


1. Mechanical Dimensions:

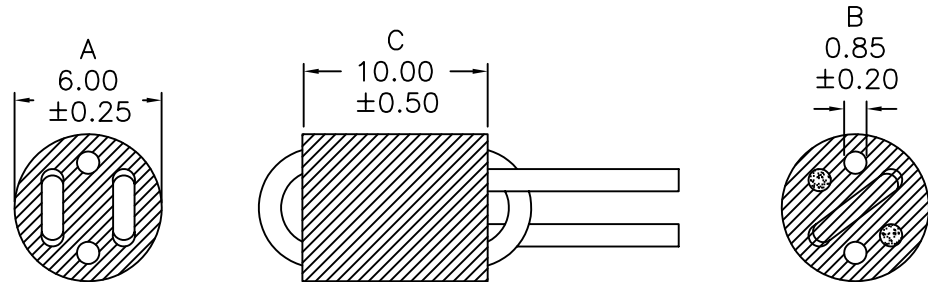

2. Schematic:



3. Electrical Specs:

DCR: tbd Ohms Max

Impedance: 510 Ohms Typ @25MHz

580 Ohms Typ @100MHz

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 150°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/1

XFMRs Inc www.XFMRs.com		Title: Wide Band Choke(R6H Type)	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XFEB20023-4B	REV A	
	DWN.	Xianyi	Apr-22-09
	CHK.	YK Liao	Apr-22-09
Scale 2.5:1 SHT 1 OF 1	APP.	BW	Apr-22-09

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.