



Total Power International, Inc.

UNIVERSAL INPUT AC-DC OPEN FRAME SINGLE & MULTI-OUTPUT 19-20 WATTS INTERNAL SWITCHING POWER SUPPLIES TPVI19 SERIES



FEATURES:

- ACCOMMODATE UNIVERSAL AC SOURCES
- COMPACT OPEN FRAME FORMAT
- MEET UNIVERSAL SAFETY STANDARDS
- EMI MEET CISPR PUB. 22 & FCC CLASS B
- CEMARKING COMPLIANCE

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Range typ. 90-264Vac.
Rating 100 to 240Vac.

Input Connector: Molex 5273(vertical).

Mating Connector: Molex 5195 or equivalent.

Input Frequency: 47-63Hz.

Inrush Current: Typ. 20A @ 230Vac.

Input Current: Typ. 0.70A @ 115Vac, 0.3A @ 230Vac.

Dielectric Withstand: Meet IEC 60950-1.

EMI: Meet CISPR PUB. 22 & FCC Class B.

Hold-up Time: Typ. 40mS @ 115Vac, 150mS @ 230Vac.

Earth Leakage: Less than 0.3mA @ 230Vac.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.

Output Current: See Ratings Chart.

Output Connector: Molex 5273 or 41671.

Mating Connector: Molex 5195 or 3069.

Output Wattage: PCB 19 watts, L-Bracket 25 watts.

Line Regulation: Typ. 0.1%.

Load Regulation: Main VO1 typ. $\pm 1-2\%$
Aux. VO2 typ. $\pm 3-5\%$ (stacked on).
Aux. VO3 typ. $\pm 2-3\%$ (P.R.).

Noise & Ripple: Typ. 1.0% peak to peak.

OVP: Built-in at Main VO1.

Adjustability: Available at Main VO1.

Overload Protection (OLP):
Fully protected against output overload and short circuit.
OLP set at about 125-150% rating output wattage.
Consult the factory for OLP setting.

GENERAL SPECIFICATION

Efficiency: Typ. 70%.

Switching Frequency: 40K Hz.

Circuit Topology: Free-running flyback circuit.

Transient Response: Output voltage returns in less than 3ms following a 25% load change.

Power Density: 1.26-1.58 Watts /Cubic Inch.

Operating Temperature: 0 to +50 °C.

Storage Temperature: -20 to +85 °C.

Temperature Coefficient: Typ. 0.04% / °C.

Cooling: Free air convection cooling.

Safety Standard: UL 60950-1/EN 60950-1 Class I.

Construction: PCB or L-Bracket format.

Note: Due to requests in market and advances in technology, specifications subject to change without notification.



For the details of safety approval, please consult the factory.



Total Power International, Inc.

OUTPUT VOLTAGE / CURRENT RATINGS CHART

SINGLE OUTPUT

MODEL NO.	MAIN VO1 @ Ⓢ		
	Typ.	Volt.	Max.
TPVI19-10	4.0A	5V	5.0A
TPVI19-10(L-B)	4.6A	5V	5.0A
TPVI19-11	1.5A	12V	1.5A
TPVI19-11(L-B)	2.0A	12V	2.5A
TPVI19-12	1.2A	15V	1.3A
TPVI19-12(L-B)	1.6A	15V	1.7A
TPVI19-13	0.8A	24V	1.0A
TPVI19-13(L-B)	1.0A	24V	

DUAL OUTPUT

MODEL NO.	MAIN VO1 @ Ⓢ			AUX. +VO2 † or -VO3 Ⓣ		
	Typ.	Volt.	Max.	Typ.	Volt.	Max.
TPVI19-20	3.0A	+5V	4.0A	0.20A	-5V	1.0A
TPVI19-20(L-B)	4.0A	+5V	5.0A	0.50A	-5V	1.0A
TPVI19-21	2.6A	+5V	3.0A	0.50A	±12V	1.0A
TPVI19-21(L-B)	4.0A	+5V	5.0A	0.50A	±12V	1.0A
TPVI19-22	2.6A	+5V	3.0A	0.40A	±15V	0.8A
TPVI19-22(L-B)	4.0A	+5V	5.0A	0.40A	±15V	0.8A
TPVI19-23	2.6A	+5V	3.0A	0.25A	+24V	0.5A
TPVI19-23(L-B)	4.0A	+5V	5.0A	0.25A	+24V	0.5A

1.2A TRIPLE OUTPUT

MODEL NO.	MAIN VO1 @ Ⓢ			AUX. VO2 †			AUX. VO3 Ⓣ		
	Typ.	Volt.	Max.	Typ.	Volt.	Max.	Typ.	Volt.	Max.
TPVI19-30	2.2A	+5V	3.0A	0.5A	+12V	1.0A	0.2A	-12V	0.5A
TPVI19-30(L-B)	3.0A	+5V	4.0A	0.5A	+12V	1.0A	0.4A	-12V	0.8A
TPVI19-31	2.0A	+5V	3.0A	0.5A	+12V	1.0A	0.2A	-5V	0.5A
TPVI19-31(L-B)	3.0A	+5V	4.0A	0.7A	+12V	1.5A	0.3A	-5V	0.6A
TPVI19-32	2.0A	+5V	3.0A	0.3A	+24V	0.5A	0.2A	-12V	0.5A
TPVI19-32(L-B)	3.0A	+5V	4.0A	0.3A	+24V	0.5A	0.3A	-12V	0.6A
TPVI19-33	2.0A	+5V	3.0A	0.3A	+15V	0.6A	0.2A	-15V	0.5A
TPVI19-33(L-B)	3.0A	+5V	4.0A	0.4A	+15V	0.8A	0.3A	-15V	0.6A

Symbol: "Ⓢ" OVP built-in. "@ " Adjustable. "†" Stacked on main O/P. "Ⓣ" Installed with Post Regulator (P.R.).


Remark: (1) At least 20% of typical main output current is required to maintain stated regulation.

(2) Max. current can't be drawn from all output at the same time.


MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: PCB 148.0g(5.2 Oz.)

L-B 223.0g(7.9 Oz.)

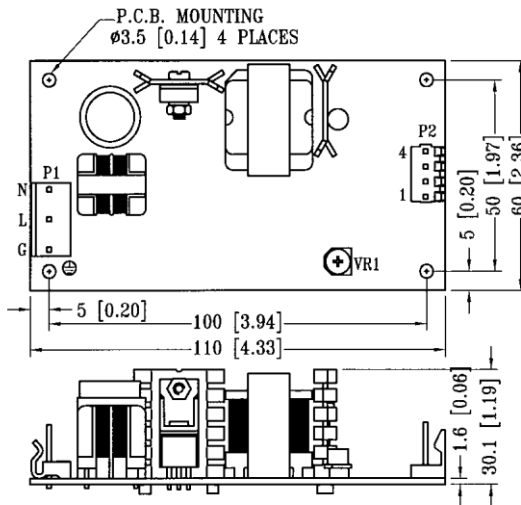

PCB FORMAT

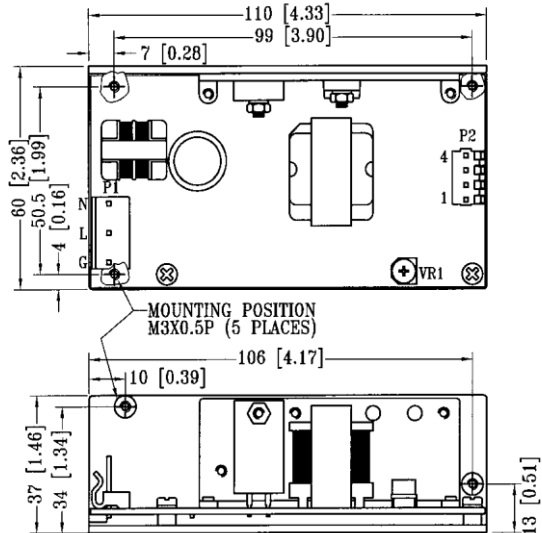

L-B FORMAT

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	AC INPUT			SINGLE		SINGLE/DUAL/TRIPLE OUTPUT			
	AC-L	AC-N	AC-G	VO1	DC COM	VO1	VO2	VO3	DC COM
CONNECTOR or PIN#	P1-L	P1-N	P1-G	P2-3,4	P2-1,2	P2-2	P2-3	P2-4	P2-1

Mating connector: P1 Molex 5195 or 5239 series.

P2 Molex 5195, 5239 or 3069 series.