

# U74AHCT32

CMOS IC


## QUADRUPLE 2-INPUT POSITIVE-OR GATES

### ■ DESCRIPTION

The **U74AHCT32** contains four independent 2-input OR gates. Each gate provides the function  $Y=A+B$  in positive logic.

### ■ FEATURES

- \* Inputs Are TTL-Voltage Compatible
- \* Low Power Dissipation
- \* Balanced Propagation Delays




SOP-14


### ■ ORDERING INFORMATION

### ■ ORDERING INFORMATION

Ordering Number	Package	Packing
U74AHCT32G-S14-R	SOP-14	Tape Reel

U74AHCT32G-S14-T  A diagram showing the breakdown of the ordering code. It has three horizontal lines. The top line is labeled '(1)Packing Type'. The middle line is labeled '(2)Package Type'. The bottom line is labeled '(3)Halogen Free'.	(1)R: Tape Reel (2)S14: SOP-14 (3)G: Halogen Free
---	---

### ■ PIN CONFIGURATION

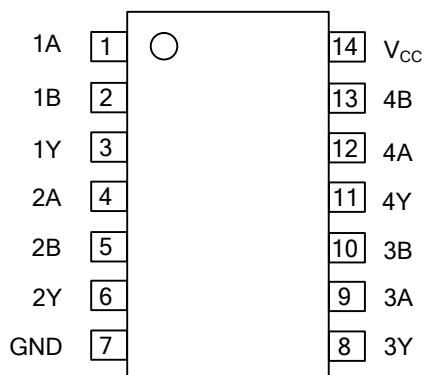


### ■ FUNCTION TABLE (Each Gate)

INPUTS A	INPUTS B	OUTPUT Y
L	L	L
L	H	H
H	L	H
H	H	H

Note: H: HIGH voltage level; L: LOW voltage level.


### ■ LOGIC SYMBOL (Positive Logic)

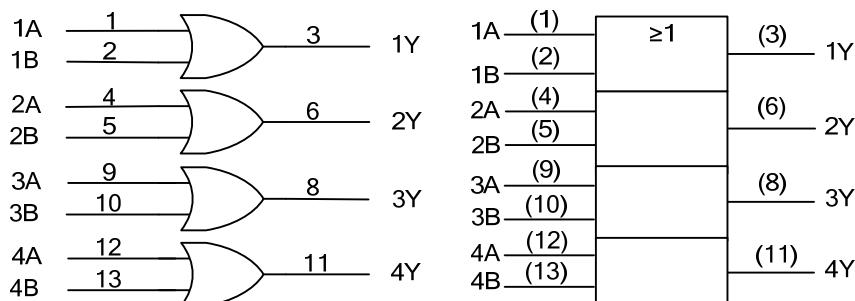

Logic symbol

IEC logic symbol

### ■ LOGIC DIAGRAM

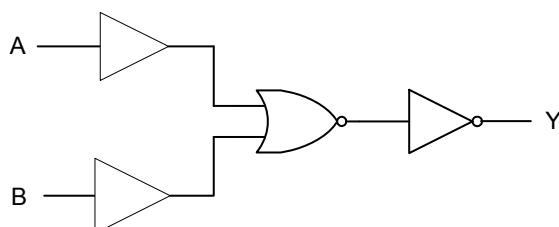

### ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sub>CC</sub>	-0.5 ~ +7	V
Input Voltage	V <sub>IN</sub>	-0.5 ~ +7	V
Output Voltage	V <sub>OUT</sub>	-0.5 ~ V <sub>CC</sub> +0.5	V
V <sub>CC</sub> or GND Current	I <sub>CC</sub>	±50	mA
Output Current (V <sub>OUT</sub> =0 ~ V <sub>CC</sub> )	I <sub>OUT</sub>	±25	mA
Input Clamping Current (V <sub>IN</sub> <-0.5V)	I <sub>IK</sub>	-20	mA
Output Clamping Current (V <sub>OUT</sub> <0 or V <sub>OUT</sub> > V <sub>CC</sub> )	I <sub>OK</sub>	±20	mA
Storage Temperature	T <sub>STG</sub>	-65 ~ + 150	°C

Note 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ <sub>JA</sub>	76	°C/W

### ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V <sub>CC</sub>		4.5	5.0	5.5	V
Input Voltage	V <sub>IN</sub>		0		5.5	V
Output Voltage	V <sub>OUT</sub>		0		V <sub>CC</sub>	V
High-Level Input Voltage	V <sub>IH</sub>	V <sub>CC</sub> =4.5V to 5.5V	2.0			V
Low-Level Input Voltage	V <sub>IL</sub>	V <sub>CC</sub> =4.5V to 5.5V			0.8	V
High-Level Input Current	I <sub>OH</sub>				-8	mA
Low-Level Input Current	I <sub>OL</sub>				8	mA
Input Transition Rise or Fall Rate	t <sub>R</sub> / t <sub>F</sub>	V <sub>CC</sub> =5.0±0.5V			20	ns/V
Ambient Operating Temperature	T <sub>OPR</sub>		-40		+85	°C

### ■ STATIC CHARACTERISTICS (T<sub>A</sub>=25°C)


PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
High-Level Output Voltage	V <sub>OH</sub>	I <sub>OH</sub> =-50μA	V <sub>CC</sub> =4.5V	4.4	4.5		V
		I <sub>OH</sub> =-8mA	V <sub>CC</sub> =4.5V	3.94			V
Low-Level Output Voltage	V <sub>OL</sub>	I <sub>OL</sub> =50μA	V <sub>CC</sub> =4.5V			0.1	V
		I <sub>OL</sub> =8mA	V <sub>CC</sub> =4.5V			0.36	V
Input Leakage Current	I <sub>II(LEAK)</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND, V <sub>CC</sub> =0V to 5.5V				±0.1	μA
Quiescent Supply Current	I <sub>Q</sub>	V <sub>IN</sub> =V <sub>CC</sub> or GND, I <sub>OUT</sub> =0, V <sub>CC</sub> =5.5V				2	μA
Additional Quiescent Supply Current Per Input Pin	ΔI <sub>Q</sub>	One input at 3.4V, other inputs at V <sub>CC</sub> or GND, I <sub>OUT</sub> =0, V <sub>CC</sub> = 5.5V				1.35	mA
Input Capacitance	C <sub>IN</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND, V <sub>CC</sub> = 5V			2	10	pF

### ■ SWITCHING CHARACTERISTICS(T<sub>A</sub>=25°C)


PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Propagation Delay, From Input(A and B) To Output(Y)	t <sub>PLH</sub> / t <sub>PHL</sub>	V <sub>CC</sub> =5±0.5 V	C <sub>L</sub> =15 pF		5	6.9	ns
			C <sub>L</sub> =50 pF		5.5	7.9	
Power Dissipation Capacitance	C <sub>PD</sub>	f =10MHz, No load			11.5		pF

■ TEST CIRCUIT AND WAVEFORMS

**Test circuit for measuring propagation delay**



**Waveforms showing the Input(A and B) to Output(Y) propagation delays**

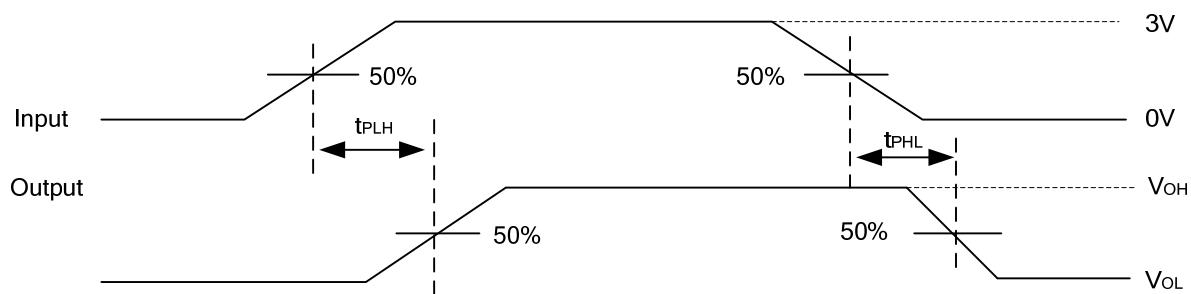

Note:  $C_L$  includes probe and jig capacitance.

All input pulses are supplied by generators having the following characteristics:  
 $PRR \leq 1\text{MHz}$ ,  $Z_0 = 50\Omega$ ,  $t_R \leq 3\text{ns}$ ,  $t_F \leq 3\text{ns}$ .

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.