


Ceramic Ball Grid Termination Arrays

CHC Series

- Superior TaNFilm® resistors on ceramic substrate
- High density networks on a reduced footprint
- Excellent high frequency performance
- Standard tolerances to $\pm 1\%$
- RoHS compliant terminations available

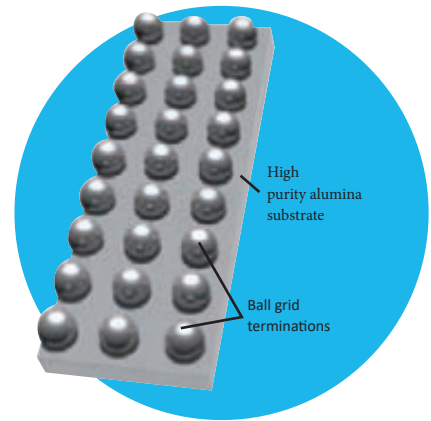

All Pb-free parts comply with EU Directive 2011/65/EU (RoHS2)

IRC's Chipscale on ceramic CHC offers high performance terminal solutions in a small surface mount package. Sn/Pb solder balls placed on a ceramic substrate permit very low parasitic inductance and capacitance. This improves speeds, lowers propagation delays, and reduces ground bounce. IRC's proven tantalum nitride thin film technology can handle the most demanding applications.

For all of your high density, small footprint termination needs, use IRC's CHC Termination arrays.

Electrical Data

Package	Resistance Range (Ω)	Absolute Tolerances	Absolute TCR	Package Power Rating 70°C*	Element Power Rating 70°C*	Operating Temperature
CB0565A	10R to 4.7K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	0.6W	0.1W	-40°C to +85°C
	10R to 10.0K	$\pm 5\%$				
CB0565B	10R to 2.2K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	0.6W		
	10R to 4.7K	$\pm 5\%$				
CD0865A	10R to 4.7K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.2W		
	10R to 10.0K	$\pm 5\%$				
CD0865B	10R to 2.2K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.2W		
	10R to 4.7K	$\pm 5\%$				
CD1065A	10R to 4.7K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.6W		
	10R to 10.0K	$\pm 5\%$				
CD1065B	10R to 2.2K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.6W		
	10R to 4.7K	$\pm 5\%$				
CC0910A	10R to 4.7K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.2W		
	10R to 10.0K	$\pm 5\%$				
CC0910B	10R to 2.2K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.2W		
	10R to 4.7K	$\pm 5\%$				
CD0910A	10R to 4.7K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.2W		
	10R to 10.0K	$\pm 5\%$				
CD0910B	10R to 2.2K	$\pm 1\%$, $\pm 2\%$	$\pm 100\text{ppm}/^\circ\text{C}$	1.2W		
	10R to 4.7K	$\pm 5\%$				


*Rated power is from 0°C to 70°C derated linearly to 0W at 85°C.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Return Loss Data (50Ω Nominal)

Average return loss for 1mm pitched bussed schematic respect to reference pin. Where reference pins are B1 to B9 referring to CC0910B schematic.

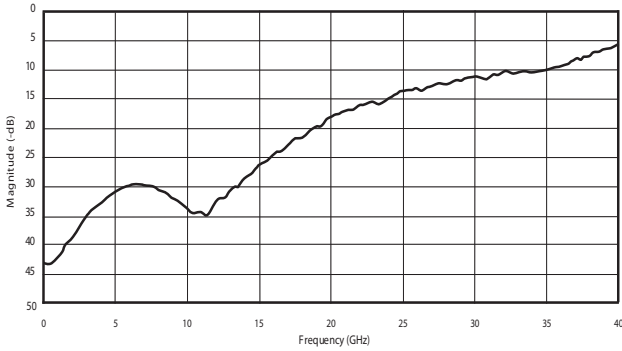


Typical Return Loss For CC0910B-01-50R0-F

Average return loss for 0.65mm pitched bussed schematic for elements away from reference pins. For example: CB0565B, reference pins are A3 or B3

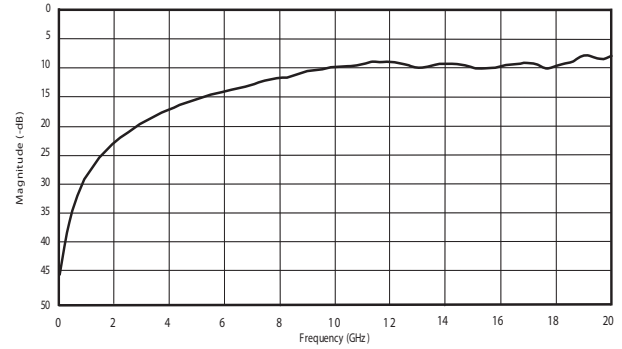


Typical Return Loss For CD1065B-01-50R0-F

Eye Diagram Data

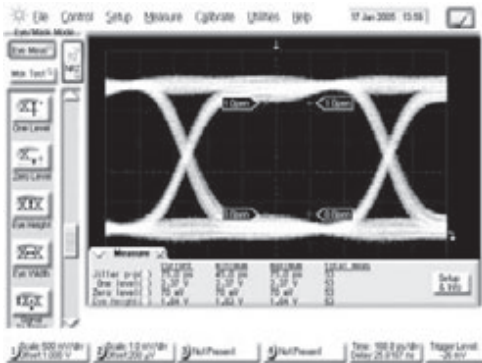


Ideal Terminator

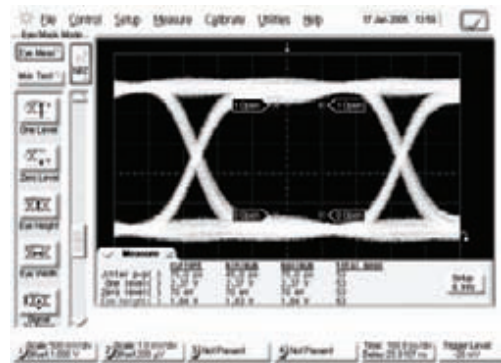


IRC CHC-CC0910B-01-50R0-F Terminator

Impedance Response Data

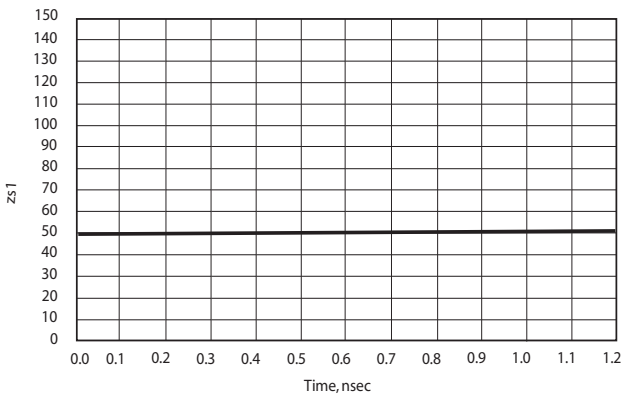

Ideal 50Ω Terminator
Impedance response to 100psec rising edge

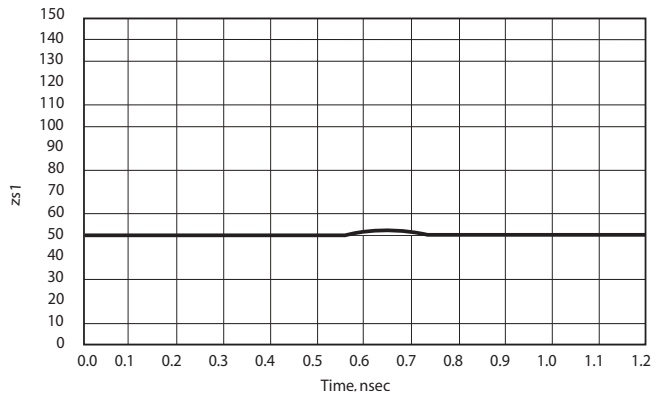

IRC CHC-CC0910B-01-50R0-F Terminator
Impedance response to 100psec rising edge


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Environmental Data

Environmental Test	Specification	Typical	Maximum
Thermal shock	MIL-PRF-83401	±0.01%	±0.02%
Low temperature operation	MIL-PRF-83401	±0.01%	±0.05%
Short time overload	MIL-PRF-83401	±0.01%	±0.05%
High temperature exposure	MIL-PRF-83401	±0.03%	±0.05%
Effects of solder	MIL-PRF-83401	±0.01%	±0.05%
Moisture resistance	MIL-STD-202, Method 206 65°C, 45% RH, with bias	±0.02%	±0.01%
Life	MIL-PRF-83401	±0.01%	±0.02%


Physical Data and Schematic Diagrams for 1.0mm Pitch Series

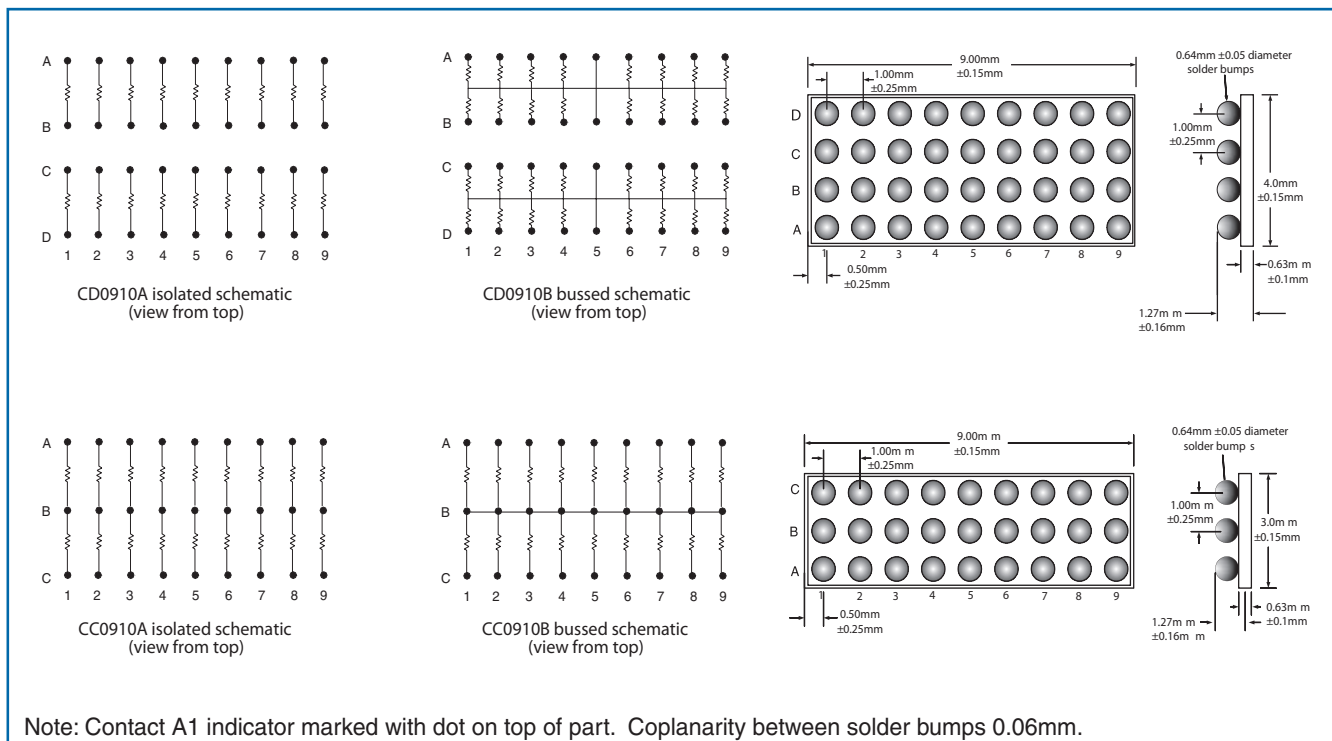

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Physical Data and Schematic Diagrams for 0.65mm Pitch Series

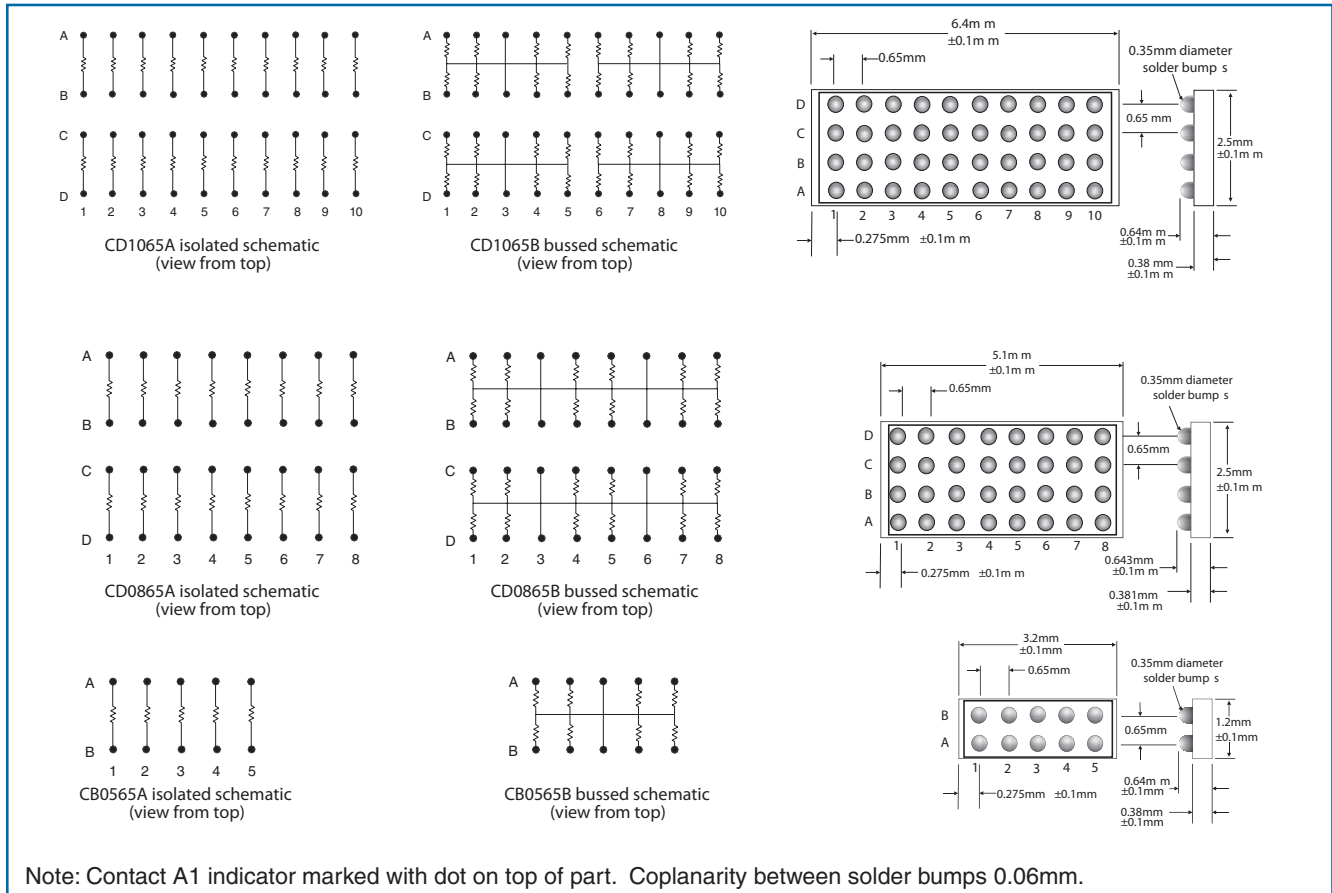

Ordering Data

Prefix **CHC** - **CD0865** **A** - **01** - **51R1** - **J**

Model
 CB0565 = 2 × 5, 0.65mm pitch array
 CD0865 = 4 × 8, 0.65mm pitch array
 CD1065 = 4 × 10, 0.65mm pitch array
 CC0910 = 3 × 9, 1.0mm pitch array
 CD0910 = 4 × 9, 1.0mm pitch array

Schematic
 A = Isolated schematic with 60/40 Sn/Pb (0.65mm pitch) or 90/10 Pb/Sn (1.0mm pitch) terminations
 ALF = Isolated schematic with RoHS compliant terminations
 B = Bussed schematic with 60/40 Sn/Pb (0.65mm pitch) or 90/10 Pb/Sn (1.0mm pitch) terminations
 BLF = Bussed schematic with RoHS compliant terminations

Absolute TCR Code
 01 = ±100ppm/°C

Four Digit Resistance Code
 Standard resistance values
 10R0 = 10Ω; 15R0 = 15Ω; 22R0 = 22Ω; 33R0 = 33Ω; 47R0 = 47Ω; 50R0 = 50Ω; 51R1 = 51.1Ω;
 75R0 = 75Ω; 1000 = 100Ω; 1001 = 1.00KΩ; 1002 = 10.0KΩ; 2201 = 2.20KΩ; 4701 = 4.70KΩ

Absolute Tolerance Code
 J = ±5%; G = ±2%; F = ±1%

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
 All information is subject to TT Electronics' own data and is considered accurate at time of going to print.