



Digital Attenuator, 30 dB, 4-Bit DC - 2 GHz

AT-220

V3.00

Features


- Attenuation 2-dB Steps to 30 dB
- High Accuracy +/-3%
- Temperature Stability +/-0.15 dB from -40°C to +85°C
- Low Intermodulation Product: +50 dBm IP₃
- Low DC Power Consumption: 50 mW
- Low Cost SOIC 16 Lead Plastic Package
- Tape and Reel Packaging Available¹

Description

M/A-COM's AT-220 is a 4-bit, 2-dB step GaAs MMIC digital attenuator in a low cost SOIC 16-lead surface mount plastic package. The AT-220 is ideally suited for use where high accuracy, fast switching, very low power consumption and low intermodulation products are required. Typical applications include radio and cellular equipment, wireless LANs, GPS equipment and other Gain/Level Control circuits.

The AT-220 is fabricated with a monolithic GaAs MMIC using a mature 1-micron process. The process features full chip passivation for increased performance and reliability.

SO-16

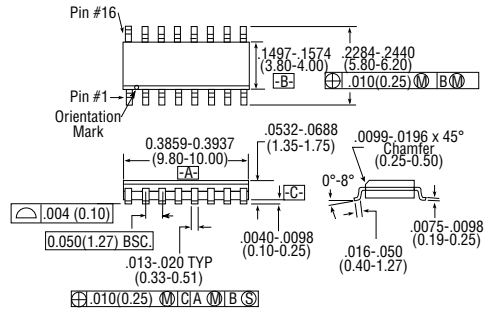

16-Lead SOP outline dimensions
Narrow body .150
(All dimensions per JEDEC No. MS-012-AC, Issue C)
Dimensions in () are in mm.
Unless Otherwise Noted: .xxx = ± 0.010 (.xx = ± 0.25)
.xx = ± 0.02 (.x = ± 0.5)

Ordering Information

| Part Number | Package |
|-------------|------------------------------|
| AT-220 PIN | SOIC 16-Lead Plastic Package |
| AT-220TR | Forward Tape & Reel |
| AT-220RTR | Reverse Tape & Reel |

Electrical Specifications, T_A = 25°C

| Parameter | Test Conditions ² | Unit | Min. | Typ. | Max |
|---|--|------|--|-------|-----|
| Reference Insertion Loss | DC - 0.1 GHz | dB | | 1.2 | 1.4 |
| | DC - 0.1 GHz | dB | | 1.5 | 1.7 |
| | DC - 1.0 GHz | dB | | 1.6 | 1.8 |
| | DC - 2.0 GHz | dB | | 1.8 | 2.1 |
| Attenuation Accuracy ³ | DC - 1.0 GHz DC - 2.0 GHz | dB | ±(0.15 dB + 3% of Attenuation Setting in dB) ±(0.30 dB + 3% of Attenuation Setting in dB) | | |
| VSWR | | | | 1.2:1 | |
| Trise, Tfall Ton, Toff Transients | 10% to 90% RF, 90% to 10% RF | nS | | 12 | |
| | 50% Control to 90% RF, 50% Control to 10% RF | nS | | 18 | |
| | In Band | mV | | 25 | |
| 1 dB Compression | Input Power | dBm | | 20 | |
| | Input Power | dBm | | 28 | |
| IP ₂ | Measured Relative to Input Power | dBm | | 45 | |
| | (For two-tone Input Power Up to +5 dBm) | dBm | | 68 | |
| IP ₃ | Measured Relative to Input Power | dBm | | 40 | |
| | (For two-tone Input Power Up to +5 dBm) | dBm | | 50 | |

1. Refer to "Tape and Reel Packaging" Section, or contact factory.
2. All measurements at 1 GHz in a 50Ω system, unless otherwise specified.
3. Attenuation accuracy specifications apply with negative bias control and low inductance grounding.

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

1

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 3 3263 8761 ■ Europe: Tel. +44 (1344) 869 595
Fax (800) 618-8883 Fax +81 3 3263 8769 Fax +44 (1344) 300 020

Digital Attenuator, 30 dB, 4-Bit

AT-220


V3.00

Absolute Maximum Ratings¹

| Parameter | Absolute Maximum |
|-----------------------|------------------|
| Max. Input Power | +27 dBm |
| 50 MHz | +34 dBm |
| 500-2000 MHz | +5V, -8.5V |
| Control Voltage | -40°C to +85°C |
| Operating Temperature | -65°C to +150°C |
| Storage Temperature | |

1. Operation of this device above any one of these parameters may cause permanent damage.

Functional Schematic

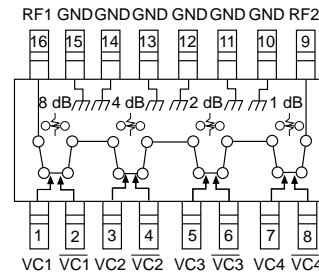

Pin Configuration





| Pin | Description | Pin No. | Description |
|-----|------------------|---------|-------------|
| 1 | VC1 | 9 | RF2 |
| 2 | $\overline{VC1}$ | 10 | GND |
| 3 | VC2 | 11 | GND |
| 4 | $\overline{VC2}$ | 12 | GND |
| 5 | VC3 | 13 | GND |
| 6 | $\overline{VC3}$ | 14 | GND |
| 7 | VC4 | 15 | GND |
| 8 | VC4 | 16 | RF1 |

Truth Table

| Control Inputs | | | | | | | | Attenuation (dB) |
|------------------|-----|------------------|-----|------------------|-----|------------------|-----|------------------|
| $\overline{VC4}$ | VC4 | $\overline{VC3}$ | VC3 | $\overline{VC2}$ | VC2 | $\overline{VC1}$ | VC1 | |
| 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | Reference |
| 0 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 2 dB |
| 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 4 dB |
| 1 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 8 dB |
| 1 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 16 dB |
| 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 30 dB |

"0" = Vin Low, Vin Low = 0V, "1" = Vin High, Vin High = -5V
 "0" = 0 to -0.2V @ 20µA Max
 "1" = -5V @ 10 µA typ to -8V @ 200 µA Max

Typical Performance

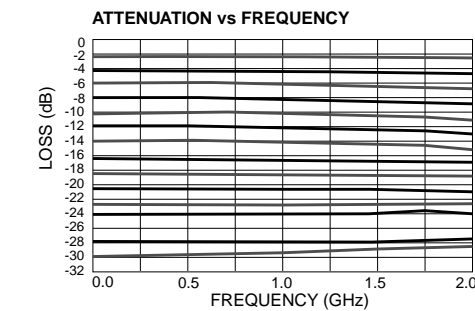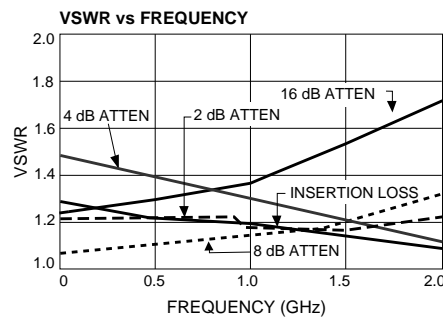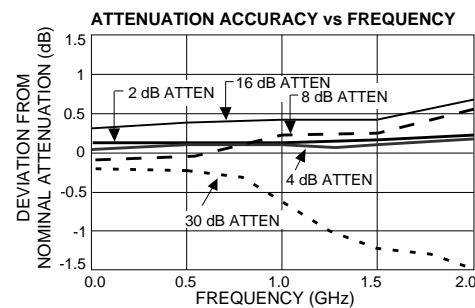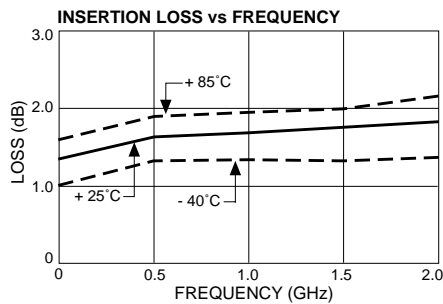

2

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
 Fax (800) 618-8883

Asia/Pacific: Tel. +81 3 3263 8761
 Fax +81 3 3263 8769

Europe: Tel. +44 (1344) 869 595
 Fax +44 (1344) 300 020

