

Two Great Forces in the 8-bit Realm

78K0S

Compact yet powerful 8-bit MCUs

78K0 new

Superior speed, memory and functionality

Empower your creativity

78K
Embedded Controller

78K0S
and
78K0 new
families

**NEC will continue to provide
the following benefits**

Future-proof cost-performance

**Low power consumption
(one of the best of W/W vendors)**

**Smooth migration lineup and future's Roadmap
(new concept Kxx family in schedule)**

**By using the industry's most
advanced technology and
having market-oriented ideas**

78K0S

Ideal for upgrading from 4- to 8-bits

- Easy upgrade to our 78K0 family
- Best fit for compact applications, such as car accessories, remote controls, home appliances and PC peripherals
- Wide range of LCD-control functions such as power-on-reset, voltage booster and A/D converter
- On-chip flash memory versions
- Speed up current CORE from 4Q/01(5MHz→10MHz^{*1})

※1 D78907x/10xA/11xA/16x/17x

78K0 new

Enhanced performance for consumer and automotive electronics


- Enhanced version of our best-selling 78K0 family
- Higher speed than 78K0(8.38MHz→12MHz^{*2})
- Ideal choice for consumer electronics, automotive use and other 8-bit applications
- Various ASSPs available: built-in functions include automotive bus, 10bit timer for inverter motor control
- On-chip flash memory versions
- Next generation 78K0/Kxx family in schedule

※2 D78002xA/003xA/007x/098x

MCU Features

	75X/75XL	78K0S	78K0	78K0 new
CPU	4-bit	8-bit	8-bit	8-bit
ROM	Internal ROM+RAM	Internal ROM+RAM	Internal ROM+RAM	Internal ROM+RAM
RAM	64K bytes(max)	64K bytes(max)	64K bytes(max)	64K bytes(max)
Multiplier	—	Hardware option	8×8=16 by inst.	8×8=16 by inst.
Instruction Cycle	0.96/0.67μs	0.4/0.2μs	0.4μs	0.24/0.17μs
Power Supply	2.7/1.8 to 5.5V	1.8 to 5.5V	1.8 to 5.5V	1.8 to 5.5V
C-language Compiler	—	○	○	○

Overview

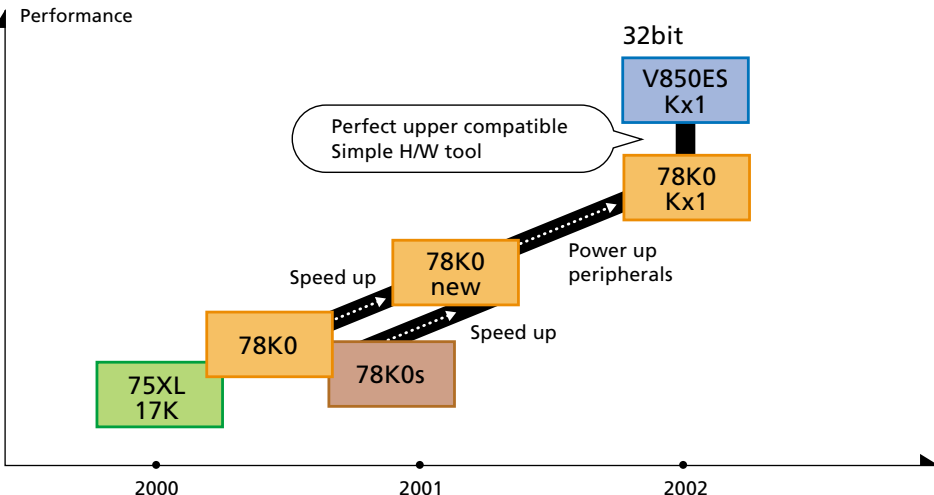

78K0/Kx1 series K1 family

Brushed up peripherals POR/LVI

■ Unique and powerful reset functions

- Brown-out detect and reset
- Reset output for external ICs
- Fast start-up and watchdog by on-chip Ring oscillator


■ Power up serial I/O

- LIN-Bus on-chip(using special UART)

■ Higher speed, Lower EMI noise

- 10MHz, less than 70dBm(target)

Road map

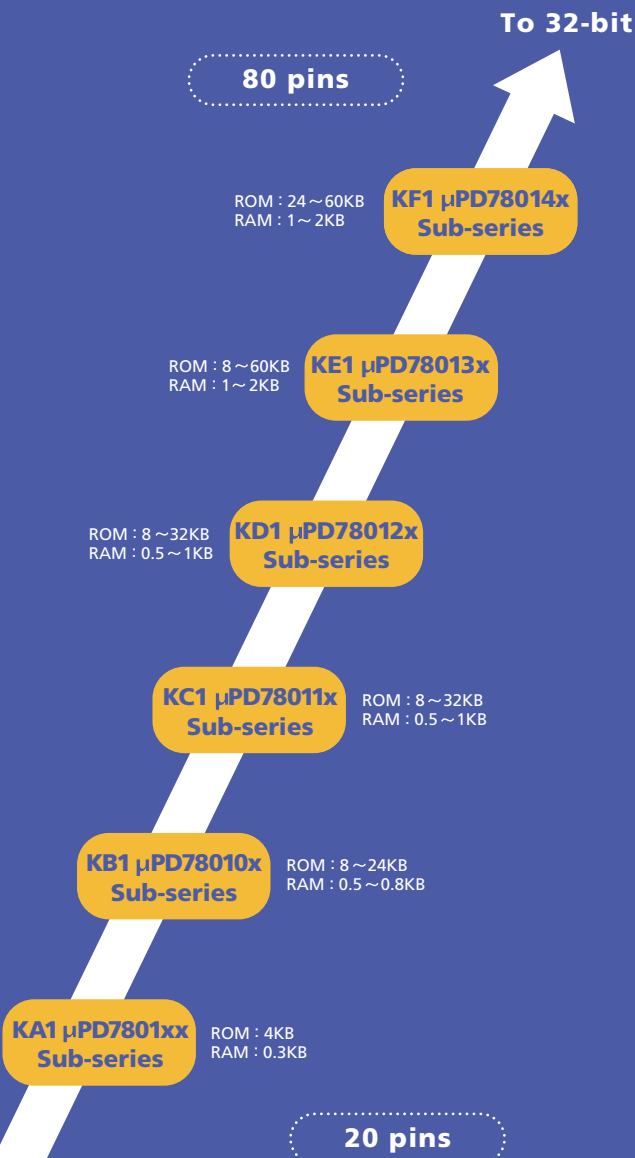

Multi-purpose MCUs

75XL, 78K0

100-pin

D7807x ^A

ROM : 32/40/48/60KB
RAM : 1024B/2048B
A/D : 8-bit × 8
100-pin QFP/LQFP

80-pin

D7805x ^A

Serial I/O expansion

ROM : 16/24/32/40/48/60KB
RAM : 512B/1024B/2048B
A/D : 8-bit × 8
80-pin QFP/TQFP

64-pin

D7801xF ^A

Speed up

ROM : 8/16/24/32/40/48/60KB
RAM : 512B/1024B/2048B
A/D : 8-bit × 8
64-pin QFP/LQFP/SDIP

52-pin

D75006x ^A

To 8-bit

44-pin

ROM : 4/6/8KB
RAM : 512 nibbles
A/D : 8-bit × 8
42-pin SSOP/SDIP

D75000x

To 8-bit

ROM : 4/6/8KB
RAM : 512 nibbles
42-pin SDIP/44-pin QFP

28- to 36-pin

D75430x

To 8-bit

ROM : 2/4KB
RAM : 256 nibbles
36-pin SSOP

20-pin

78K0



78K05



K1 family

D78005x/B

ROM : 24/32/40/48/60KB
RAM : 1024B/2048B
A/D : 8-bit × 8
80-pin LQFP/TQFP

Speed up, RAM expansion

D780065

ROM : 40KB
RAM : 5120B
A/D : 8-bit × 8
80-pin LQFP

Low noise, POR built-in

D78098x

ROM : 16/24/32/48/60KB
RAM : 1024B/2048B
A/D : 10-bit × 8
64-pin LQFP/TQFP/SDIP

KE1 D78014x

ROM : 24/32/48/60KB
RAM : 1024B/2048B
A/D : 10-bit × 8
80-pin LQFP/TQFP

D78002xA

ROM : 8/16/24/32KB
RAM : 512B/1024B
A/D : 8-bit × 8
64-pin LQFP/TQFP/
SDIP/BGA

10-bit ADC

D78003xA

ROM : 8/16/24/32KB
RAM : 512B/1024B
A/D : 10-bit × 8
64-pin LQFP/TQFP/SDIP/
BGA (Under Development)

ROM, RAM expansion

D78007x

ROM : 48/60KB
RAM : 2048B
A/D : 10-bit × 8
64-pin LQFP/TQFP

POR built-in

KE1 D78013x

ROM : 8/16/24/32/48/60KB
RAM : 1024B/2048B
A/D : 10-bit × 8
64-pin LQFP/TQFP

D78916x

ROM : 16/24KB
RAM : 512B
A/D : 8-bit × 8
44-pin LQFP

10-bit ADC

D78917x

ROM : 16/24KB
RAM : 512B
A/D : 10-bit × 8
44-pin LQFP

POR built-in

KD1 D78012x

ROM : 8/16/24/32KB
RAM : 512B/1024B
A/D : 10-bit × 8
52-pin LQFP

D78902x

ROM : 4/8/12/16KB
RAM : 256B/512B
44-pin LQFP

10-bit ADC

D789046

ROM : 16KB
RAM : 512B
44-pin LQFP

D78901x

ROM : 2/4KB
RAM : 128B
28-pin SOP/SDIP

ADC built-in

D78910xA /2xA

ROM : 2/4/8KB
RAM : 256B
A/D : 8-bit × 4
30-pin SSOP

10-bit ADC

D78911xA /3xA

ROM : 2/4/8KB
RAM : 256B
A/D : 10-bit × 4
30-pin SSOP

POR built-in

KB1 D78010x

ROM : 8/16/24KB
RAM : 512B/768B
A/D : 10-bit × 4
30-pin SSOP

I/O, ROM/RAM expansion

D78907x

ROM : 2/4/8KB
RAM : 256B
I/O : 24
30-pin SSOP

POR built-in

D78908x

ROM : 16/32KB
RAM : 384B/576B
I/O : 24
30-pin SSOP

POR built-in

KA1 D7801xx

ROM : 4KB
RAM : 256B
A/D : 10-bit × 4
20-pin SSOP

D789052 /62

ROM : 4KB
RAM : 128B
I/O : 14
20-pin SSOP



MP



Under Development



Under Planning



Recommended



A ADC



E EEPROM™



P POR

75XL, 78K0 ▶ 78K0 **n** 78K0S **□**

DOT LCD

D789830^D

ROM : 24KB
DOT LCD : 40 × 16
88-pin die form

D78983x^{B A P D}

ROM : 24/32/48/60KB
DOT LCD : 48 × 48, 64 × 32, 80 × 16, 80 × 8
A/D : 8-bit × 3
Sound generator
144-pin LQFP/die form

ROM, DOT expansion

120-pin

D78031x^{B A}

ROM : 48/60KB
LCD : 96-seg
A/D : 10-bit × 10
120-pin TQFP/BGA

D78032x^{B A}

ROM : 48/60KB
LCD : 128-seg
A/D : 10-bit × 10
120-pin TQFP/BGA

Seg. expansion

D78033x^{B A}

ROM : 48/60KB
LCD : 160-seg
A/D : 10-bit × 10
120-pin TQFP/BGA

Seg. expansion

100-pin

D7806x/30x^A

ROM : 16/24/32/48/60KB
LCD : 160-seg
A/D : 8-bit × 8
100-pin QFP/LQFP

D78034x^{B P}

ROM : 24/32KB
LCD : 160-seg
A/D : 8-bit × 10
100-pin LQFP/BGA

Speed up

D78035x^{B P}

ROM : 24/32KB
LCD : 160-seg
A/D : 10-bit × 10
100-pin LQFP/BGA

10-bit ADC

80-pin

D753036

ROM : 16KB
LCD : 80-seg
A/D : 8-bit × 8
80-pin QFP/TQFP

D78940xA^A

ROM : 12/16/24KB
LCD : 112-seg
A/D : 8-bit × 7
80-pin LQFP/TQFP

Seg. expansion

D78941xA^A

ROM : 12/16/24KB
LCD : 112-seg
A/D : 10-bit × 7
80-pin LQFP/TQFP

10-bit ADC

D789477^A

ROM : 24KB
LCD : 112-seg
A/D : 8-bit × 8
Remote control receiver
80-pin LQFP/TQFP

Remote control receiver built-in

D75310x

ROM : 12/16/24KB
LCD : 128-seg
80-pin QFP/LQFP/TQFP

D789488^{B A}

ROM : 32KB
LCD : 112-seg
A/D : 10-bit × 8
80-pin LQFP/TQFP

Booster built-in

64-pin

D75310x

ROM : 4/6/8KB
LCD : 96-seg
64-pin QFP/LQFP/TQFP

D78930x/1x^B

ROM : 8/16KB
LCD : 96-seg
64-pin QFP/TQFP

Speed up

D78942x/3x^{B A}

ROM : 12/16KB
LCD : 20-seg
A/D : 8-/10-bit × 6
64-pin TQFP

ADC built-in

D78944x/5x^{B A}

ROM : 12/16KB
LCD : 60-seg
A/D : 8-/10-bit × 6
64-pin TQFP

Seg. expansion

D789xxx^P

ROM : 4/8/16/24KB
LCD : 112-seg
64-pin QFP/TQFP

D789xxx^{B A P}

ROM : 4/8/16/24KB
LCD : 128-seg
A/D : 8-bit × 2
64-pin QFP/TQFP

ADC, Booster built-in

48-pin to 52-pin

D78320X

ROM : 4/6/8KB
LCD : 48-seg
48-pin SSOP

D78932X^P

ROM : 4/8/16/24KB
LCD : 96-seg
52-pin LQFP

ROM, Seg. expansion


D78946X^{B A P}

ROM : 4/8/16/24KB
LCD : 92-seg
A/D : 8-bit × 1
52-pin LQFP


ADC, Booster built-in

MP Under Development Under Planning Recommended B Booster A ADC P POR D DOT

VFD control

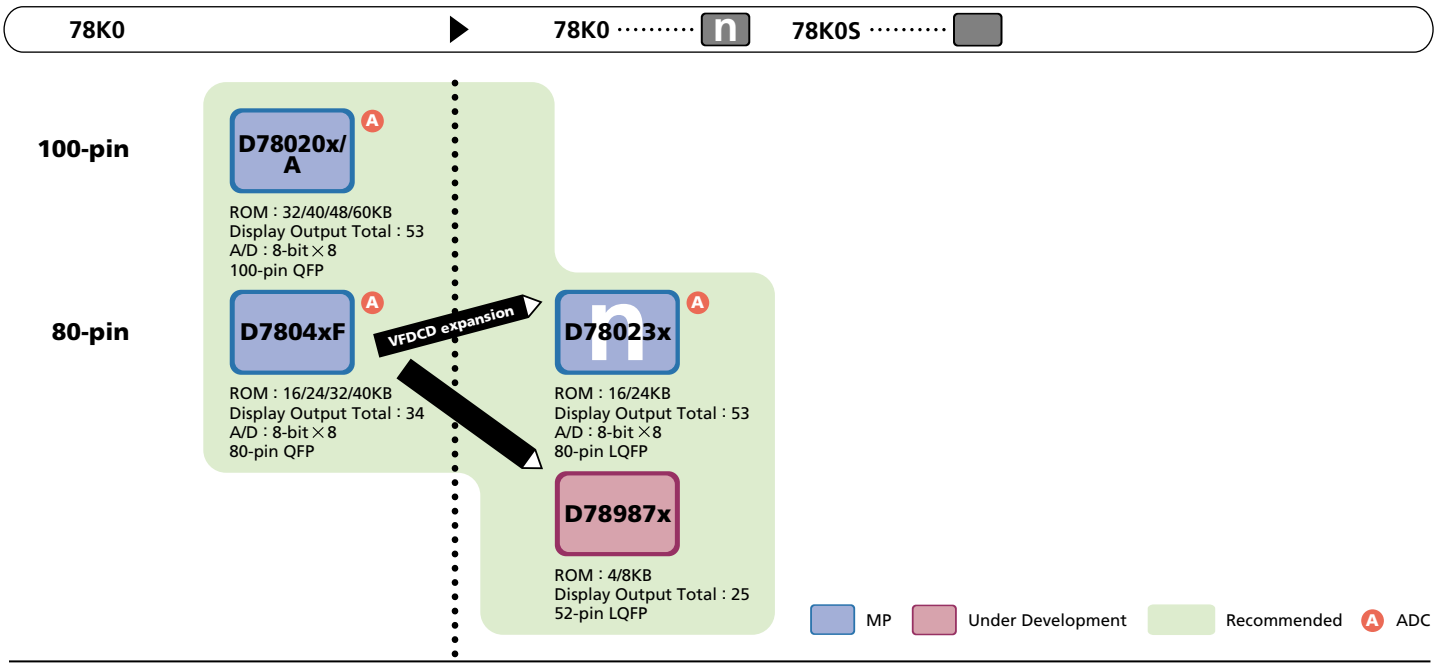

ASSPs

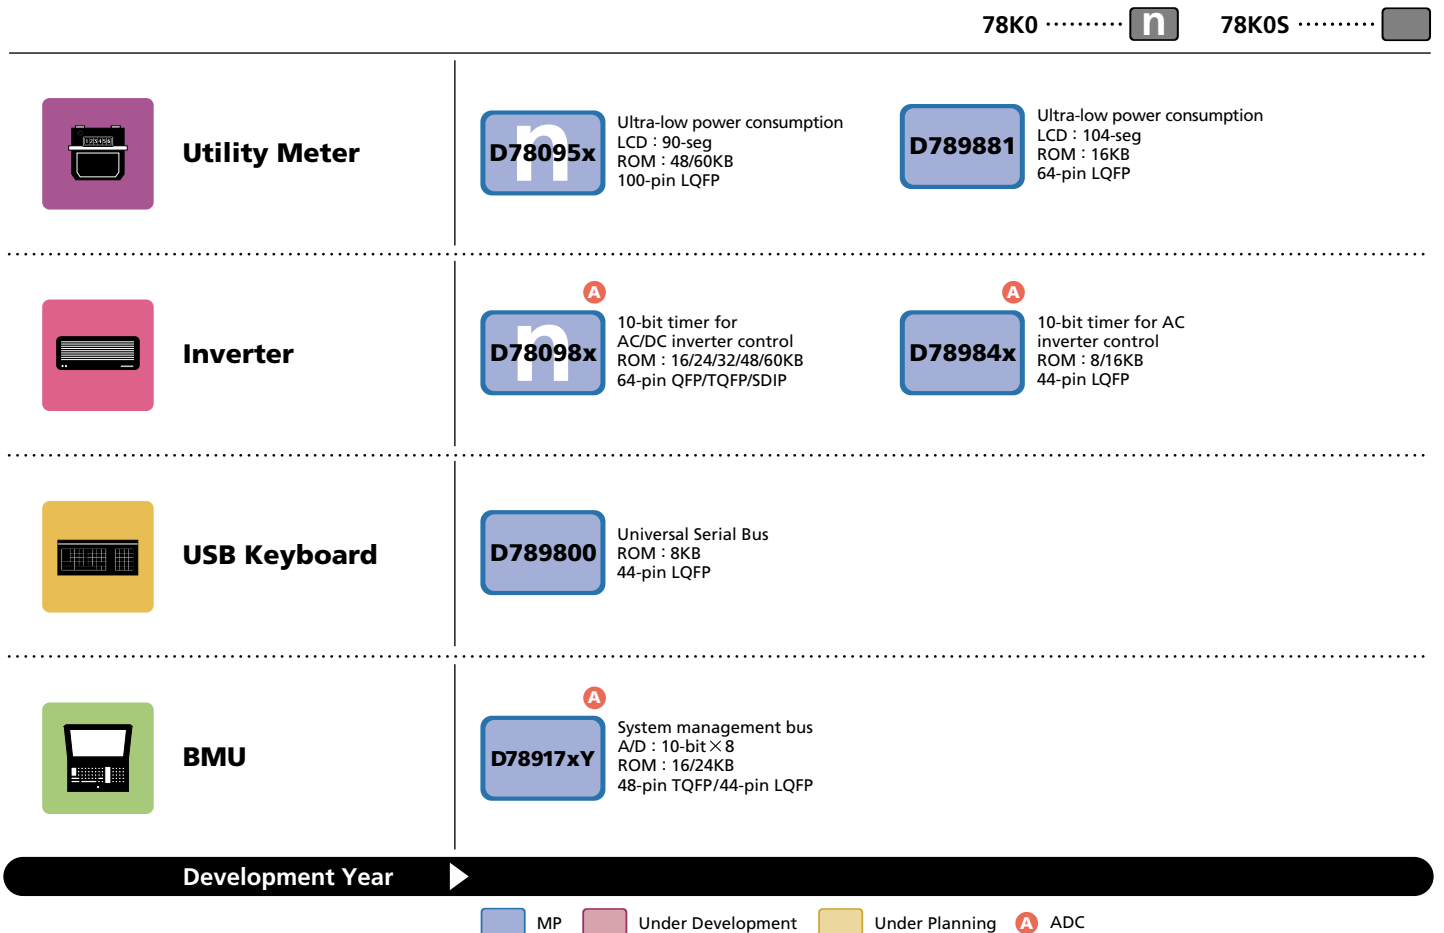



78K0 **n**

78K0S

CAN



DCAN(500Kbps)
ROM : 32/48KB
64-pin LQFP/TQFP



DCAN(500Kbps)
LCD : 112-seg
Stepper motor control/drive
Cross coil control/drive
ROM : 32/48KB
80-pin LQFP



DCAN(500Kbps)
ROM : 60KB
80-pin LQFP



DCAN(500Kbps)
LCD : 160-seg
Sound generator
ROM : 60KB
100-pin QFP



DCAN(500Kbps)
ROM : 16KB
30-pin SSOP



DCAN(500Kbps)
ROM : 24/32KB
44-pin LQFP

J1850




J1850 bus interface
ROM : 48/60KB
80-pin LQFP



J1850 bus interface
LCD : 160-seg
Stepper motor control/drive
Cross coil control/drive
ROM : 48KB
100-pin LQFP

IEBus™




IEBus interface
ROM : 40/48/60KB
80-pin QFP/LQFP




IEBus interface
ROM : 60KB
80-pin LQFP

Dash Board




LCD : 80-seg
Stepper motor control/drive
Cross coil control/drive
ROM : 32/40KB
80-pin LQFP

Keyless Entry



ROM : 4KB
RAM : 128 nibbles
EEPROM : 16B
20-pin SSOP



ROM : 4KB
RAM : 128B
EEPROM : 32B
20-pin SSOP



ROM : 16KB
RAM : 512B
EEPROM : 256B
30-pin SSOP

CD Text



ROM : 40KB
RAM : 5120B
A/D : 8-bit X 8
80-pin LQFP

Development Year



MP




Under Development




Under Planning



Dash Board



Body Control



Car Audio

Product List

Multi-purpose MCUs

Series	Part Number	Package	ROM (kbytes)	RAM (bytes)	EEPROM (bytes)	I/O	Timer	PWM	Serial I/O	ADC	LCD C/D	Sub Clock	Note
78K0/ Kx1	KB1(78010x)	30-pin SSOP	8/16/24	512 768	—	22	5	8-bit×3	3(UART×2) ^{※1}	10-bit×4	—	—	LIN,POR,LVI, Ring-osc
	KC1(78011x)	44-pin LQFP	8/16/24/32	512 1K	—	32	7	8-bit×4	3(UART×2)	10-bit×8	—	○	LIN,POR,LVI, Ring-osc
	KD1(78012x)	52-pin LQFP	8/16/24/32	512 1K	—	39	7	8-bit×4	3(UART×2)	10-bit×8	—	○	LIN,POR,LVI, Ring-osc
	KE1(78013x)	64-pin LQFP/ TQFP	8/16/24/ 32/48/60	512 1K/2K	—	51	8 ^{※2}	8-bit×4	4(UART×2) ^{※3}	10-bit×8	—	○	LIN,POR,LVI, Ring-osc
	KF1(78014x)	80-pin LQFP/ TQFP	24/32/48/60	1K 2K	—	67	8 ^{※4}	8-bit×4	5(UART×2) ^{※5}	10-bit×8	—	○	LIN,POR,LVI, Ring-osc
78K05	789052	20-pin SSOP	4	128	—	14	3	8-bit×1	—	—	—	—	Cera
	789062	20-pin SSOP	4	128	—	14	3	8-bit×1	—	—	—	—	RC
	789071/2/4	30-pin SSOP	2/4/8	256	—	24	3	8-bit×1	1(UART×1)	—	—	—	
	789086/8	30-pin SSOP	16/32	384 576	—	24	3	8-bit×1	1(UART×1)	—	—	—	POR
	789101/2/4A	30-pin SSOP	2/4/8	256	—	20	3	8-bit×1	1(UART×1)	8-bit×4	—	—	Cera
	789121/2/4A	30-pin SSOP	2/4/8	256	—	20	3	8-bit×1	1(UART×1)	8-bit×4	—	—	RC
	789111/2/4A	30-pin SSOP	2/4/8	256	—	20	3	8-bit×1	1(UART×1)	10-bit×4	—	—	Cera
	789131/2/4A	30-pin SSOP	2/4/8	256	—	20	3	8-bit×1	1(UART×1)	10-bit×4	—	—	RC
	789022/4/5/6	44-pin LQFP	4/8/12/16	256 512	—	34	3	—	1(UART×1)	—	—	—	
	789046	44-pin LQFP	16	512	—	34	4	8-bit×1	1(UART×1)	—	—	○	
	789166/7	44-pin LQFP	16/24	512	—	31	6	8-bit×3	1(UART×1)	8-bit×8	—	○	
	789176/7	44-pin LQFP	16/24	512	—	31	6	8-bit×3	1(UART×1)	10-bit×8	—	○	
	78K0	780021/2/3/4AS	52-pin LQFP	8/16/24/32	512 1024	—	39	5	8-bit×2	3(UART×1)	8-bit×4	—	○
780031/2/3/4AS		52-pin LQFP	8/16/24/32	512 1024	—	39	5	8-bit×2	3(UART×1)	10-bit×4	—	○	
780021/2/3/4A		64-pin LQFP/TQFP/ SDIP/BGA(U.D)	8/16/24/32	512 1024	—	51	5	8-bit×2	3(UART×1)	8-bit×8	—	○	
780031/2/3/4A		64-pin LQFP/TQFP/ SDIP/BGA(U.D)	8/16/24/32	512 1024	—	51	5	8-bit×2	3(UART×1)	10-bit×8	—	○	
780076/8		64-pin LQFP/TQFP	48/60	2048	—	52	6	8-bit×2	3(UART×2)	10-bit×8	—	○	
780982/3/4/6/8		64-pin LQFP/ TQFP/SDIP	16/24/32/ 48/60	1024 2048	—	47	7	8-bit×2	3(UART×2)	10-bit×8	—	—	
780053/4/5/6/8		80-pin LQFP/TQFP	24/32/48/60	1024 2048	—	68	5	14-bit×1	3(UART×1)	8-bit×8	—	○	
780065		80-pin LQFP	40	5120	—	60	5	8-bit×2	4(UART×1)	8-bit×8	—	○	
78074B/5B/6/8		100-pin QFP/LQFP	32/40/48/60	1024 2048	—	88	7	14-bit×1 8-bit×2	3(UART×1)	8-bit×8	—	○	

※1.UART×1(8K ROM) ※2.7ch(8K/16K ROM) ※3.3ch(8K/16K ROM) ※4.7ch(24K/32K ROM) ※5.4ch(24K/32K ROM)

LCD control

Series	Part Number	Package	ROM (kbytes)	RAM (bytes)	EEPROM (bytes)	I/O	Timer	PWM	Serial I/O	ADC	LCD C/D	Sub Clock	Note
78K05	789322/4/6/7	52-pin LQFP	4/8/16/24	256 512	—	21	4	8-bit×1	1	—	24-seg×4	○	POR
	789462/4/6/7	52-pin LQFP	4/8/16/24	256 512	—	13	4	8-bit×1	—	8-bit×1	23-seg×4	○	Booster POR
	789304/6	64-pin QFP/TQFP	8/16	512	—	23	5	8-bit×1	2(UART×1)	—	24-seg×4	○	Booster
	789314/6	64-pin QFP/TQFP	8/16	512	—	23	5	8-bit×1	2(UART×1)	—	24-seg×4	○	Booster RC
	789425/6	64-pin LQFP/TQFP	12/16	512	—	40	5	8-bit×2	1(UART×1)	8-bit×6 10-bit×6	5-seg×4	○	Booster
	789435/6	64-pin LQFP/TQFP	12/16	512	—	40	5	8-bit×2	1(UART×1)	8-bit×6 10-bit×6	5-seg×4	○	Booster RC
	789445/6	64-pin LQFP/TQFP	12/16	512	—	30	5	8-bit×2	1(UART×1)	8-bit×6 10-bit×6	15-seg×4	○	Booster
	789455/6	64-pin LQFP/TQFP	12/16	512	—	30	5	8-bit×2	1(UART×1)	8-bit×6 10-bit×6	15-seg×4	○	Booster RC
	789405/6/7A	80-pin LQFP/TQFP	12/16/24	512	—	43	6	—	1(UART×1)	8-bit×7	28-seg×4	○	
	789415/6/7A	80-pin LQFP/TQFP	12/16/24	512	—	43	6	—	1(UART×1)	10-bit×7	28-seg×4	○	
	789477	80-pin LQFP/TQFP	24	768	—	45	6	—	2(UART×1)	8-bit×8	28-seg×4	○	Remote control receiver
789488	80-pin LQFP/TQFP	32	1024	—	45	6	—	2(UART×1)	10-bit×8	28-seg×4	○	Booster	
78K0	78062/3/4	100-pin QFP/LQFP	16/24/32	512/1024	—	57	5	14-bit×1	2(UART×1)	8-bit×8	40-seg×4	○	
	780306/8	100-pin QFP/LQFP	48/60	2048	—	57	5	14-bit×1	3(UART×1)	8-bit×8	40-seg×4	○	
	780343/4	100-pin LQFP/ FPBGA	24/32	1024	—	66	7	8-bit×3	3(UART×1)	8-bit×8	40-seg×4	○	

Product List

LCD control

Series	Part Number	Package	ROM (Kbytes)	RAM (bytes)	EEPROM (bytes)	I/O	Timer	PWM	Serial I/O	ADC	LCD C/D	Sub Clock	Note
78K0	780353/4	100-pin LQFP/FPBGA	24/32	1024	—	66	7	8-bit×3	3(UART×1)	10-bit×10	40-seg×4	○	
	780316/8	120-pin TQFP/FPBGA	48/60	2560	—	70	7	8-bit×3	2(UART×1)	10-bit×10	24-seg×4	○	Booster
	780326/8	120-pin TQFP/FPBGA	48/60	2560	—	62	7	8-bit×3	2(UART×1)	10-bit×10	32-seg×4	○	Booster
	780336/8	120-pin TQFP/FPBGA	48/60	2560	—	54	7	8-bit×3	2(UART×1)	10-bit×10	40-seg×4	○	Booster
78K05	789830	88-pin die from	24	1024	—	30	4	—	1(UART×1)	—	40×16	○	DOT LCD
	789832/3/4/5	144-pin LQFP/die from	24/32/48	2000	—	28	8	8-bit×2	1(UART×1)	8bit	48×48 64×32 80×16 80×8	○	Booster POR, DOT LCD

VFD control

Series	Part Number	Package	ROM (Kbytes)	RAM (bytes)	EEPROM (bytes)	I/O	Timer	PWM	Serial I/O	ADC	LCD C/D	Sub Clock	Note
78K05	789870/1	52-pin LQFP	4/8	512	—	33	5	—	1	—	—	○	
78K0	780232/3	80-pin LQFP	16/24	768	—	40	4	8-bit×2	2	8-bit×4	—	—	
	78042/3/4/5F	80-pin LQFP	16/24/32/40	624 1136	—	68	6	14-bit×1	2	8-bit×8	—	○	
	780204/5/6/8	100-pin LQFP	32/40/48/60	1168 2192	—	74	5	14-bit×1	2	8-bit×8	—	○	

ASSPs

Series	Part Number	Package	ROM (Kbytes)	RAM (bytes)	EEPROM (bytes)	I/O	Timer	PWM	Serial I/O	ADC	LCD C/D	Sub Clock	Note
78K05	789841/2	44-pin LQFP	8/16	256	—	30	6	—	1(UART×1)	8-bit×8	—	—	for inverter
	789800	44-pin LQFP	8	256	—	31	3	—	2(USB×1)	—	—	—	for USB keyboard
	789176/7Y	44-pin LQFP 48-pin TQFP	16/24	512	—	31	6	8-bit×3	2(UART×1, SMB×1)	10-bit×8	—	○	for BMU
	789881	64-pin LQFP	16	512	—	28	4	8-bit×2	1(UART×1)	—	26-seg×4	○	for utility meter
78K0	780957/8	100-pin LQFP	48/60	2048	—	69	7	—	2(UART×1)	—	30-seg×3	○	for utility meter
	780982/3/4/6/8	64-pin QFP/ TQFP/SDIP	16/24/32/ 48/60	1024/2048	—	47	7	8-bit×3	3(UART×2)	10-bit×8	—	—	for inverter

Automotive ASSPs

Series	Part Number	Package	ROM (Kbytes)	RAM (bytes)	EEPROM (bytes)	I/O	Timer	PWM	Serial I/O	ADC	LCD C/D	Sub Clock	Note
78K05	789850	30-pin SSOP	16	768	—	18	3	8-bit×1	2(UART×1)	8-bit×4	—	○	
	789852	44-pin LQFP	24/32	1312	—	31	5	8-bit×3	3(UART×2)	10-bit×8	—	○	
78K0	780814/6	64-pin LQFP/TQFP	32/48	1504	—	46	6	8-bit×2	3(UART×1)	8-bit×12	—	○	for CAN
	780701Y/3Y	80-pin LQFP	60	3360	—	67	7	8-bit×3	4(UART×1, I ² C×1)	8-bit×16	—	—	
	780824/6B	80-pin LQFP	32/48	1504	—	59	6	8-bit×2	2(UART×1)	8-bit×5	28-seg×4	—	
	780948	100-pin QFP	60	2016	—	79	6	8-bit×2	3(UART×1)	8-bit×8	40-seg×3	—	
	780830/3Y	80-pin LQFP	40/60	2016	—	65	7	8-bit×3	4(UART×1, I ² C×1)	8-bit×16	—	—	for J1850
	780834	100-pin LQFP	48	3072	—	79	7	8-bit×4	2(UART×1)	8-bit×4	40-seg×3	—	
	78095/6/8B	80-pin QFP/LQFP	40/48/60	1024 3072	—	69	5	8-bit×2	3(UART×1)	8-bit×8	—	○	for IEBUS
	780702Y	80-pin LQFP	60	3072	—	67	7	8-bit×3	4(UART×1, I ² C×1)	8-bit×16	—	—	
	780851/2	80-pin LQFP	32/40	1536	—	56	6	8-bit×2	3(UART×1)	8-bit×5	20-seg×4	—	for dash board
78K05	789860/1	20-pin SSOP	4	128	32	14	3	8-bit×1	—	—	—	—	for keyless entry
	789862	30-pin SSOP	16	512	256	22	4	8-bit×1	2(UART×1)	—	—	—	for keyless entry

Purchase of NEC I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

The export of these products from Japan is regulated by the Japanese government. The export of some or all of these products may be prohibited without governmental license. To export or re-export some or all of these products from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

• The information in this document is current as of September, 2002. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.

- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
"Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

(1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.

(2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4

For further information, please contact:

NEC Corporation

NEC Building
7-1, Shiba 5-chome, Minato-ku
Tokyo 108-8001, Japan
Tel: 03-3454-1111
<http://www.ic.nec.co.jp/>

[North & South America]

NEC Electronics Inc.

2880 Scott Blvd.
Santa Clara, CA 95050-2554, U.S.A.
Tel: 408-588-6000
800-366-9782
Fax: 408-588-6130
800-729-9288
<http://www.necel.com/>

NEC do Brasil S.A.

Electron Devices Division
Rodovia Presidente Dutra, Km 214
07210-902-Guarulhos-SP Brasil
Tel: 011-6462-6810
Fax: 011-6462-6829

[Europe]

NEC Electronics (Europe) GmbH

Oberrather Str. 4
40472 Düsseldorf, Germany
Tel: 0211-6503-01
Fax: 0211-6503-327
<http://www.ee.nec.de/>

Branch The Netherlands

Boschdijk 187a
5612 HB Eindhoven,
The Netherlands
Tel: 040-2445845
Fax: 040-2444580

Branch Sweden

P.O. Box 134
18322 Taebby, Sweden
Tel: 08-6380820
Fax: 08-6380388

NEC Electronics (UK) Limited

Cygnus House, Sunrise Parkway,
Linford Wood, Milton Keynes,
MK14 6NP, U.K.
Tel: 01908-691-133
Fax: 01908-670-290

NEC Electronics (France) S.A.

9, rue Paul Dautier-B.P. 52
78142 Velizy-Villacoublay Cédex
France
Tel: 01-3067-5800
Fax: 01-3067-5899

Madrid Office

Juan Esplandiu, 15
28007 Madrid, Spain
Tel: 091-504-2787
Fax: 091-504-2860

NEC Electronics Italiana s.r.l.

Via Fabio Filzi, 25/A,
20124 Milano, Italy
Tel: 02-667541
Fax: 02-66754299

[Asia & Oceania]

NEC Electronics Hong Kong Limited

12/F., Cityplaza 4,
12 Taikoo Wan Road, Hong Kong
Tel: 2886-9318
Fax: 2886-9022/9044

Seoul Branch

10F, ILSONG Bldg., 157-37,
Samsung-Dong, Kangnam-Ku
Seoul, the Republic of Korea
Tel: 02-528-0303
Fax: 02-528-4411

NEC Electronics Shanghai, Ltd.

7th Floor, HSBC Tower, 101Yin Cheng Road,
Pudong New Area, Shanghai P.R. China
Tel: 021-6841-1138
Fax: 021-6841-1137

NEC Electronics Taiwan Ltd.

7F, No. 363 Fu Shing North Road
Taipei, Taiwan, R. O. C.
Tel: 02-2719-2377
Fax: 02-2719-5951

NEC Electronics Singapore Pte. Ltd.

238A Thomson Road
#12-01/10 Novena Square
Singapore 307684
Tel: 253-8311
Fax: 250-3583