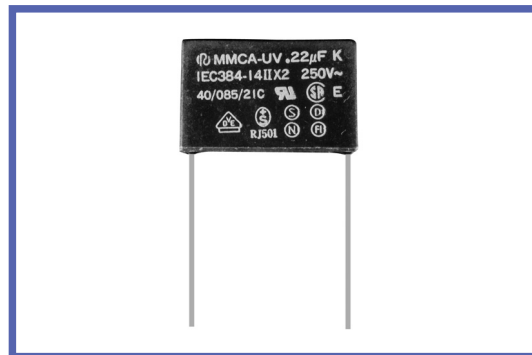
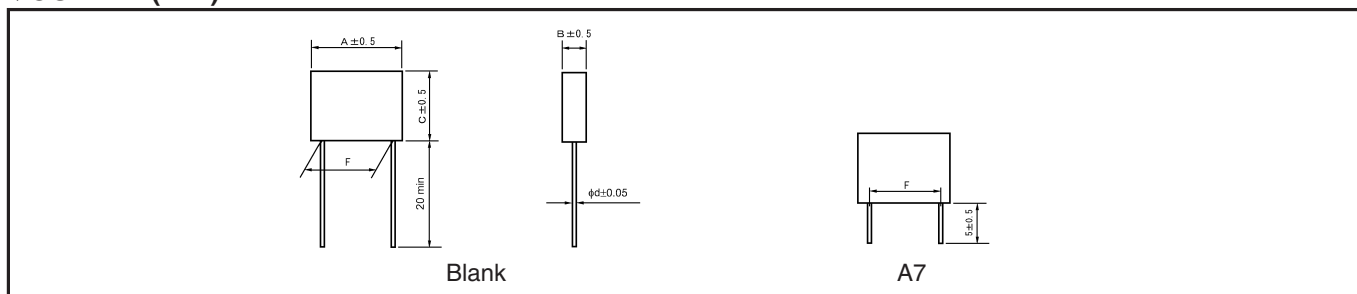


MMCA-UV SERIES
◆ FEATURES

- Approved by UL, CSA, VDE, SEMKO, DEMKO, NEMKO, SETI, SEV.
- For across-the-line (European safety regulation class X2).
- Outer cover is flame-retardant (UL94 V-0) plastic case.


◆ SPECIFICATIONS

Category temperature	-40°C~+85°C		
Rated voltage (U _R)	250VAC		
Capacitance tolerance	±10%(K), ±20%(M)		
tan δ	0.01max at 1kHz		
Voltage proof	1500VAC, 1075VDC 60s		
Insulation resistance	15000MΩ min		
Approved	UL	UL1414	File No. E68624
	CSA	CSA C22.2 No.0, No.1	File No. LR54220
	VDE	IEC 60384-14, 2nd Ed. Table II, Safety tests incl. Amendment 1. (=EN 132400)	File No. 13491-4670-8003
	SEMKO		Ref. No. 01.0062
	DEMKO		Ref. No. 954711201
	NEMKO		Ref. No. 305035
	SETI		Ref. No. P96100128
	SEV		Reg. No. 187965

◆ OUTLINE(mm)

◆ PART NUMBER

250
Rated Voltage
MMCA
Series
□□□
Rated capacitance
□
Tolerance
UV
Sub mark
□□
Suffix

↓

Symbol	U _R
250	250VAC

↓

Symbol	Tolerance
K	±10%
M	±20%

↓

Symbol	Lead style
Blank	Long lead type
A7	Lead cut

◆ DIMENTIONS AND QUANTITY
◆ RATED VOLTAGE : 250VDC

Part No.	cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)					
								Long Lead type		Taping Ammo pack type - style			
		A	B	C	F±0.75	LS±0.5	d	Bag	Carton	A	B, D	C	E
250MMCA103□UV**	0.01	17.5	4.0	10.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA123□UV**	0.012	17.5	4.0	10.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA153□UV**	0.015	17.5	4.0	10.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA183□UV**	0.018	17.5	4.0	10.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA223□UV**	0.022	17.5	4.0	10.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA273□UV**	0.027	17.5	5.0	11.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA333□UV**	0.033	17.5	5.0	11.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA393□UV**	0.039	17.5	5.5	12.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA473□UV**	0.047	17.5	5.5	12.0	15.0	-	0.6	200	2,000	-	-	-	-
250MMCA563□UV**	0.056	17.5	7.0	13.0	15.0	-	0.6	200	1,000	-	-	-	-
250MMCA683□UV**	0.068	17.5	7.0	13.0	15.0	-	0.6	200	1,000	-	-	-	-
250MMCA823□UV**	0.082	17.5	8.0	14.5	15.0	-	0.6	200	1,000	-	-	-	-
250MMCA104□UV**	0.1	17.5	8.0	14.5	15.0	-	0.6	200	1,000	-	-	-	-
250MMCA124□UV**	0.12	25.5	6.5	16.0	22.5	-	0.8	200	800	-	-	-	-
250MMCA154□UV**	0.15	25.5	6.5	16.0	22.5	-	0.8	200	800	-	-	-	-
250MMCA184□UV**	0.18	25.5	8.5	16.5	22.5	-	0.8	100	800	-	-	-	-
250MMCA224□UV**	0.22	25.5	8.5	16.5	22.5	-	0.8	100	800	-	-	-	-
250MMCA274□UV**	0.27	30.5	10.0	17.5	27.5	-	0.8	100	500	-	-	-	-
250MMCA334□UV**	0.33	30.5	10.0	17.5	27.5	-	0.8	100	500	-	-	-	-
250MMCA394□UV**	0.39	30.5	12.0	19.5	27.5	-	0.8	100	500	-	-	-	-
250MMCA474□UV**	0.47	30.5	12.0	19.5	27.5	-	0.8	100	500	-	-	-	-
250MMCA564□UV**	0.56	30.5	13.5	23.0	27.5	-	0.8	100	400	-	-	-	-
250MMCA684□UV**	0.68	30.5	13.5	23.0	27.5	-	0.8	100	400	-	-	-	-
250MMCA824□UV**	0.82	30.5	16.5	26.0	27.5	-	0.8	50	200	-	-	-	-
250MMCA105□UV**	1.0	30.5	16.5	26.0	27.5	-	0.8	50	200	-	-	-	-

□ : Tolerance(K:±10%, M:±20%)

** : Suffix